# APPENDIX A

# SUPPLEMENTAL NOTICE OF PREPARATION AND SCOPING COMMENTS

**This page intentionally left blank**

# SUPPLEMENTAL NOTICE OF PREPARATION

**This page intentionally left blank**

# PUBLIC NOTICE/SUPPLEMENTAL NOTICE OF PREPARATION OF A REVISED DRAFT ENVIRONMENTAL IMPACT REPORT

| | |
|---|---|
| **Date:** | July 19, 2024 |
| **To:** | Reviewing Agencies, Owners (500' radius), Occupants (100' radius), and Other Interested Parties |
| **Subject:** | Supplemental Notice of Preparation of a Revised Draft Environmental Impact Report |
| **Project Title:** | Dana Point Harbor Hotels |
| **Project Applicant:** | City of Dana Point |
| **Scoping Meeting:** | August 14, 2024, at 6:00 p.m. |

**PROJECT DESCRIPTION:** The City of Dana Point (City) is the Lead Agency responsible for analyzing the potential environmental impacts associated with the proposed Dana Point Harbor Hotels (proposed project) at 24800 Dana Point Harbor Drive. A Draft Environmental Impact Report (EIR) for the originally proposed project was circulated for public review from April 20, 2021, through June 14, 2021. Since that time, design modifications to the originally proposed project have occurred, warranting the preparation of a revised Draft EIR. Modifications to the proposed project primarily consist of additional affordable guest rooms within one of the proposed hotels.

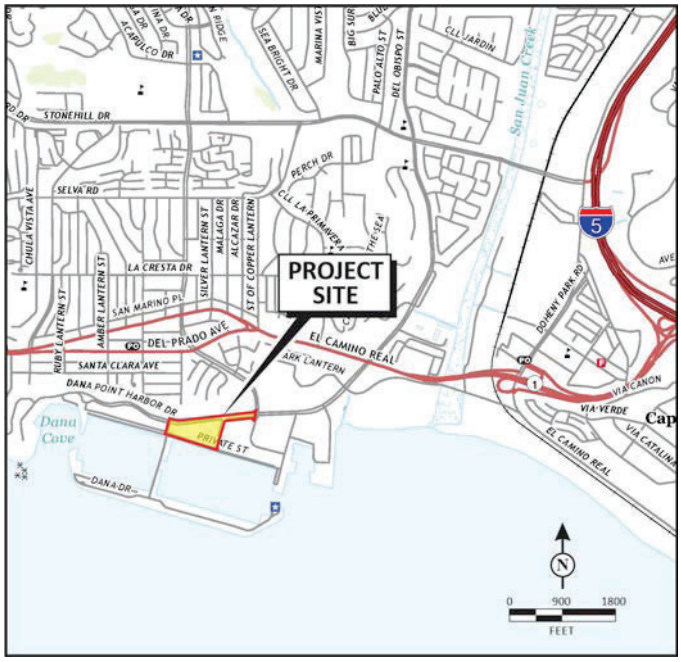


The project site is currently developed with the Dana Point Marina Inn on the central portion of the project site and two boater services buildings with surface parking reserved for boaters on the southern portion of the project site. Surrounding land uses include Heritage Park located to the north, restaurant and retail uses to the east, and marina uses located south, east, and west of the project site. According to the City's General Plan, the project site is designated Visitor/Recreation Commercial (V/RC) and Harbor Marine Land (HML). According to the Dana Point Zoning Code, Dana Point Harbor is zoned Dana Point Harbor Revitalization Plan and District Regulations - Zoning Code (DPHRP-ZC). Within the boundaries of the Dana Point Harbor Revitalization Plan and District Regulations (DPHRP&DR), the majority of the project site is located within Planning Area 3, which is designated as Visitor Serving Commercial (VSC). The proposed project also includes landscaping and minor infrastructure improvements in Planning Area 4, designated Marine Commercial (MC), and Planning Area 2, designated Day Use Commercial (DUC).

The proposed project involves the demolition of the Dana Point Marina Inn, two boater service buildings, and parking areas on the project site, and includes the development of two hotels, one of which would include space for boater services, associated ancillary uses, and parking areas, including designated boater and hotel parking. A portion of the designated boater parking would be provided adjacent to the project site. Also included in the proposed project are associated infrastructure improvements necessary to facilitate pedestrian and vehicular access to and from the project site, landscaping improvements, and utility upgrades necessary to implement the proposed project. One of the hotels, Dana House Hotel, would be designed as a boutique hotel including 130 market-rate rooms and associated amenities. The other hotel, Dana Point Surf Lodge, would be an affordable hotel that includes 169 rooms (the originally proposed

project included 139 rooms), and associated amenities. The proposed project requires the following discretionary actions: a Coastal Development Permit, Zone Text Amendment to the certified DPHRP&DR and subsequent Local Coastal Program (LCP) Amendment.

**POTENTIAL ENVIRONMENTAL IMPACTS:** As a result of the analysis in the Initial Study prepared for the originally proposed project, the previously circulated Draft EIR examined potential environmental impacts generated by the originally proposed project in relation to the following Environmental Analysis categories: Aesthetics, Air Quality, Cultural Resources, Energy, Geology and Soils, Greenhouse Gas Emissions, Hazards and Hazardous Materials, Hydrology and Water Quality, Land Use and Planning, Noise, Public Services, Transportation, Tribal Cultural Resources, and Utilities and Service Systems. Because the modified proposed project would be similar in nature to the originally proposed project, and in order to provide a consistent comparison of changes between the two, the EIR for the modified proposed project will analyze the Environmental Analysis categories listed above. A more complete description of the originally proposed project and potential environmental impacts are included in the Initial Study, which is available online at:

*Initial Study: Dana Point Harbor Hotels, Dana Point California*, September 2020

The project site is not included on a list of hazardous materials sites compiled pursuant to Government Code Section 65962.5.

**PROJECT SCOPING PROCESS:** Circulation of this Supplemental Notice of Preparation (NOP) starts a 32-day public review and comment period on the scope of the Draft EIR that **begins on July 19, 2024, and ends on August 19, 2024 at 5:00 p.m**. All interested parties, including the public, responsible agencies, and trustee agencies, are invited to provide comments and input on the scope and content of the environmental analysis to be addressed in the Draft EIR. Responsible and trustee agencies should provide comments and input related to the agencies' respective areas of statutory responsibility. Comments received during the scoping period will be considered during preparation of the Draft EIR. Public agencies and interested parties will have an additional opportunity to comment on the proposed project during the 45-day public review period to be held after the publication and circulation of the revised Draft EIR.

**SCOPING MEETING:** The City of Dana Point will hold a scoping meeting at **6:00 p.m. on Wednesday, August 14, 2024**, in the City Council Chambers located at 33282 Golden Lantern, Dana Point, CA 92629. The purpose of the scoping meeting is to present the proposed project, describe the EIR process, and receive public comments. The City invites interested parties to participate in the scoping meeting for the proposed project in order to learn more about the project, ask questions, and submit comments.

The City of Dana Point requests careful review and consideration of this notice and invites any and all input and comments from interested agencies, parties, organizations, and individuals regarding the preparation of the EIR. This Supplemental NOP is available for view at the City of Dana Point Community Development Department, located at 33282 Golden Lantern, Dana Point, California 92629, and can also be accessed online at:

http://www.danapoint.org/index.aspx?page=281

All comments or other responses to this notice should be submitted in writing to:

Kurth B. Nelson III, Principal Planner
City of Dana Point, Planning Division
33282 Golden Lantern, Suite 209
Dana Point, California 92629
Phone: (949) 248-3572
Email: knelson@danapoint.org

# SCOPING COMMENTS

**This page intentionally left blank**

# NATIVE AMERICAN HERITAGE COMMISSION



**NAHC HEADQUARTERS**
1550 Harbor Boulevard
Suite 100
West Sacramento,
California 95691
(916) 373-3710
nahc@nahc.ca.gov

July 30, 2024

Kurth Nelson
City of Dana Point
33282 Golden Lantern
Suite 209
Dana Point CA 92629

**Re: 2020099024, Dana Point Harbor Hotels, Orange County**

Dear Mr. Nelson:

The Native American Heritage Commission (NAHC) has received the Notice of Preparation (NOP), Draft Environmental Impact Report (DEIR) or Early Consultation for the project referenced above. The California Environmental Quality Act (CEQA) (Pub. Resources Code §21000 et seq.), specifically Public Resources Code §21084.1, states that a project that may cause a substantial adverse change in the significance of a historical resource, is a project that may have a significant effect on the environment. (Pub. Resources Code § 21084.1; Cal. Code Regs., tit.14, §15064.5 (b) (CEQA Guidelines §15064.5 (b)). If there is substantial evidence, in light of the whole record before a lead agency, that a project may have a significant effect on the environment, an Environmental Impact Report (EIR) shall be prepared. (Pub. Resources Code §21080 (d); Cal. Code Regs., tit. 14, § 5064 subd.(a)(1) (CEQA Guidelines §15064 (a)(1)). In order to determine whether a project will cause a substantial adverse change in the significance of a historical resource, a lead agency will need to determine whether there are historical resources within the area of potential effect (APE).

CEQA was amended significantly in 2014. Assembly Bill 52 (Gatto, Chapter 532, Statutes of 2014) (AB 52) amended CEQA to create a separate category of cultural resources, "tribal cultural resources" (Pub. Resources Code §21074) and provides that a project with an effect that may cause a substantial adverse change in the significance of a tribal cultural resource is a project that may have a significant effect on the environment. (Pub. Resources Code §21084.2). Public agencies shall, when feasible, avoid damaging effects to any tribal cultural resource. (Pub. Resources Code §21084.3 (a)). **AB 52 applies to any project for which a notice of preparation, a notice of negative declaration, or a mitigated negative declaration is filed on or after July 1, 2015.** If your project involves the adoption of or amendment to a general plan or a specific plan, or the designation or proposed designation of open space, on or after March 1, 2005, it may also be subject to Senate Bill 18 (Burton, Chapter 905, Statutes of 2004) (SB 18). **Both SB 18 and AB 52 have tribal consultation requirements**. If your project is also subject to the federal National Environmental Policy Act (42 U.S.C. § 4321 et seq.) (NEPA), the tribal consultation requirements of Section 106 of the National Historic Preservation Act of 1966 (154 U.S.C. 300101, 36 C.F.R. §800 et seq.) may also apply.

The NAHC recommends consultation with California Native American tribes that are traditionally and culturally affiliated with the geographic area of your proposed project as early as possible in order to avoid inadvertent discoveries of Native American human remains and best protect tribal cultural resources. Below is a brief summary of portions of AB 52 and SB 18 as well as the NAHC's recommendations for conducting cultural resources assessments.

**Consult your legal counsel about compliance with AB 52 and SB 18 as well as compliance with any other applicable laws**.

AB 52

AB 52 has added to CEQA the additional requirements listed below, along with many other requirements:

**1.** Fourteen Day Period to Provide Notice of Completion of an Application/Decision to Undertake a Project: Within fourteen (14) days of determining that an application for a project is complete or of a decision by a public agency to undertake a project, a lead agency shall provide formal notification to a designated contact of, or tribal representative of, traditionally and culturally affiliated California Native American tribes that have requested notice, to be accomplished by at least one written notice that includes:

- **a.** A brief description of the project.
- **b.** The lead agency contact information.
- **c.** Notification that the California Native American tribe has 30 days to request consultation. (Pub. Resources Code §21080.3.1 (d)).
- **d.** A "California Native American tribe" is defined as a Native American tribe located in California that is on the contact list maintained by the NAHC for the purposes of Chapter 905 of Statutes of 2004 (SB 18). (Pub. Resources Code §21073).

**2.** Begin Consultation Within 30 Days of Receiving a Tribe's Request for Consultation and Before Releasing a Negative Declaration, Mitigated Negative Declaration, or Environmental Impact Report: A lead agency shall begin the consultation process within 30 days of receiving a request for consultation from a California Native American tribe that is traditionally and culturally affiliated with the geographic area of the proposed project. (Pub. Resources Code §21080.3.1, subds. (d) and (e)) and prior to the release of a negative declaration, mitigated negative declaration or Environmental Impact Report. (Pub. Resources Code §21080.3.1(b)).

- **a.** For purposes of AB 52, "consultation shall have the same meaning as provided in Gov. Code §65352.4 (SB 18). (Pub. Resources Code §21080.3.1 (b)).

**3.** Mandatory Topics of Consultation If Requested by a Tribe: The following topics of consultation, if a tribe requests to discuss them, are mandatory topics of consultation:

- **a.** Alternatives to the project.
- **b.** Recommended mitigation measures.
- **c.** Significant effects. (Pub. Resources Code §21080.3.2 (a)).

**4.** Discretionary Topics of Consultation: The following topics are discretionary topics of consultation:

- **a.** Type of environmental review necessary.
- **b.** Significance of the tribal cultural resources.
- **c.** Significance of the project's impacts on tribal cultural resources.
- **d.** If necessary, project alternatives or appropriate measures for preservation or mitigation that the tribe may recommend to the lead agency. (Pub. Resources Code §21080.3.2 (a)).

**5.** Confidentiality of Information Submitted by a Tribe During the Environmental Review Process: With some exceptions, any information, including but not limited to, the location, description, and use of tribal cultural resources submitted by a California Native American tribe during the environmental review process shall not be included in the environmental document or otherwise disclosed by the lead agency or any other public agency to the public, consistent with Government Code §6254 (r) and §6254.10. Any information submitted by a California Native American tribe during the consultation or environmental review process shall be published in a confidential appendix to the environmental document unless the tribe that provided the information consents, in writing, to the disclosure of some or all of the information to the public. (Pub. Resources Code §21082.3 (c)(1)).

**6.** Discussion of Impacts to Tribal Cultural Resources in the Environmental Document: If a project may have a significant impact on a tribal cultural resource, the lead agency's environmental document shall discuss both of the following:

- **a.** Whether the proposed project has a significant impact on an identified tribal cultural resource.
- **b.** Whether feasible alternatives or mitigation measures, including those measures that may be agreed to pursuant to Public Resources Code §21082.3, subdivision (a), avoid or substantially lessen the impact on the identified tribal cultural resource. (Pub. Resources Code §21082.3 (b)).

**7.** Conclusion of Consultation: Consultation with a tribe shall be considered concluded when either of the following occurs:

**a.** The parties agree to measures to mitigate or avoid a significant effect, if a significant effect exists, on a tribal cultural resource; or

**b.** A party, acting in good faith and after reasonable effort, concludes that mutual agreement cannot be reached. (Pub. Resources Code §21080.3.2 (b)).

**8.** Recommending Mitigation Measures Agreed Upon in Consultation in the Environmental Document: Any mitigation measures agreed upon in the consultation conducted pursuant to Public Resources Code §21080.3.2 shall be recommended for inclusion in the environmental document and in an adopted mitigation monitoring and reporting program, if determined to avoid or lessen the impact pursuant to Public Resources Code §21082.3, subdivision (b), paragraph 2, and shall be fully enforceable. (Pub. Resources Code §21082.3 (a)).

**9.** Required Consideration of Feasible Mitigation: If mitigation measures recommended by the staff of the lead agency as a result of the consultation process are not included in the environmental document or if there are no agreed upon mitigation measures at the conclusion of consultation, or if consultation does not occur, and if substantial evidence demonstrates that a project will cause a significant effect to a tribal cultural resource, the lead agency shall consider feasible mitigation pursuant to Public Resources Code §21084.3 (b). (Pub. Resources Code §21082.3 (e)).

**10.** Examples of Mitigation Measures That, If Feasible, May Be Considered to Avoid or Minimize Significant Adverse Impacts to Tribal Cultural Resources:

**a.** Avoidance and preservation of the resources in place, including, but not limited to:

**i.** Planning and construction to avoid the resources and protect the cultural and natural context.

**ii.** Planning greenspace, parks, or other open space, to incorporate the resources with culturally appropriate protection and management criteria.

**b.** Treating the resource with culturally appropriate dignity, taking into account the tribal cultural values and meaning of the resource, including, but not limited to, the following:

**i.** Protecting the cultural character and integrity of the resource.

**ii.** Protecting the traditional use of the resource.

**iii.** Protecting the confidentiality of the resource.

**c.** Permanent conservation easements or other interests in real property, with culturally appropriate management criteria for the purposes of preserving or utilizing the resources or places.

**d.** Protecting the resource. (Pub. Resource Code §21084.3 (b)).

**e.** Please note that a federally recognized California Native American tribe or a non-federally recognized California Native American tribe that is on the contact list maintained by the NAHC to protect a California prehistoric, archaeological, cultural, spiritual, or ceremonial place may acquire and hold conservation easements if the conservation easement is voluntarily conveyed. (Civ. Code §815.3 (c)).

**f.** Please note that it is the policy of the state that Native American remains and associated grave artifacts shall be repatriated. (Pub. Resources Code §5097.991).

**11.** Prerequisites for Certifying an Environmental Impact Report or Adopting a Mitigated Negative Declaration or Negative Declaration with a Significant Impact on an Identified Tribal Cultural Resource: An Environmental Impact Report may not be certified, nor may a mitigated negative declaration or a negative declaration be adopted unless one of the following occurs:

**a.** The consultation process between the tribes and the lead agency has occurred as provided in Public Resources Code §21080.3.1 and §21080.3.2 and concluded pursuant to Public Resources Code §21080.3.2.

**b.** The tribe that requested consultation failed to provide comments to the lead agency or otherwise failed to engage in the consultation process.

**c.** The lead agency provided notice of the project to the tribe in compliance with Public Resources Code §21080.3.1 (d) and the tribe failed to request consultation within 30 days. (Pub. Resources Code §21082.3 (d)).

The NAHC's PowerPoint presentation titled, "Tribal Consultation Under AB 52: Requirements and Best Practices" may be found online at: http://nahc.ca.gov/wp-content/uploads/2015/10/AB52TribalConsultation_CalEPAPDF.pdf

SB 18

SB 18 applies to local governments and requires local governments to contact, provide notice to, refer plans to, and consult with tribes prior to the adoption or amendment of a general plan or a specific plan, or the designation of open space. (Gov. Code §65352.3). Local governments should consult the Governor's Office of Planning and Research's "Tribal Consultation Guidelines," which can be found online at: https://www.opr.ca.gov/docs/09_14_05_Updated_Guidelines_922.pdf.

Some of SB 18's provisions include:

1. Tribal Consultation: If a local government considers a proposal to adopt or amend a general plan or a specific plan, or to designate open space it is required to contact the appropriate tribes identified by the NAHC by requesting a "Tribal Consultation List." If a tribe, once contacted, requests consultation the local government must consult with the tribe on the plan proposal. **A tribe has 90 days from the date of receipt of notification to request consultation unless a shorter timeframe has been agreed to by the tribe.** (Gov. Code §65352.3 (a)(2)).
2. No Statutory Time Limit on SB 18 Tribal Consultation. There is no statutory time limit on SB 18 tribal consultation.
3. Confidentiality: Consistent with the guidelines developed and adopted by the Office of Planning and Research pursuant to Gov. Code §65040.2, the city or county shall protect the confidentiality of the information concerning the specific identity, location, character, and use of places, features and objects described in Public Resources Code §5097.9 and §5097.993 that are within the city's or county's jurisdiction. (Gov. Code §65352.3 (b)).
4. Conclusion of SB 18 Tribal Consultation: Consultation should be concluded at the point in which:
    a. The parties to the consultation come to a mutual agreement concerning the appropriate measures for preservation or mitigation; or
    b. Either the local government or the tribe, acting in good faith and after reasonable effort, concludes that mutual agreement cannot be reached concerning the appropriate measures of preservation or mitigation. (Tribal Consultation Guidelines, Governor's Office of Planning and Research (2005) at p. 18).

Agencies should be aware that neither AB 52 nor SB 18 precludes agencies from initiating tribal consultation with tribes that are traditionally and culturally affiliated with their jurisdictions before the timeframes provided in AB 52 and SB 18. For that reason, we urge you to continue to request Native American Tribal Contact Lists and "Sacred Lands File" searches from the NAHC. The request forms can be found online at: http://nahc.ca.gov/resources/forms/.

NAHC Recommendations for Cultural Resources Assessments

To adequately assess the existence and significance of tribal cultural resources and plan for avoidance, preservation in place, or barring both, mitigation of project-related impacts to tribal cultural resources, the NAHC recommends the following actions:

1. Contact the appropriate regional California Historical Research Information System (CHRIS) Center (https://ohp.parks.ca.gov/?page_id=30331) for an archaeological records search. The records search will determine:
    a. If part or all of the APE has been previously surveyed for cultural resources.
    b. If any known cultural resources have already been recorded on or adjacent to the APE.
    c. If the probability is low, moderate, or high that cultural resources are located in the APE.
    d. If a survey is required to determine whether previously unrecorded cultural resources are present.

2. If an archaeological inventory survey is required, the final stage is the preparation of a professional report detailing the findings and recommendations of the records search and field survey.
    a. The final report containing site forms, site significance, and mitigation measures should be submitted immediately to the planning department. All information regarding site locations, Native American human remains, and associated funerary objects should be in a separate confidential addendum and not be made available for public disclosure.

**b.** The final written report should be submitted within 3 months after work has been completed to the appropriate regional CHRIS center.

**3.** Contact the NAHC for:

**a.** A Sacred Lands File search. Remember that tribes do not always record their sacred sites in the Sacred Lands File, nor are they required to do so. A Sacred Lands File search is not a substitute for consultation with tribes that are traditionally and culturally affiliated with the geographic area of the project's APE.

**b.** A Native American Tribal Consultation List of appropriate tribes for consultation concerning the project site and to assist in planning for avoidance, preservation in place, or, failing both, mitigation measures.

**4.** Remember that the lack of surface evidence of archaeological resources (including tribal cultural resources) does not preclude their subsurface existence.

**a.** Lead agencies should include in their mitigation and monitoring reporting program plan provisions for the identification and evaluation of inadvertently discovered archaeological resources per Cal. Code Regs., tit. 14, §15064.5(f) (CEQA Guidelines §15064.5(f)). In areas of identified archaeological sensitivity, a certified archaeologist and a culturally affiliated Native American with knowledge of cultural resources should monitor all ground-disturbing activities.

**b.** Lead agencies should include in their mitigation and monitoring reporting program plans provisions for the disposition of recovered cultural items that are not burial associated in consultation with culturally affiliated Native Americans.

**c.** Lead agencies should include in their mitigation and monitoring reporting program plans provisions for the treatment and disposition of inadvertently discovered Native American human remains. Health and Safety Code §7050.5, Public Resources Code §5097.98, and Cal. Code Regs., tit. 14, §15064.5, subdivisions (d) and (e) (CEQA Guidelines §15064.5, subds. (d) and (e)) address the processes to be followed in the event of an inadvertent discovery of any Native American human remains and associated grave goods in a location other than a dedicated cemetery.

If you have any questions or need additional information, please contact me at my email address: Andrew.Green@NAHC.ca.gov.

Sincerely,

Andrew Green
Cultural Resources Analyst

cc: State Clearinghouse

Ph: (626) 314-3821
Fx: (626) 389-5414
Em: info@mitchtsailaw.com

**Mitchell M. Tsai**
Law Firm

139 South Hudson Avenue
Suite 200
Pasadena, California 91101

**VIA E-MAIL**

August 12, 2024

Kurth B. Nelson III, Principal Planner
City of Dana Point, Planning Division
33282 Golden Lantern, Suite 209
Dana Point, California 92629
Ph: (949) 248-3572
Em: knelson@danapoint.org

**RE: City of Dana Point Dana Point Harbor Hotels Project Supplemental Notice of Preparation of a Revised Draft Environmental Impact Report (SCH# 2020099024).**

Dear Mr. Nelson,

On behalf of the Western States Regional Council of Carpenters ("Western Carpenters" or "WSRCC"), previously known as the Southwest Regional Council of Carpenters or SWRCC, my Office is submitting these comments for the Supplemental Notice of Preparation of a Revised Draft Environmental Impact Report ("**NOP**") for the Dana Point Harbor Hotels Project ("**Project**").

The Western States Regional Council of Carpenters is a labor union representing almost 90,000 union carpenters in 12 states, including California, and has a strong interest in well-ordered land use planning and in addressing the environmental impacts of development projects.

The proposed Project involves the development of two hotels including, a 130 market-rate room boutique hotel, a 169 affordable-rate hotel, and associated amenities. (NOP, p. 1). The affordable-rate hotel represents an increased in the Project's size based on the discussions associated with the Coastal Commission's approvals.

Individual members of the Western Carpenters live, work, and recreate in the City and surrounding communities and would be directly affected by Project's environmental impacts.

The Western Carpenters expressly reserves the right to supplement these comments at or prior to hearings on the Project, and at any later hearing and proceeding related to this Project. Gov. Code, § 65009, subd. (b); Pub. Res. Code, § 21177, subd. (a); see *Bakersfield Citizens for Local Control v. Bakersfield* (2004) 124 Cal.App.4th 1184, 1199-1203; see also *Galante Vineyards v. Monterey Water Dist.* (1997) 60 Cal.App.4th 1109, 1121.

The Western Carpenters incorporates by reference all comments raising issues regarding the Environmental Impact Report (EIR) submitted prior to certification of the EIR for the Project. See *Citizens for Clean Energy v City of Woodland* (2014) 225 Cal.App.4th 173, 191 (finding that any party who has objected to the project's environmental documentation may assert any issue timely raised by other parties).

Moreover, the Western Carpenters requests that the City provide notice for any and all notices referring or related to the Project issued under the California Environmental Quality Act (**CEQA**) (Pub. Res. Code, § 21000 *et seq.*), and the California Planning and Zoning Law ("**Planning and Zoning Law**") (Gov. Code, §§ 65000–65010). California Public Resources Code Sections 21092.2, and 21167(f) and California Government Code Section 65092 require agencies to mail such notices to any person who has filed a written request for them with the clerk of the agency's governing body.

## I. THE CITY SHOULD REQUIRE THE USE OF A LOCAL WORKFORCE TO BENEFIT THE COMMUNITY'S ECONOMIC DEVELOPMENT AND ENVIRONMENT

The City should require the Project to be built using a local workers who have graduated from a Joint Labor-Management Apprenticeship Program approved by the State of California, have at least as many hours of on-the-job experience in the applicable craft which would be required to graduate from such a state-approved apprenticeship training program, or who are registered apprentices in a state-approved apprenticeship training program.

Community benefits such as local hire can also be helpful to reduce environmental impacts and improve the positive economic impact of the Project. Local hire provisions requiring that a certain percentage of workers reside within 10 miles or less of the Project site can reduce the length of vendor trips, reduce greenhouse gas emissions, and provide localized economic benefits. As environmental consultants Matt Hagemann and Paul E. Rosenfeld note:

> [A]ny local hire requirement that results in a decreased worker trip length from the default value has the potential to result in a reduction of construction-related GHG emissions, though the significance of the reduction would vary based on the location and urbanization level of the project site.

March 8, 2021 SWAPE Letter to Mitchell M. Tsai re Local Hire Requirements and Considerations for Greenhouse Gas Modeling.

Workforce requirements promote the development of skilled trades that yield sustainable economic development. As the California Workforce Development Board and the University of California, Berkeley Center for Labor Research and Education concluded:

> [L]abor should be considered an investment rather than a cost—and investments in growing, diversifying, and upskilling California's workforce can positively affect returns on climate mitigation efforts. In other words, well-trained workers are key to delivering emissions reductions and moving California closer to its climate targets.[1]

Furthermore, workforce policies have significant environmental benefits given that they improve an area's jobs-housing balance, decreasing the amount and length of job commutes and the associated greenhouse gas (GHG) emissions. In fact, on May 7, 2021, the South Coast Air Quality Management District found that that the "[u]se of a local state-certified apprenticeship program" can result in air pollutant reductions.[2]

Locating jobs closer to residential areas can have significant environmental benefits. As the California Planning Roundtable noted in 2008:

> People who live and work in the same jurisdiction would be more likely to take transit, walk, or bicycle to work than residents of less balanced communities and their vehicle trips would be shorter. Benefits would

[1] California Workforce Development Board (2020) Putting California on the High Road: A Jobs and Climate Action Plan for 2030 at p. ii, *available at* https://laborcenter.berkeley.edu/wp-content/uploads/2020/09/Putting-California-on-the-High-Road.pdf.

[2] South Coast Air Quality Management District (May 7, 2021) Certify Final Environmental Assessment and Adopt Proposed Rule 2305 – Warehouse Indirect Source Rule – Warehouse Actions and Investments to Reduce Emissions Program, and Proposed Rule 316 – Fees for Rule 2305, Submit Rule 2305 for Inclusion Into the SIP, and Approve Supporting Budget Actions, *available at* http://www.aqmd.gov/docs/default-source/Agendas/Governing-Board/2021/2021-May7-027.pdf?sfvrsn=10.

> include potential reductions in both vehicle miles traveled and vehicle hours traveled.[3]

Moreover, local hire mandates and skill-training are critical facets of a strategy to reduce vehicle miles traveled (VMT). As planning experts Robert Cervero and Michael Duncan have noted, simply placing jobs near housing stock is insufficient to achieve VMT reductions given that the skill requirements of available local jobs must match those held by local residents.[4] Some municipalities have even tied local hire and other workforce policies to local development permits to address transportation issues. Cervero and Duncan note that:

> In nearly built-out Berkeley, CA, the approach to balancing jobs and housing is to create local jobs rather than to develop new housing. The city's First Source program encourages businesses to hire local residents, especially for entry- and intermediate-level jobs, and sponsors vocational training to ensure residents are employment-ready. While the program is voluntary, some 300 businesses have used it to date, placing more than 3,000 city residents in local jobs since it was launched in 1986. When needed, these carrots are matched by sticks, since the city is not shy about negotiating corporate participation in First Source as a condition of approval for development permits.

Recently, the State of California verified its commitment towards workforce development through the Affordable Housing and High Road Jobs Act of 2022, otherwise known as Assembly Bill No. 2011 ("**AB2011**"). AB2011 amended the Planning and Zoning Law to allow ministerial, by-right approval for projects being built alongside commercial corridors that meet affordability and labor requirements.

The City should consider utilizing local workforce policies and requirements to benefit the local area economically and to mitigate greenhouse gas, improve air quality, and reduce transportation impacts.

## II. THE CITY SHOULD IMPOSE TRAINING REQUIREMENTS FOR THE PROJECT'S CONSTRUCTION ACTIVITIES TO PREVENT

[3] California Planning Roundtable (2008) Deconstructing Jobs-Housing Balance at p. 6, *available at* https://cproundtable.org/static/media/uploads/publications/cpr-jobs-housing.pdf

[4] Cervero, Robert and Duncan, Michael (2006) Which Reduces Vehicle Travel More: Jobs-Housing Balance or Retail-Housing Mixing? Journal of the American Planning Association 72 (4), 475-490, 482, *available at* http://reconnectingamerica.org/assets/Uploads/UTCT-825.pdf.

## COMMUNITY SPREAD OF COVID-19 AND OTHER INFECTIOUS DISEASES

Construction work has been defined as a Lower to High-risk activity for COVID-19 spread by the Occupations Safety and Health Administration. Recently, several construction sites have been identified as sources of community spread of COVID-19.[5]

Western Carpenters recommend that the Lead Agency adopt additional requirements to mitigate public health risks from the Project's construction activities. Western Carpenters requests that the Lead Agency require safe on-site construction work practices as well as training and certification for any construction workers on the Project Site.

In particular, based upon Western Carpenters' experience with safe construction site work practices, Western Carpenters recommends that the Lead Agency require that while construction activities are being conducted at the Project Site:

**Construction Site Design:**

- The Project Site will be limited to two controlled entry points.
- Entry points will have temperature screening technicians taking temperature readings when the entry point is open.
- The Temperature Screening Site Plan shows details regarding access to the Project Site and Project Site logistics for conducting temperature screening.
- A 48-hour advance notice will be provided to all trades prior to the first day of temperature screening.
- The perimeter fence directly adjacent to the entry points will be clearly marked indicating the appropriate 6-foot social distancing position for when you approach the screening area. Please reference the Apex temperature screening site map for additional details.

[5] Santa Clara County Public Health (June 12, 2020) COVID-19 CASES AT CONSTRUCTION SITES HIGHLIGHT NEED FOR CONTINUED VIGILANCE IN SECTORS THAT HAVE REOPENED, *available at* https://www.sccgov.org/sites/covid19/Pages/press-release-06-12-2020-cases-at-construction-sites.aspx.

- There will be clear signage posted at the project site directing you through temperature screening.
- Provide hand washing stations throughout the construction site.

**Testing Procedures:**

- The temperature screening being used are non-contact devices.
- Temperature readings will not be recorded.
- Personnel will be screened upon entering the testing center and should only take 1-2 seconds per individual.
- Hard hats, head coverings, sweat, dirt, sunscreen or any other cosmetics must be removed on the forehead before temperature screening.
- Anyone who refuses to submit to a temperature screening or does not answer the health screening questions will be refused access to the Project Site.
- Screening will be performed at both entrances from 5:30 am to 7:30 am.; main gate [ZONE 1] and personnel gate [ZONE 2]
- After 7:30 am only the main gate entrance [ZONE 1] will continue to be used for temperature testing for anybody gaining entry to the project site such as returning personnel, deliveries, and visitors.
- If the digital thermometer displays a temperature reading above 100.0 degrees Fahrenheit, a second reading will be taken to verify an accurate reading.
- If the second reading confirms an elevated temperature, DHS will instruct the individual that he/she will not be allowed to enter the Project Site. DHS will also instruct the individual to promptly notify his/her supervisor and his/her human resources (HR) representative and provide them with a copy of Annex A.

**Planning**

- Require the development of an Infectious Disease Preparedness and Response Plan that will include basic infection prevention measures (requiring the use of personal protection equipment), policies and procedures for prompt identification and isolation of sick individuals, social distancing (prohibiting gatherings of no more than 10 people including all-hands meetings and all-hands lunches) communication and training and workplace controls that meet standards that may be promulgated by the Center for Disease Control, Occupational Safety and Health Administration, Cal/OSHA, California Department of Public Health or applicable local public health agencies.[6]

The United Brotherhood of Carpenters and Carpenters International Training Fund has developed COVID-19 Training and Certification to ensure that Carpenter union members and apprentices conduct safe work practices. The Agency should require that all construction workers undergo COVID-19 Training and Certification before being allowed to conduct construction activities at the Project Site.

Western Carpenters has also developed a rigorous Infection Control Risk Assessment ("**ICRA**") training program to ensure it delivers a workforce that understands how to identify and control infection risks by implementing protocols to protect themselves and all others during renovation and construction projects in healthcare environments.[7]

ICRA protocols are intended to contain pathogens, control airflow, and protect patients during the construction, maintenance and renovation of healthcare facilities. ICRA protocols prevent cross contamination, minimizing the risk of secondary infections in patients at hospital facilities.

---

[6] *See also* The Center for Construction Research and Training, North America's Building Trades Unions (April 27 2020) NABTU and CPWR COVIC-19 Standards for U.S Constructions Sites, *available at* https://www.cpwr.com/sites/default/files/NABTU_CPWR_Standards_COVID-19.pdf; Los Angeles County Department of Public Works (2020) Guidelines for Construction Sites During COVID-19 Pandemic, *available at* https://dpw.lacounty.gov/building-and-safety/docs/pw_guidelines-construction-sites.pdf.

[7] For details concerning Western Carpenter's ICRA training program, *see* https://icrahealthcare.com/.

The City should require the Project to be built using a workforce trained in ICRA protocols.

## III. THE PROJECT WOULD BE APPROVED IN VIOLATION OF THE CALIFORNIA ENVIRONMENTAL QUALITY ACT

CEQA is a California statute designed to inform decision makers and the public about the potential, significant environmental effects of a project. 14 California Code of Regulations ("**CEQA Guidelines**") § 15002(a)(1).[8] At its core, "[i]ts purpose is to inform the public and its responsible officials of the environmental consequences of their decisions *before* they are made." *Citizens of Goleta Valley v. Board of Supervisors* (1990) 52 Cal. 3d 553, 564.

To achieve this purpose, CEQA mandates preparation of an Environmental Impact Report ("**EIR**") for projects so that the foreseeable impacts of pursuing the project can be understood and weighed. *Communities for a Better Environment v. Richmond* (2010) 184 Cal. App. 4th 70, 80. The EIR requirement "is the heart of CEQA." CEQA Guidelines, § 15003(a).

A strong presumption in favor of requiring preparation of an EIR is built into CEQA. This presumption is reflected in what is known as the "fair argument" standard, under which an agency must prepare an EIR whenever substantial evidence in the record supports a fair argument that a project may have a significant effect on the environment. *Quail Botanical Gardens Found., Inc. v. City of Encinitas* (1994) 29 Cal. App. 4th 1597, 1602; *Friends of "B" St.* v. *City of Hayward* (1980) 106 Cal. 3d 988, 1002.

The fair argument test stems from the statutory mandate that an EIR be prepared for any project that "may have a significant effect on the environment." PRC § 21151; *No Oil, Inc. v. City of Los Angeles* (1974) 13 Cal. App. 3d 68, 75*; Jensen v. City of Santa Rosa* (2018) 23 Cal. App. 5th 877, 884. Under this test, if a proposed project is not exempt and may cause a significant effect on the environment, the lead agency must prepare an EIR. PRC §§ 21100(a), 21151; CEQA Guidelines § 15064(a)(1), (f)(1). An EIR may be dispensed with only if the lead agency finds no substantial evidence in the initial study or elsewhere in the record that the project may have a significant effect on the environment. *Parker Shattuck Neighbors v. Berkeley City Council* (2013) 222 Cal. App. 4th

[8] The CEQA Guidelines, codified in Title 14 of the California Code of Regulations, section 15000 *et seq*, are regulatory guidelines promulgated by the state Natural Resources Agency for the implementation of CEQA. (Cal. Pub. Res. Code § 21083.) The CEQA Guidelines are given "great weight in interpreting CEQA except when . . . clearly unauthorized or erroneous." *Center for Biological Diversity v. Department of Fish & Wildlife* (2015) 62 Cal. 4th 204, 217.

768, 785. In such a situation, the agency must adopt a negative declaration. PRC § 21080(c)(1); CEQA Guidelines §§ 15063(b)(2), 15064(f)(3).

"Significant effect upon the environment" is defined as "a substantial or potentially substantial adverse change in the environment." PRC § 21068; CEQA Guidelines § 15382. A project "may" have a significant effect on the environment if there is a "reasonable probability" that it will result in a significant impact. *No Oil, Inc. v. City of Los Angeles*, 13 Cal. 3d at 83 fn. 16; *Sundstrom v. County of Mendocino* (1988) 202 Cal. App. 3d 296, 309. If any aspect of the project may result in a significant impact on the environment, an EIR must be prepared even if the overall effect of the project is beneficial. CEQA Guidelines § 15063(b)(1). See *County Sanitation Dist. No. 2 v. County of Kern* (2005) 127 Cal. App. 4th 1544, 1580.

This standard sets a "low threshold" for preparation of an EIR. *Consolidated Irrig. Dist. v. City of Selma* (2012) 204 Cal. App. 4th 187, 207; *Nelson v. County of Kern* (2010) 190 Cal. App. 4th 252; *Pocket Protectors v. City of Sacramento* (2004) 124 Cal. App. 4th 903, 928; *Bowman v. City of Berkeley* (2004) 122 Cal. App. 4th 572, 580; *Citizen Action to Serve All Students v. Thornley* (1990) 222 Cal. App. 3d 748, 754; *Sundstrom v. County of Mendocino* (1988) 202 Cal. App. 3d 296, 310. If substantial evidence in the record supports a fair argument that the project may have a significant environmental effect, the lead agency must prepare an EIR even if other substantial evidence before it indicates the project will have no significant effect. See *Jensen v. City of Santa Rosa* (2018) 23 Cal. App. 5th 877, 886; *Clews Land & Livestock v. City of San Diego* (2017) 19 Cal. App. 5th 161, 183; *Stanislaus Audubon Soc'y, Inc. v. County of Stanislaus* (1995) 33 Cal. App. 4th 144, 150; *Brentwood Ass'n for No Drilling, Inc. v. City of Los Angeles* (1982) 134 Cal. App. 3d 491; *Friends of "B" St. v. City of Hayward* (1980) 106 Cal. App. 3d 988; CEQA Guidelines § 15064(f)(1).

A. <u>The Scope of Analysis Needs to be Expanded in the Recirculated Document.</u>

As evaluated in WSRCC's June 21, 2021, DEIR comment letter, the environmental review thus far performed for the Project is inadequate. More specifically, the DEIR improperly relied on earlier analysis performed for the 2006 Dana Point Harbor Revitalization Plan ("DPHRP") Project Final Program Environmental Impact Report ("EIR No. 591"), without demonstrating that the current Project is *consistent* with the development analyzed under EIR No. 591. Simply put, the proposed Project exceeds the size and scope of the project contemplated in EIR No. 591. As such, the Project's

RDEIR must be expanded to consider the new effects of the larger Project. If the previous EIR is to be used again, the RDEIR must establish that the Project is consistent with EIR No. 591.

Also raised in WSRCC's past comment letter was the issue of feasible alternatives to the discharge of pollutants into the harbor, a designated Environmentally Sensitive Area ("**ESA**"). As planned, the Project's stormwater will drain into the harbor, thus likely leading to negative impacts on the ESA. The RDEIR should analyze these potential impacts and consider stormwater management alternatives to minimize the impacts to the ESA.

Further areas of concern that should be discussed in the RDEIR include any proposed changes to the utility infrastructure, further consideration and study of potential flooding risks at the Project site due to sea level rise, and a closer examination of the Project's induced growth impacts. These concerns were not adequately addressed in the previous DEIR document and, as such, the revised document must explore these potential impacts.

## IV. CONCLUSION

The WSRCC requests that the RDEIR provide further analysis of the above-mentioned issues. If the City has any questions, feel free to contact my Office.

Sincerely,

Grace Holbrook
Attorneys for Western States Regional Council of Carpenters

Attached:
March 8, 2021 SWAPE Letter to Mitchell M. Tsai re Local Hire Requirements and Considerations for Greenhouse Gas Modeling (Exhibit A);
Air Quality and GHG Expert Paul Rosenfeld CV (Exhibit B);
Air Quality and GHG Expert Matt Hagemann CV (Exhibit C).

**EXHIBIT A**

SWAPE Technical Consultation, Data Analysis and Litigation Support for the Environment

2656 29th Street, Suite 201
Santa Monica, CA 90405

Matt Hagemann, P.G, C.Hg.
(949) 887-9013
mhagemann@swape.com

Paul E. Rosenfeld, PhD
(310) 795-2335
prosenfeld@swape.com

March 8, 2021

Mitchell M. Tsai
155 South El Molino, Suite 104
Pasadena, CA 91101

**Subject: Local Hire Requirements and Considerations for Greenhouse Gas Modeling**

Dear Mr. Tsai,

Soil Water Air Protection Enterprise ("SWAPE") is pleased to provide the following draft technical report explaining the significance of worker trips required for construction of land use development projects with respect to the estimation of greenhouse gas ("GHG") emissions. The report will also discuss the potential for local hire requirements to reduce the length of worker trips, and consequently, reduced or mitigate the potential GHG impacts.

## Worker Trips and Greenhouse Gas Calculations

The California Emissions Estimator Model ("CalEEMod") is a "statewide land use emissions computer model designed to provide a uniform platform for government agencies, land use planners, and environmental professionals to quantify potential criteria pollutant and greenhouse gas (GHG) emissions associated with both construction and operations from a variety of land use projects."[1] CalEEMod quantifies construction-related emissions associated with land use projects resulting from off-road construction equipment; on-road mobile equipment associated with workers, vendors, and hauling; fugitive dust associated with grading, demolition, truck loading, and on-road vehicles traveling along paved and unpaved roads; and architectural coating activities; and paving.[2]

The number, length, and vehicle class of worker trips are utilized by CalEEMod to calculate emissions associated with the on-road vehicle trips required to transport workers to and from the Project site during construction.[3]

[1] "California Emissions Estimator Model." CAPCOA, 2017, *available at:* http://www.aqmd.gov/caleemod/home.
[2] "California Emissions Estimator Model." CAPCOA, 2017, *available at:* http://www.aqmd.gov/caleemod/home.
[3] "CalEEMod User's Guide." CAPCOA, November 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/01_user-39-s-guide2016-3-2_15november2017.pdf?sfvrsn=4, p. 34.

Specifically, the number and length of vehicle trips is utilized to estimate the vehicle miles travelled ("VMT") associated with construction. Then, utilizing vehicle-class specific EMFAC 2014 emission factors, CalEEMod calculates the vehicle exhaust, evaporative, and dust emissions resulting from construction-related VMT, including personal vehicles for worker commuting.[4]

Specifically, in order to calculate VMT, CalEEMod multiplies the average daily trip rate by the average overall trip length (see excerpt below):

> "$VMT_d = \Sigma(\text{Average Daily Trip Rate}_i * \text{Average Overall Trip Length}_i)_n$
>
> Where:
>
> n = Number of land uses being modeled."[5]

Furthermore, to calculate the on-road emissions associated with worker trips, CalEEMod utilizes the following equation (see excerpt below):

> "$\text{Emissions}_{pollutant} = VMT * EF_{running,pollutant}$
>
> Where:
>
> $\text{Emissions}_{pollutant}$ = emissions from vehicle running for each pollutant
>
> VMT = vehicle miles traveled
>
> $EF_{running,pollutant}$ = emission factor for running emissions."[6]

Thus, there is a direct relationship between trip length and VMT, as well as a direct relationship between VMT and vehicle running emissions. In other words, when the trip length is increased, the VMT and vehicle running emissions increase as a result. Thus, vehicle running emissions can be reduced by decreasing the average overall trip length, by way of a local hire requirement or otherwise.

## Default Worker Trip Parameters and Potential Local Hire Requirements

As previously discussed, the number, length, and vehicle class of worker trips are utilized by CalEEMod to calculate emissions associated with the on-road vehicle trips required to transport workers to and from the Project site during construction.[7] In order to understand how local hire requirements and associated worker trip length reductions impact GHG emissions calculations, it is important to consider the CalEEMod default worker trip parameters. CalEEMod provides recommended default values based on site-specific information, such as land use type, meteorological data, total lot acreage, project type and typical equipment associated with project type. If more specific project information is known, the user can change the default values and input project-specific values, but the California Environmental Quality Act ("CEQA") requires that such changes be justified by substantial evidence.[8] The default number of construction-related worker trips is calculated by multiplying the

[4] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 14-15.
[5] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 23.
[6] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 15.
[7] "CalEEMod User's Guide." CAPCOA, November 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/01_user-39-s-guide2016-3-2_15november2017.pdf?sfvrsn=4, p. 34.
[8] CalEEMod User Guide, *available at:* http://www.caleemod.com/, p. 1, 9.

number of pieces of equipment for all phases by 1.25, with the exception of worker trips required for the building construction and architectural coating phases.[9] Furthermore, the worker trip vehicle class is a 50/25/25 percent mix of light duty autos, light duty truck class 1 and light duty truck class 2, respectively."[10] Finally, the default worker trip length is consistent with the length of the operational home-to-work vehicle trips.[11] The operational home-to-work vehicle trip lengths are:

> "[B]ased on the *location* and *urbanization* selected on the project characteristic screen. These values were *supplied by the air districts or use a default average for the state*. Each district (or county) also assigns trip lengths for urban and rural settings" (emphasis added). [12]

Thus, the default worker trip length is based on the location and urbanization level selected by the User when modeling emissions. The below table shows the CalEEMod default rural and urban worker trip lengths by air basin (see excerpt below and Attachment A).[13]

| Worker Trip Length by Air Basin | | |
|---|---|---|
| **Air Basin** | **Rural (miles)** | **Urban (miles)** |
| Great Basin Valleys | 16.8 | 10.8 |
| Lake County | 16.8 | 10.8 |
| Lake Tahoe | 16.8 | 10.8 |
| Mojave Desert | 16.8 | 10.8 |
| Mountain Counties | 16.8 | 10.8 |
| North Central Coast | 17.1 | 12.3 |
| North Coast | 16.8 | 10.8 |
| Northeast Plateau | 16.8 | 10.8 |
| Sacramento Valley | 16.8 | 10.8 |
| Salton Sea | 14.6 | 11 |
| San Diego | 16.8 | 10.8 |
| San Francisco Bay Area | 10.8 | 10.8 |
| San Joaquin Valley | 16.8 | 10.8 |
| South Central Coast | 16.8 | 10.8 |
| South Coast | 19.8 | 14.7 |
| **Average** | **16.47** | **11.17** |
| **Minimum** | **10.80** | **10.80** |
| **Maximum** | **19.80** | **14.70** |
| **Range** | **9.00** | **3.90** |

[9] "CalEEMod User's Guide." CAPCOA, November 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/01_user-39-s-guide2016-3-2_15november2017.pdf?sfvrsn=4, p. 34.
[10] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 15.
[11] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 14.
[12] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 21.
[13] "Appendix D Default Data Tables." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/05_appendix-d2016-3-2.pdf?sfvrsn=4, p. D-84 – D-86.

As demonstrated above, default rural worker trip lengths for air basins in California vary from 10.8- to 19.8-miles, with an average of 16.47 miles. Furthermore, default urban worker trip lengths vary from 10.8- to 14.7-miles, with an average of 11.17 miles. Thus, while default worker trip lengths vary by location, default urban worker trip lengths tend to be shorter in length. Based on these trends evident in the CalEEMod default worker trip lengths, we can reasonably assume that the efficacy of a local hire requirement is especially dependent upon the urbanization of the project site, as well as the project location.

## Practical Application of a Local Hire Requirement and Associated Impact

To provide an example of the potential impact of a local hire provision on construction-related GHG emissions, we estimated the significance of a local hire provision for the Village South Specific Plan ("Project") located in the City of Claremont ("City"). The Project proposed to construct 1,000 residential units, 100,000-SF of retail space, 45,000-SF of office space, as well as a 50-room hotel, on the 24-acre site. The Project location is classified as Urban and lies within the Los Angeles-South Coast County. As a result, the Project has a default worker trip length of 14.7 miles.[14] In an effort to evaluate the potential for a local hire provision to reduce the Project's construction-related GHG emissions, we prepared an updated model, reducing all worker trip lengths to 10 miles (see Attachment B). Our analysis estimates that if a local hire provision with a 10-mile radius were to be implemented, the GHG emissions associated with Project construction would decrease by approximately 17% (see table below and Attachment C).

| **Local Hire Provision Net Change** | |
|---|---|
| **Without Local Hire Provision** | |
| Total Construction GHG Emissions (MT $CO_2e$) | 3,623 |
| Amortized Construction GHG Emissions (MT $CO_2e$/year) | 120.77 |
| **With Local Hire Provision** | |
| Total Construction GHG Emissions (MT CO2e) | 3,024 |
| Amortized Construction GHG Emissions (MT $CO_2e$/year) | 100.80 |
| ***% Decrease in Construction-related GHG Emissions*** | ***17%*** |

As demonstrated above, by implementing a local hire provision requiring 10 mile worker trip lengths, the Project could reduce potential GHG emissions associated with construction worker trips. More broadly, any local hire requirement that results in a decreased worker trip length from the default value has the potential to result in a reduction of construction-related GHG emissions, though the significance of the reduction would vary based on the location and urbanization level of the project site.

This serves as an example of the potential impacts of local hire requirements on estimated project-level GHG emissions, though it does not indicate that local hire requirements would result in reduced construction-related GHG emission for all projects. As previously described, the significance of a local hire requirement depends on the worker trip length enforced and the default worker trip length for the project's urbanization level and location.

[14] "Appendix D Default Data Tables." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/05_appendix-d2016-3-2.pdf?sfvrsn=4, p. D-85.

## Disclaimer

SWAPE has received limited discovery. Additional information may become available in the future; thus, we retain the right to revise or amend this report when additional information becomes available. Our professional services have been performed using that degree of care and skill ordinarily exercised, under similar circumstances, by reputable environmental consultants practicing in this or similar localities at the time of service. No other warranty, expressed or implied, is made as to the scope of work, work methodologies and protocols, site conditions, analytical testing results, and findings presented. This report reflects efforts which were limited to information that was reasonably accessible at the time of the work, and may contain informational gaps, inconsistencies, or otherwise be incomplete due to the unavailability or uncertainty of information obtained or provided by third parties.

Sincerely,

Matt Hagemann, P.G., C.Hg.

Paul E. Rosenfeld, Ph.D.

| Location Type | Location Name | Rural H-W (miles) | Urban H-W (miles) |
|---|---|---|---|
| Air Basin | Great Basin | 16.8 | 10.8 |
| Air Basin | Lake County | 16.8 | 10.8 |
| Air Basin | Lake Tahoe | 16.8 | 10.8 |
| Air Basin | Mojave Desert | 16.8 | 10.8 |
| Air Basin | Mountain | 16.8 | 10.8 |
| Air Basin | North Central | 17.1 | 12.3 |
| Air Basin | North Coast | 16.8 | 10.8 |
| Air Basin | Northeast | 16.8 | 10.8 |
| Air Basin | Sacramento | 16.8 | 10.8 |
| Air Basin | Salton Sea | 14.6 | 11 |
| Air Basin | San Diego | 16.8 | 10.8 |
| Air Basin | San Francisco | 10.8 | 10.8 |
| Air Basin | San Joaquin | 16.8 | 10.8 |
| Air Basin | South Central | 16.8 | 10.8 |
| Air Basin | South Coast | 19.8 | 14.7 |
| Air District | Amador County | 16.8 | 10.8 |
| Air District | Antelope Valley | 16.8 | 10.8 |
| Air District | Bay Area AQMD | 10.8 | 10.8 |
| Air District | Butte County | 12.54 | 12.54 |
| Air District | Calaveras | 16.8 | 10.8 |
| Air District | Colusa County | 16.8 | 10.8 |
| Air District | El Dorado | 16.8 | 10.8 |
| Air District | Feather River | 16.8 | 10.8 |
| Air District | Glenn County | 16.8 | 10.8 |
| Air District | Great Basin | 16.8 | 10.8 |
| Air District | Imperial County | 10.2 | 7.3 |
| Air District | Kern County | 16.8 | 10.8 |
| Air District | Lake County | 16.8 | 10.8 |
| Air District | Lassen County | 16.8 | 10.8 |
| Air District | Mariposa | 16.8 | 10.8 |
| Air District | Mendocino | 16.8 | 10.8 |
| Air District | Modoc County | 16.8 | 10.8 |
| Air District | Mojave Desert | 16.8 | 10.8 |
| Air District | Monterey Bay | 16.8 | 10.8 |
| Air District | North Coast | 16.8 | 10.8 |
| Air District | Northern Sierra | 16.8 | 10.8 |
| Air District | Northern | 16.8 | 10.8 |
| Air District | Placer County | 16.8 | 10.8 |
| Air District | Sacramento | 15 | 10 |

| | | | |
|---|---|---|---|
| Air District | San Diego | 16.8 | 10.8 |
| Air District | San Joaquin | 16.8 | 10.8 |
| Air District | San Luis Obispo | 13 | 13 |
| Air District | Santa Barbara | 8.3 | 8.3 |
| Air District | Shasta County | 16.8 | 10.8 |
| Air District | Siskiyou County | 16.8 | 10.8 |
| Air District | South Coast | 19.8 | 14.7 |
| Air District | Tehama County | 16.8 | 10.8 |
| Air District | Tuolumne | 16.8 | 10.8 |
| Air District | Ventura County | 16.8 | 10.8 |
| Air District | Yolo/Solano | 15 | 10 |
| County | Alameda | 10.8 | 10.8 |
| County | Alpine | 16.8 | 10.8 |
| County | Amador | 16.8 | 10.8 |
| County | Butte | 12.54 | 12.54 |
| County | Calaveras | 16.8 | 10.8 |
| County | Colusa | 16.8 | 10.8 |
| County | Contra Costa | 10.8 | 10.8 |
| County | Del Norte | 16.8 | 10.8 |
| County | El Dorado-Lake | 16.8 | 10.8 |
| County | El Dorado- | 16.8 | 10.8 |
| County | Fresno | 16.8 | 10.8 |
| County | Glenn | 16.8 | 10.8 |
| County | Humboldt | 16.8 | 10.8 |
| County | Imperial | 10.2 | 7.3 |
| County | Inyo | 16.8 | 10.8 |
| County | Kern-Mojave | 16.8 | 10.8 |
| County | Kern-San | 16.8 | 10.8 |
| County | Kings | 16.8 | 10.8 |
| County | Lake | 16.8 | 10.8 |
| County | Lassen | 16.8 | 10.8 |
| County | Los Angeles- | 16.8 | 10.8 |
| County | Los Angeles- | 19.8 | 14.7 |
| County | Madera | 16.8 | 10.8 |
| County | Marin | 10.8 | 10.8 |
| County | Mariposa | 16.8 | 10.8 |
| County | Mendocino- | 16.8 | 10.8 |
| County | Mendocino- | 16.8 | 10.8 |
| County | Mendocino- | 16.8 | 10.8 |
| County | Mendocino- | 16.8 | 10.8 |
| County | Merced | 16.8 | 10.8 |
| County | Modoc | 16.8 | 10.8 |
| County | Mono | 16.8 | 10.8 |
| County | Monterey | 16.8 | 10.8 |
| County | Napa | 10.8 | 10.8 |

| | | | |
|---|---|---|---|
| County | Nevada | 16.8 | 10.8 |
| County | Orange | 19.8 | 14.7 |
| County | Placer-Lake | 16.8 | 10.8 |
| County | Placer-Mountain | 16.8 | 10.8 |
| County | Placer- | 16.8 | 10.8 |
| County | Plumas | 16.8 | 10.8 |
| County | Riverside- | 16.8 | 10.8 |
| County | Riverside- | 19.8 | 14.7 |
| County | Riverside-Salton | 14.6 | 11 |
| County | Riverside-South | 19.8 | 14.7 |
| County | Sacramento | 15 | 10 |
| County | San Benito | 16.8 | 10.8 |
| County | San Bernardino- | 16.8 | 10.8 |
| County | San Bernardino- | 19.8 | 14.7 |
| County | San Diego | 16.8 | 10.8 |
| County | San Francisco | 10.8 | 10.8 |
| County | San Joaquin | 16.8 | 10.8 |
| County | San Luis Obispo | 13 | 13 |
| County | San Mateo | 10.8 | 10.8 |
| County | Santa Barbara- | 8.3 | 8.3 |
| County | Santa Barbara- | 8.3 | 8.3 |
| County | Santa Clara | 10.8 | 10.8 |
| County | Santa Cruz | 16.8 | 10.8 |
| County | Shasta | 16.8 | 10.8 |
| County | Sierra | 16.8 | 10.8 |
| County | Siskiyou | 16.8 | 10.8 |
| County | Solano- | 15 | 10 |
| County | Solano-San | 16.8 | 10.8 |
| County | Sonoma-North | 16.8 | 10.8 |
| County | Sonoma-San | 10.8 | 10.8 |
| County | Stanislaus | 16.8 | 10.8 |
| County | Sutter | 16.8 | 10.8 |
| County | Tehama | 16.8 | 10.8 |
| County | Trinity | 16.8 | 10.8 |
| County | Tulare | 16.8 | 10.8 |
| County | Tuolumne | 16.8 | 10.8 |
| County | Ventura | 16.8 | 10.8 |
| County | Yolo | 15 | 10 |
| County | Yuba | 16.8 | 10.8 |
| Statewide | Statewide | 16.8 | 10.8 |

| Worker Trip Length by Air Basin | | |
|---|---|---|
| **Air Basin** | **Rural (miles)** | **Urban (miles)** |
| Great Basin Valleys | 16.8 | 10.8 |
| Lake County | 16.8 | 10.8 |
| Lake Tahoe | 16.8 | 10.8 |
| Mojave Desert | 16.8 | 10.8 |
| Mountain Counties | 16.8 | 10.8 |
| North Central Coast | 17.1 | 12.3 |
| North Coast | 16.8 | 10.8 |
| Northeast Plateau | 16.8 | 10.8 |
| Sacramento Valley | 16.8 | 10.8 |
| Salton Sea | 14.6 | 11 |
| San Diego | 16.8 | 10.8 |
| San Francisco Bay Area | 10.8 | 10.8 |
| San Joaquin Valley | 16.8 | 10.8 |
| South Central Coast | 16.8 | 10.8 |
| South Coast | 19.8 | 14.7 |
| **Average** | **16.47** | **11.17** |
| **Mininum** | **10.80** | **10.80** |
| **Maximum** | **19.80** | **14.70** |
| **Range** | **9.00** | **3.90** |

# Village South Specific Plan (Proposed)

**Los Angeles-South Coast County, Annual**

## 1.0 Project Characteristics

### 1.1 Land Usage

| Land Uses | Size | Metric | Lot Acreage | Floor Surface Area | Population |
|---|---|---|---|---|---|
| General Office Building | 45.00 | 1000sqft | 1.03 | 45,000.00 | 0 |
| High Turnover (Sit Down Restaurant) | 36.00 | 1000sqft | 0.83 | 36,000.00 | 0 |
| Hotel | 50.00 | Room | 1.67 | 72,600.00 | 0 |
| Quality Restaurant | 8.00 | 1000sqft | 0.18 | 8,000.00 | 0 |
| Apartments Low Rise | 25.00 | Dwelling Unit | 1.56 | 25,000.00 | 72 |
| Apartments Mid Rise | 975.00 | Dwelling Unit | 25.66 | 975,000.00 | 2789 |
| Regional Shopping Center | 56.00 | 1000sqft | 1.29 | 56,000.00 | 0 |

### 1.2 Other Project Characteristics

| | | | | | |
|---|---|---|---|---|---|
| **Urbanization** | Urban | **Wind Speed (m/s)** | 2.2 | **Precipitation Freq (Days)** | 33 |
| **Climate Zone** | 9 | | | **Operational Year** | 2028 |
| **Utility Company** | Southern California Edison | | | | |
| **CO2 Intensity (lb/MWhr)** | 702.44 | **CH4 Intensity (lb/MWhr)** | 0.029 | **N2O Intensity (lb/MWhr)** | 0.006 |

### 1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

| Table Name | Column Name | Default Value | New Value |
|---|---|---|---|
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | NumberWood | 1.25 | 0.00 |
| tblFireplaces | NumberWood | 48.75 | 0.00 |
| tblVehicleTrips | ST_TR | 7.16 | 6.17 |
| tblVehicleTrips | ST_TR | 6.39 | 3.87 |
| tblVehicleTrips | ST_TR | 2.46 | 1.39 |
| tblVehicleTrips | ST_TR | 158.37 | 79.82 |
| tblVehicleTrips | ST_TR | 8.19 | 3.75 |
| tblVehicleTrips | ST_TR | 94.36 | 63.99 |
| tblVehicleTrips | ST_TR | 49.97 | 10.74 |
| tblVehicleTrips | SU_TR | 6.07 | 6.16 |
| tblVehicleTrips | SU_TR | 5.86 | 4.18 |
| tblVehicleTrips | SU_TR | 1.05 | 0.69 |
| tblVehicleTrips | SU_TR | 131.84 | 78.27 |

| | | | |
|---|---|---|---|
| tblVehicleTrips | SU_TR | 5.95 | 3.20 |
| tblVehicleTrips | SU_TR | 72.16 | 57.65 |
| tblVehicleTrips | SU_TR | 25.24 | 6.39 |
| tblVehicleTrips | WD_TR | 6.59 | 5.83 |
| tblVehicleTrips | WD_TR | 6.65 | 4.13 |
| tblVehicleTrips | WD_TR | 11.03 | 6.41 |
| tblVehicleTrips | WD_TR | 127.15 | 65.80 |
| tblVehicleTrips | WD_TR | 8.17 | 3.84 |
| tblVehicleTrips | WD_TR | 89.95 | 62.64 |
| tblVehicleTrips | WD_TR | 42.70 | 9.43 |
| tblWoodstoves | NumberCatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberCatalytic | 48.75 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 48.75 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |

## 2.0 Emissions Summary

## 2.1 Overall Construction

### Unmitigated Construction

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | tons/yr | | | | | | | | | | MT/yr | | | | | |
| 2021 | 0.1713 | 1.8242 | 1.1662 | 2.4000e-003 | 0.4169 | 0.0817 | 0.4986 | 0.1795 | 0.0754 | 0.2549 | 0.0000 | 213.1969 | 213.1969 | 0.0601 | 0.0000 | 214.6993 |
| 2022 | 0.6904 | 4.1142 | 6.1625 | 0.0189 | 1.3058 | 0.1201 | 1.4259 | 0.3460 | 0.1128 | 0.4588 | 0.0000 | 1,721.6826 | 1,721.6826 | 0.1294 | 0.0000 | 1,724.9187 |
| 2023 | 0.6148 | 3.3649 | 5.6747 | 0.0178 | 1.1963 | 0.0996 | 1.2959 | 0.3203 | 0.0935 | 0.4138 | 0.0000 | 1,627.5295 | 1,627.5295 | 0.1185 | 0.0000 | 1,630.4925 |
| 2024 | 4.1619 | 0.1335 | 0.2810 | 5.9000e-004 | 0.0325 | 6.4700e-003 | 0.0390 | 8.6300e-003 | 6.0400e-003 | 0.0147 | 0.0000 | 52.9078 | 52.9078 | 8.0200e-003 | 0.0000 | 53.1082 |
| **Maximum** | **4.1619** | **4.1142** | **6.1625** | **0.0189** | **1.3058** | **0.1201** | **1.4259** | **0.3460** | **0.1128** | **0.4588** | **0.0000** | **1,721.6826** | **1,721.6826** | **0.1294** | **0.0000** | **1,724.9187** |

## 2.1 Overall Construction

### Mitigated Construction

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | tons/yr | | | | | | | | | | MT/yr | | | | | |
| 2021 | 0.1713 | 1.8242 | 1.1662 | 2.4000e-003 | 0.4169 | 0.0817 | 0.4986 | 0.1795 | 0.0754 | 0.2549 | 0.0000 | 213.1967 | 213.1967 | 0.0601 | 0.0000 | 214.6991 |
| 2022 | 0.6904 | 4.1142 | 6.1625 | 0.0189 | 1.3058 | 0.1201 | 1.4259 | 0.3460 | 0.1128 | 0.4588 | 0.0000 | 1,721.6823 | 1,721.6823 | 0.1294 | 0.0000 | 1,724.9183 |
| 2023 | 0.6148 | 3.3648 | 5.6747 | 0.0178 | 1.1963 | 0.0996 | 1.2959 | 0.3203 | 0.0935 | 0.4138 | 0.0000 | 1,627.5291 | 1,627.5291 | 0.1185 | 0.0000 | 1,630.4921 |
| 2024 | 4.1619 | 0.1335 | 0.2810 | 5.9000e-004 | 0.0325 | 6.4700e-003 | 0.0390 | 8.6300e-003 | 6.0400e-003 | 0.0147 | 0.0000 | 52.9077 | 52.9077 | 8.0200e-003 | 0.0000 | 53.1082 |
| **Maximum** | **4.1619** | **4.1142** | **6.1625** | **0.0189** | **1.3058** | **0.1201** | **1.4259** | **0.3460** | **0.1128** | **0.4588** | **0.0000** | **1,721.6823** | **1,721.6823** | **0.1294** | **0.0000** | **1,724.9183** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Percent Reduction** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** |

| Quarter | Start Date | End Date | Maximum Unmitigated ROG + NOX (tons/quarter) | Maximum Mitigated ROG + NOX (tons/quarter) |
|---|---|---|---|---|
| 1 | 9-1-2021 | 11-30-2021 | 1.4103 | 1.4103 |
| 2 | 12-1-2021 | 2-28-2022 | 1.3613 | 1.3613 |
| 3 | 3-1-2022 | 5-31-2022 | 1.1985 | 1.1985 |
| 4 | 6-1-2022 | 8-31-2022 | 1.1921 | 1.1921 |
| 5 | 9-1-2022 | 11-30-2022 | 1.1918 | 1.1918 |
| 6 | 12-1-2022 | 2-28-2023 | 1.0774 | 1.0774 |
| 7 | 3-1-2023 | 5-31-2023 | 1.0320 | 1.0320 |
| 8 | 6-1-2023 | 8-31-2023 | 1.0260 | 1.0260 |

| | | | | |
|---|---|---|---|---|
| **9** | **9-1-2023** | **11-30-2023** | 1.0265 | 1.0265 |
| **10** | **12-1-2023** | **2-29-2024** | 2.8857 | 2.8857 |
| **11** | **3-1-2024** | **5-31-2024** | 1.6207 | 1.6207 |
| | | **Highest** | 2.8857 | 2.8857 |

## 2.2 Overall Operational

### Unmitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Area | 5.1437 | 0.2950 | 10.3804 | 1.6700e-003 | | 0.0714 | 0.0714 | | 0.0714 | 0.0714 | 0.0000 | 220.9670 | 220.9670 | 0.0201 | 3.7400e-003 | 222.5835 |
| Energy | 0.1398 | 1.2312 | 0.7770 | 7.6200e-003 | | 0.0966 | 0.0966 | | 0.0966 | 0.0966 | 0.0000 | 3,896.0732 | 3,896.0732 | 0.1303 | 0.0468 | 3,913.2833 |
| Mobile | 1.5857 | 7.9962 | 19.1834 | 0.0821 | 7.7979 | 0.0580 | 7.8559 | 2.0895 | 0.0539 | 2.1434 | 0.0000 | 7,620.4986 | 7,620.4986 | 0.3407 | 0.0000 | 7,629.0162 |
| Waste | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 207.8079 | 0.0000 | 207.8079 | 12.2811 | 0.0000 | 514.8354 |
| Water | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 29.1632 | 556.6420 | 585.8052 | 3.0183 | 0.0755 | 683.7567 |
| **Total** | **6.8692** | **9.5223** | **30.3407** | **0.0914** | **7.7979** | **0.2260** | **8.0240** | **2.0895** | **0.2219** | **2.3114** | **236.9712** | **12,294.1807** | **12,531.1519** | **15.7904** | **0.1260** | **12,963.4751** |

## 2.2 Overall Operational

**Mitigated Operational**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Area | 5.1437 | 0.2950 | 10.3804 | 1.6700e-003 | | 0.0714 | 0.0714 | | 0.0714 | 0.0714 | 0.0000 | 220.9670 | 220.9670 | 0.0201 | 3.7400e-003 | 222.5835 |
| Energy | 0.1398 | 1.2312 | 0.7770 | 7.6200e-003 | | 0.0966 | 0.0966 | | 0.0966 | 0.0966 | 0.0000 | 3,896.0732 | 3,896.0732 | 0.1303 | 0.0468 | 3,913.2833 |
| Mobile | 1.5857 | 7.9962 | 19.1834 | 0.0821 | 7.7979 | 0.0580 | 7.8559 | 2.0895 | 0.0539 | 2.1434 | 0.0000 | 7,620.4986 | 7,620.4986 | 0.3407 | 0.0000 | 7,629.0162 |
| Waste | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 207.8079 | 0.0000 | 207.8079 | 12.2811 | 0.0000 | 514.8354 |
| Water | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 29.1632 | 556.6420 | 585.8052 | 3.0183 | 0.0755 | 683.7567 |
| **Total** | **6.8692** | **9.5223** | **30.3407** | **0.0914** | **7.7979** | **0.2260** | **8.0240** | **2.0895** | **0.2219** | **2.3114** | **236.9712** | **12,294.1807** | **12,531.1519** | **15.7904** | **0.1260** | **12,963.4751** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Percent Reduction** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** |

## 3.0 Construction Detail

**Construction Phase**

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

| Phase Number | Phase Name | Phase Type | Start Date | End Date | Num Days Week | Num Days | Phase Description |
|---|---|---|---|---|---|---|---|
| 1 | Demolition | Demolition | 9/1/2021 | 10/12/2021 | 5 | 30 | |
| 2 | Site Preparation | Site Preparation | 10/13/2021 | 11/9/2021 | 5 | 20 | |
| 3 | Grading | Grading | 11/10/2021 | 1/11/2022 | 5 | 45 | |
| 4 | Building Construction | Building Construction | 1/12/2022 | 12/12/2023 | 5 | 500 | |
| 5 | Paving | Paving | 12/13/2023 | 1/30/2024 | 5 | 35 | |
| 6 | Architectural Coating | Architectural Coating | 1/31/2024 | 3/19/2024 | 5 | 35 | |

**Acres of Grading (Site Preparation Phase): 0**

**Acres of Grading (Grading Phase): 112.5**

**Acres of Paving: 0**

**Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)**

**OffRoad Equipment**

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

| Phase Name | Offroad Equipment Type | Amount | Usage Hours | Horse Power | Load Factor |
|---|---|---|---|---|---|
| Demolition | Concrete/Industrial Saws | 1 | 8.00 | 81 | 0.73 |
| Demolition | Excavators | 3 | 8.00 | 158 | 0.38 |
| Demolition | Rubber Tired Dozers | 2 | 8.00 | 247 | 0.40 |
| Site Preparation | Rubber Tired Dozers | 3 | 8.00 | 247 | 0.40 |
| Site Preparation | Tractors/Loaders/Backhoes | 4 | 8.00 | 97 | 0.37 |
| Grading | Excavators | 2 | 8.00 | 158 | 0.38 |
| Grading | Graders | 1 | 8.00 | 187 | 0.41 |
| Grading | Rubber Tired Dozers | 1 | 8.00 | 247 | 0.40 |
| Grading | Scrapers | 2 | 8.00 | 367 | 0.48 |
| Grading | Tractors/Loaders/Backhoes | 2 | 8.00 | 97 | 0.37 |
| Building Construction | Cranes | 1 | 7.00 | 231 | 0.29 |
| Building Construction | Forklifts | 3 | 8.00 | 89 | 0.20 |
| Building Construction | Generator Sets | 1 | 8.00 | 84 | 0.74 |
| Building Construction | Tractors/Loaders/Backhoes | 3 | 7.00 | 97 | 0.37 |
| Building Construction | Welders | 1 | 8.00 | 46 | 0.45 |
| Paving | Pavers | 2 | 8.00 | 130 | 0.42 |
| Paving | Paving Equipment | 2 | 8.00 | 132 | 0.36 |
| Paving | Rollers | 2 | 8.00 | 80 | 0.38 |
| Architectural Coating | Air Compressors | 1 | 6.00 | 78 | 0.48 |

**Trips and VMT**

| Phase Name | Offroad Equipment Count | Worker Trip Number | Vendor Trip Number | Hauling Trip Number | Worker Trip Length | Vendor Trip Length | Hauling Trip Length | Worker Vehicle Class | Vendor Vehicle Class | Hauling Vehicle Class |
|---|---|---|---|---|---|---|---|---|---|---|
| Demolition | 6 | 15.00 | 0.00 | 458.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Site Preparation | 7 | 18.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Grading | 8 | 20.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Building Construction | 9 | 801.00 | 143.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Paving | 6 | 15.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Architectural Coating | 1 | 160.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |

## 3.1 Mitigation Measures Construction

## 3.2 Demolition - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.0496 | 0.0000 | 0.0496 | 7.5100e-003 | 0.0000 | 7.5100e-003 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0475 | 0.4716 | 0.3235 | 5.8000e-004 | | 0.0233 | 0.0233 | | 0.0216 | 0.0216 | 0.0000 | 51.0012 | 51.0012 | 0.0144 | 0.0000 | 51.3601 |
| **Total** | **0.0475** | **0.4716** | **0.3235** | **5.8000e-004** | **0.0496** | **0.0233** | **0.0729** | **7.5100e-003** | **0.0216** | **0.0291** | **0.0000** | **51.0012** | **51.0012** | **0.0144** | **0.0000** | **51.3601** |

## 3.2 Demolition - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 1.9300e-003 | 0.0634 | 0.0148 | 1.8000e-004 | 3.9400e-003 | 1.9000e-004 | 4.1300e-003 | 1.0800e-003 | 1.8000e-004 | 1.2600e-003 | 0.0000 | 17.4566 | 17.4566 | 1.2100e-003 | 0.0000 | 17.4869 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 9.7000e-004 | 7.5000e-004 | 8.5100e-003 | 2.0000e-005 | 2.4700e-003 | 2.0000e-005 | 2.4900e-003 | 6.5000e-004 | 2.0000e-005 | 6.7000e-004 | 0.0000 | 2.2251 | 2.2251 | 7.0000e-005 | 0.0000 | 2.2267 |
| **Total** | **2.9000e-003** | **0.0641** | **0.0233** | **2.0000e-004** | **6.4100e-003** | **2.1000e-004** | **6.6200e-003** | **1.7300e-003** | **2.0000e-004** | **1.9300e-003** | **0.0000** | **19.6816** | **19.6816** | **1.2800e-003** | **0.0000** | **19.7136** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.0496 | 0.0000 | 0.0496 | 7.5100e-003 | 0.0000 | 7.5100e-003 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0475 | 0.4716 | 0.3235 | 5.8000e-004 | | 0.0233 | 0.0233 | | 0.0216 | 0.0216 | 0.0000 | 51.0011 | 51.0011 | 0.0144 | 0.0000 | 51.3600 |
| **Total** | **0.0475** | **0.4716** | **0.3235** | **5.8000e-004** | **0.0496** | **0.0233** | **0.0729** | **7.5100e-003** | **0.0216** | **0.0291** | **0.0000** | **51.0011** | **51.0011** | **0.0144** | **0.0000** | **51.3600** |

## 3.2 Demolition - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 1.9300e-003 | 0.0634 | 0.0148 | 1.8000e-004 | 3.9400e-003 | 1.9000e-004 | 4.1300e-003 | 1.0800e-003 | 1.8000e-004 | 1.2600e-003 | 0.0000 | 17.4566 | 17.4566 | 1.2100e-003 | 0.0000 | 17.4869 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 9.7000e-004 | 7.5000e-004 | 8.5100e-003 | 2.0000e-005 | 2.4700e-003 | 2.0000e-005 | 2.4900e-003 | 6.5000e-004 | 2.0000e-005 | 6.7000e-004 | 0.0000 | 2.2251 | 2.2251 | 7.0000e-005 | 0.0000 | 2.2267 |
| **Total** | **2.9000e-003** | **0.0641** | **0.0233** | **2.0000e-004** | **6.4100e-003** | **2.1000e-004** | **6.6200e-003** | **1.7300e-003** | **2.0000e-004** | **1.9300e-003** | **0.0000** | **19.6816** | **19.6816** | **1.2800e-003** | **0.0000** | **19.7136** |

## 3.3 Site Preparation - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.1807 | 0.0000 | 0.1807 | 0.0993 | 0.0000 | 0.0993 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0389 | 0.4050 | 0.2115 | 3.8000e-004 | | 0.0204 | 0.0204 | | 0.0188 | 0.0188 | 0.0000 | 33.4357 | 33.4357 | 0.0108 | 0.0000 | 33.7061 |
| **Total** | **0.0389** | **0.4050** | **0.2115** | **3.8000e-004** | **0.1807** | **0.0204** | **0.2011** | **0.0993** | **0.0188** | **0.1181** | **0.0000** | **33.4357** | **33.4357** | **0.0108** | **0.0000** | **33.7061** |

## 3.3 Site Preparation - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 7.7000e-004 | 6.0000e-004 | 6.8100e-003 | 2.0000e-005 | 1.9700e-003 | 2.0000e-005 | 1.9900e-003 | 5.2000e-004 | 1.0000e-005 | 5.4000e-004 | 0.0000 | 1.7801 | 1.7801 | 5.0000e-005 | 0.0000 | 1.7814 |
| **Total** | **7.7000e-004** | **6.0000e-004** | **6.8100e-003** | **2.0000e-005** | **1.9700e-003** | **2.0000e-005** | **1.9900e-003** | **5.2000e-004** | **1.0000e-005** | **5.4000e-004** | **0.0000** | **1.7801** | **1.7801** | **5.0000e-005** | **0.0000** | **1.7814** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.1807 | 0.0000 | 0.1807 | 0.0993 | 0.0000 | 0.0993 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0389 | 0.4050 | 0.2115 | 3.8000e-004 | | 0.0204 | 0.0204 | | 0.0188 | 0.0188 | 0.0000 | 33.4357 | 33.4357 | 0.0108 | 0.0000 | 33.7060 |
| **Total** | **0.0389** | **0.4050** | **0.2115** | **3.8000e-004** | **0.1807** | **0.0204** | **0.2011** | **0.0993** | **0.0188** | **0.1181** | **0.0000** | **33.4357** | **33.4357** | **0.0108** | **0.0000** | **33.7060** |

## 3.3 Site Preparation - 2021

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 7.7000e-004 | 6.0000e-004 | 6.8100e-003 | 2.0000e-005 | 1.9700e-003 | 2.0000e-005 | 1.9900e-003 | 5.2000e-004 | 1.0000e-005 | 5.4000e-004 | 0.0000 | 1.7801 | 1.7801 | 5.0000e-005 | 0.0000 | 1.7814 |
| **Total** | **7.7000e-004** | **6.0000e-004** | **6.8100e-003** | **2.0000e-005** | **1.9700e-003** | **2.0000e-005** | **1.9900e-003** | **5.2000e-004** | **1.0000e-005** | **5.4000e-004** | **0.0000** | **1.7801** | **1.7801** | **5.0000e-005** | **0.0000** | **1.7814** |

## 3.4 Grading - 2021

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.1741 | 0.0000 | 0.1741 | 0.0693 | 0.0000 | 0.0693 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0796 | 0.8816 | 0.5867 | 1.1800e-003 | | 0.0377 | 0.0377 | | 0.0347 | 0.0347 | 0.0000 | 103.5405 | 103.5405 | 0.0335 | 0.0000 | 104.3776 |
| **Total** | **0.0796** | **0.8816** | **0.5867** | **1.1800e-003** | **0.1741** | **0.0377** | **0.2118** | **0.0693** | **0.0347** | **0.1040** | **0.0000** | **103.5405** | **103.5405** | **0.0335** | **0.0000** | **104.3776** |

## 3.4 Grading - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 1.6400e-003 | 1.2700e-003 | 0.0144 | 4.0000e-005 | 4.1600e-003 | 3.0000e-005 | 4.2000e-003 | 1.1100e-003 | 3.0000e-005 | 1.1400e-003 | 0.0000 | 3.7579 | 3.7579 | 1.1000e-004 | 0.0000 | 3.7607 |
| **Total** | **1.6400e-003** | **1.2700e-003** | **0.0144** | **4.0000e-005** | **4.1600e-003** | **3.0000e-005** | **4.2000e-003** | **1.1100e-003** | **3.0000e-005** | **1.1400e-003** | **0.0000** | **3.7579** | **3.7579** | **1.1000e-004** | **0.0000** | **3.7607** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.1741 | 0.0000 | 0.1741 | 0.0693 | 0.0000 | 0.0693 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0796 | 0.8816 | 0.5867 | 1.1800e-003 | | 0.0377 | 0.0377 | | 0.0347 | 0.0347 | 0.0000 | 103.5403 | 103.5403 | 0.0335 | 0.0000 | 104.3775 |
| **Total** | **0.0796** | **0.8816** | **0.5867** | **1.1800e-003** | **0.1741** | **0.0377** | **0.2118** | **0.0693** | **0.0347** | **0.1040** | **0.0000** | **103.5403** | **103.5403** | **0.0335** | **0.0000** | **104.3775** |

## 3.4 Grading - 2021

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 1.6400e-003 | 1.2700e-003 | 0.0144 | 4.0000e-005 | 4.1600e-003 | 3.0000e-005 | 4.2000e-003 | 1.1100e-003 | 3.0000e-005 | 1.1400e-003 | 0.0000 | 3.7579 | 3.7579 | 1.1000e-004 | 0.0000 | 3.7607 |
| **Total** | **1.6400e-003** | **1.2700e-003** | **0.0144** | **4.0000e-005** | **4.1600e-003** | **3.0000e-005** | **4.2000e-003** | **1.1100e-003** | **3.0000e-005** | **1.1400e-003** | **0.0000** | **3.7579** | **3.7579** | **1.1000e-004** | **0.0000** | **3.7607** |

## 3.4 Grading - 2022

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.0807 | 0.0000 | 0.0807 | 0.0180 | 0.0000 | 0.0180 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0127 | 0.1360 | 0.1017 | 2.2000e-004 | | 5.7200e-003 | 5.7200e-003 | | 5.2600e-003 | 5.2600e-003 | 0.0000 | 19.0871 | 19.0871 | 6.1700e-003 | 0.0000 | 19.2414 |
| **Total** | **0.0127** | **0.1360** | **0.1017** | **2.2000e-004** | **0.0807** | **5.7200e-003** | **0.0865** | **0.0180** | **5.2600e-003** | **0.0233** | **0.0000** | **19.0871** | **19.0871** | **6.1700e-003** | **0.0000** | **19.2414** |

## 3.4 Grading - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 2.8000e-004 | 2.1000e-004 | 2.4400e-003 | 1.0000e-005 | 7.7000e-004 | 1.0000e-005 | 7.7000e-004 | 2.0000e-004 | 1.0000e-005 | 2.1000e-004 | 0.0000 | 0.6679 | 0.6679 | 2.0000e-005 | 0.0000 | 0.6684 |
| **Total** | **2.8000e-004** | **2.1000e-004** | **2.4400e-003** | **1.0000e-005** | **7.7000e-004** | **1.0000e-005** | **7.7000e-004** | **2.0000e-004** | **1.0000e-005** | **2.1000e-004** | **0.0000** | **0.6679** | **0.6679** | **2.0000e-005** | **0.0000** | **0.6684** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.0807 | 0.0000 | 0.0807 | 0.0180 | 0.0000 | 0.0180 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0127 | 0.1360 | 0.1017 | 2.2000e-004 | | 5.7200e-003 | 5.7200e-003 | | 5.2600e-003 | 5.2600e-003 | 0.0000 | 19.0871 | 19.0871 | 6.1700e-003 | 0.0000 | 19.2414 |
| **Total** | **0.0127** | **0.1360** | **0.1017** | **2.2000e-004** | **0.0807** | **5.7200e-003** | **0.0865** | **0.0180** | **5.2600e-003** | **0.0233** | **0.0000** | **19.0871** | **19.0871** | **6.1700e-003** | **0.0000** | **19.2414** |

## 3.4 Grading - 2022

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 2.8000e-004 | 2.1000e-004 | 2.4400e-003 | 1.0000e-005 | 7.7000e-004 | 1.0000e-005 | 7.7000e-004 | 2.0000e-004 | 1.0000e-005 | 2.1000e-004 | 0.0000 | 0.6679 | 0.6679 | 2.0000e-005 | 0.0000 | 0.6684 |
| **Total** | **2.8000e-004** | **2.1000e-004** | **2.4400e-003** | **1.0000e-005** | **7.7000e-004** | **1.0000e-005** | **7.7000e-004** | **2.0000e-004** | **1.0000e-005** | **2.1000e-004** | **0.0000** | **0.6679** | **0.6679** | **2.0000e-005** | **0.0000** | **0.6684** |

## 3.5 Building Construction - 2022

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.2158 | 1.9754 | 2.0700 | 3.4100e-003 | | 0.1023 | 0.1023 | | 0.0963 | 0.0963 | 0.0000 | 293.1324 | 293.1324 | 0.0702 | 0.0000 | 294.8881 |
| **Total** | **0.2158** | **1.9754** | **2.0700** | **3.4100e-003** | | **0.1023** | **0.1023** | | **0.0963** | **0.0963** | **0.0000** | **293.1324** | **293.1324** | **0.0702** | **0.0000** | **294.8881** |

## 3.5 Building Construction - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0527 | 1.6961 | 0.4580 | 4.5500e-003 | 0.1140 | 3.1800e-003 | 0.1171 | 0.0329 | 3.0400e-003 | 0.0359 | 0.0000 | 441.9835 | 441.9835 | 0.0264 | 0.0000 | 442.6435 |
| Worker | 0.4088 | 0.3066 | 3.5305 | 0.0107 | 1.1103 | 8.8700e-003 | 1.1192 | 0.2949 | 8.1700e-003 | 0.3031 | 0.0000 | 966.8117 | 966.8117 | 0.0266 | 0.0000 | 967.4773 |
| **Total** | **0.4616** | **2.0027** | **3.9885** | **0.0152** | **1.2243** | **0.0121** | **1.2363** | **0.3278** | **0.0112** | **0.3390** | **0.0000** | **1,408.7952** | **1,408.7952** | **0.0530** | **0.0000** | **1,410.1208** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.2158 | 1.9754 | 2.0700 | 3.4100e-003 | | 0.1023 | 0.1023 | | 0.0963 | 0.0963 | 0.0000 | 293.1321 | 293.1321 | 0.0702 | 0.0000 | 294.8877 |
| **Total** | **0.2158** | **1.9754** | **2.0700** | **3.4100e-003** | | **0.1023** | **0.1023** | | **0.0963** | **0.0963** | **0.0000** | **293.1321** | **293.1321** | **0.0702** | **0.0000** | **294.8877** |

## 3.5 Building Construction - 2022

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0527 | 1.6961 | 0.4580 | 4.5500e-003 | 0.1140 | 3.1800e-003 | 0.1171 | 0.0329 | 3.0400e-003 | 0.0359 | 0.0000 | 441.9835 | 441.9835 | 0.0264 | 0.0000 | 442.6435 |
| Worker | 0.4088 | 0.3066 | 3.5305 | 0.0107 | 1.1103 | 8.8700e-003 | 1.1192 | 0.2949 | 8.1700e-003 | 0.3031 | 0.0000 | 966.8117 | 966.8117 | 0.0266 | 0.0000 | 967.4773 |
| **Total** | **0.4616** | **2.0027** | **3.9885** | **0.0152** | **1.2243** | **0.0121** | **1.2363** | **0.3278** | **0.0112** | **0.3390** | **0.0000** | **1,408.7952** | **1,408.7952** | **0.0530** | **0.0000** | **1,410.1208** |

## 3.5 Building Construction - 2023

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.1942 | 1.7765 | 2.0061 | 3.3300e-003 | | 0.0864 | 0.0864 | | 0.0813 | 0.0813 | 0.0000 | 286.2789 | 286.2789 | 0.0681 | 0.0000 | 287.9814 |
| **Total** | **0.1942** | **1.7765** | **2.0061** | **3.3300e-003** | | **0.0864** | **0.0864** | | **0.0813** | **0.0813** | **0.0000** | **286.2789** | **286.2789** | **0.0681** | **0.0000** | **287.9814** |

## 3.5 Building Construction - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0382 | 1.2511 | 0.4011 | 4.3000e-003 | 0.1113 | 1.4600e-003 | 0.1127 | 0.0321 | 1.4000e-003 | 0.0335 | 0.0000 | 417.9930 | 417.9930 | 0.0228 | 0.0000 | 418.5624 |
| Worker | 0.3753 | 0.2708 | 3.1696 | 0.0101 | 1.0840 | 8.4100e-003 | 1.0924 | 0.2879 | 7.7400e-003 | 0.2957 | 0.0000 | 909.3439 | 909.3439 | 0.0234 | 0.0000 | 909.9291 |
| **Total** | **0.4135** | **1.5218** | **3.5707** | **0.0144** | **1.1953** | **9.8700e-003** | **1.2051** | **0.3200** | **9.1400e-003** | **0.3292** | **0.0000** | **1,327.3369** | **1,327.3369** | **0.0462** | **0.0000** | **1,328.4916** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.1942 | 1.7765 | 2.0061 | 3.3300e-003 | | 0.0864 | 0.0864 | | 0.0813 | 0.0813 | 0.0000 | 286.2785 | 286.2785 | 0.0681 | 0.0000 | 287.9811 |
| **Total** | **0.1942** | **1.7765** | **2.0061** | **3.3300e-003** | | **0.0864** | **0.0864** | | **0.0813** | **0.0813** | **0.0000** | **286.2785** | **286.2785** | **0.0681** | **0.0000** | **287.9811** |

## 3.5 Building Construction - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0382 | 1.2511 | 0.4011 | 4.3000e-003 | 0.1113 | 1.4600e-003 | 0.1127 | 0.0321 | 1.4000e-003 | 0.0335 | 0.0000 | 417.9930 | 417.9930 | 0.0228 | 0.0000 | 418.5624 |
| Worker | 0.3753 | 0.2708 | 3.1696 | 0.0101 | 1.0840 | 8.4100e-003 | 1.0924 | 0.2879 | 7.7400e-003 | 0.2957 | 0.0000 | 909.3439 | 909.3439 | 0.0234 | 0.0000 | 909.9291 |
| **Total** | **0.4135** | **1.5218** | **3.5707** | **0.0144** | **1.1953** | **9.8700e-003** | **1.2051** | **0.3200** | **9.1400e-003** | **0.3292** | **0.0000** | **1,327.3369** | **1,327.3369** | **0.0462** | **0.0000** | **1,328.4916** |

## 3.6 Paving - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 6.7100e-003 | 0.0663 | 0.0948 | 1.5000e-004 | | 3.3200e-003 | 3.3200e-003 | | 3.0500e-003 | 3.0500e-003 | 0.0000 | 13.0175 | 13.0175 | 4.2100e-003 | 0.0000 | 13.1227 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| **Total** | **6.7100e-003** | **0.0663** | **0.0948** | **1.5000e-004** | | **3.3200e-003** | **3.3200e-003** | | **3.0500e-003** | **3.0500e-003** | **0.0000** | **13.0175** | **13.0175** | **4.2100e-003** | **0.0000** | **13.1227** |

## 3.6 Paving - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 3.7000e-004 | 2.7000e-004 | 3.1200e-003 | 1.0000e-005 | 1.0700e-003 | 1.0000e-005 | 1.0800e-003 | 2.8000e-004 | 1.0000e-005 | 2.9000e-004 | 0.0000 | 0.8963 | 0.8963 | 2.0000e-005 | 0.0000 | 0.8968 |
| **Total** | **3.7000e-004** | **2.7000e-004** | **3.1200e-003** | **1.0000e-005** | **1.0700e-003** | **1.0000e-005** | **1.0800e-003** | **2.8000e-004** | **1.0000e-005** | **2.9000e-004** | **0.0000** | **0.8963** | **0.8963** | **2.0000e-005** | **0.0000** | **0.8968** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 6.7100e-003 | 0.0663 | 0.0948 | 1.5000e-004 | | 3.3200e-003 | 3.3200e-003 | | 3.0500e-003 | 3.0500e-003 | 0.0000 | 13.0175 | 13.0175 | 4.2100e-003 | 0.0000 | 13.1227 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| **Total** | **6.7100e-003** | **0.0663** | **0.0948** | **1.5000e-004** | | **3.3200e-003** | **3.3200e-003** | | **3.0500e-003** | **3.0500e-003** | **0.0000** | **13.0175** | **13.0175** | **4.2100e-003** | **0.0000** | **13.1227** |

## 3.6 Paving - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 3.7000e-004 | 2.7000e-004 | 3.1200e-003 | 1.0000e-005 | 1.0700e-003 | 1.0000e-005 | 1.0800e-003 | 2.8000e-004 | 1.0000e-005 | 2.9000e-004 | 0.0000 | 0.8963 | 0.8963 | 2.0000e-005 | 0.0000 | 0.8968 |
| **Total** | **3.7000e-004** | **2.7000e-004** | **3.1200e-003** | **1.0000e-005** | **1.0700e-003** | **1.0000e-005** | **1.0800e-003** | **2.8000e-004** | **1.0000e-005** | **2.9000e-004** | **0.0000** | **0.8963** | **0.8963** | **2.0000e-005** | **0.0000** | **0.8968** |

## 3.6 Paving - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.0109 | 0.1048 | 0.1609 | 2.5000e-004 | | 5.1500e-003 | 5.1500e-003 | | 4.7400e-003 | 4.7400e-003 | 0.0000 | 22.0292 | 22.0292 | 7.1200e-003 | 0.0000 | 22.2073 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| **Total** | **0.0109** | **0.1048** | **0.1609** | **2.5000e-004** | | **5.1500e-003** | **5.1500e-003** | | **4.7400e-003** | **4.7400e-003** | **0.0000** | **22.0292** | **22.0292** | **7.1200e-003** | **0.0000** | **22.2073** |

## 3.6 Paving - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 5.9000e-004 | 4.1000e-004 | 4.9200e-003 | 2.0000e-005 | 1.8100e-003 | 1.0000e-005 | 1.8200e-003 | 4.8000e-004 | 1.0000e-005 | 4.9000e-004 | 0.0000 | 1.4697 | 1.4697 | 4.0000e-005 | 0.0000 | 1.4706 |
| **Total** | **5.9000e-004** | **4.1000e-004** | **4.9200e-003** | **2.0000e-005** | **1.8100e-003** | **1.0000e-005** | **1.8200e-003** | **4.8000e-004** | **1.0000e-005** | **4.9000e-004** | **0.0000** | **1.4697** | **1.4697** | **4.0000e-005** | **0.0000** | **1.4706** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.0109 | 0.1048 | 0.1609 | 2.5000e-004 | | 5.1500e-003 | 5.1500e-003 | | 4.7400e-003 | 4.7400e-003 | 0.0000 | 22.0292 | 22.0292 | 7.1200e-003 | 0.0000 | 22.2073 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| **Total** | **0.0109** | **0.1048** | **0.1609** | **2.5000e-004** | | **5.1500e-003** | **5.1500e-003** | | **4.7400e-003** | **4.7400e-003** | **0.0000** | **22.0292** | **22.0292** | **7.1200e-003** | **0.0000** | **22.2073** |

## 3.6 Paving - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 5.9000e-004 | 4.1000e-004 | 4.9200e-003 | 2.0000e-005 | 1.8100e-003 | 1.0000e-005 | 1.8200e-003 | 4.8000e-004 | 1.0000e-005 | 4.9000e-004 | 0.0000 | 1.4697 | 1.4697 | 4.0000e-005 | 0.0000 | 1.4706 |
| **Total** | **5.9000e-004** | **4.1000e-004** | **4.9200e-003** | **2.0000e-005** | **1.8100e-003** | **1.0000e-005** | **1.8200e-003** | **4.8000e-004** | **1.0000e-005** | **4.9000e-004** | **0.0000** | **1.4697** | **1.4697** | **4.0000e-005** | **0.0000** | **1.4706** |

## 3.7 Architectural Coating - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Archit. Coating | 4.1372 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 3.1600e-003 | 0.0213 | 0.0317 | 5.0000e-005 | | 1.0700e-003 | 1.0700e-003 | | 1.0700e-003 | 1.0700e-003 | 0.0000 | 4.4682 | 4.4682 | 2.5000e-004 | 0.0000 | 4.4745 |
| **Total** | **4.1404** | **0.0213** | **0.0317** | **5.0000e-005** | | **1.0700e-003** | **1.0700e-003** | | **1.0700e-003** | **1.0700e-003** | **0.0000** | **4.4682** | **4.4682** | **2.5000e-004** | **0.0000** | **4.4745** |

## 3.7 Architectural Coating - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 0.0101 | 6.9900e-003 | 0.0835 | 2.8000e-004 | 0.0307 | 2.3000e-004 | 0.0309 | 8.1500e-003 | 2.2000e-004 | 8.3700e-003 | 0.0000 | 24.9407 | 24.9407 | 6.1000e-004 | 0.0000 | 24.9558 |
| **Total** | **0.0101** | **6.9900e-003** | **0.0835** | **2.8000e-004** | **0.0307** | **2.3000e-004** | **0.0309** | **8.1500e-003** | **2.2000e-004** | **8.3700e-003** | **0.0000** | **24.9407** | **24.9407** | **6.1000e-004** | **0.0000** | **24.9558** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Archit. Coating | 4.1372 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 3.1600e-003 | 0.0213 | 0.0317 | 5.0000e-005 | | 1.0700e-003 | 1.0700e-003 | | 1.0700e-003 | 1.0700e-003 | 0.0000 | 4.4682 | 4.4682 | 2.5000e-004 | 0.0000 | 4.4745 |
| **Total** | **4.1404** | **0.0213** | **0.0317** | **5.0000e-005** | | **1.0700e-003** | **1.0700e-003** | | **1.0700e-003** | **1.0700e-003** | **0.0000** | **4.4682** | **4.4682** | **2.5000e-004** | **0.0000** | **4.4745** |

### 3.7 Architectural Coating - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 0.0101 | 6.9900e-003 | 0.0835 | 2.8000e-004 | 0.0307 | 2.3000e-004 | 0.0309 | 8.1500e-003 | 2.2000e-004 | 8.3700e-003 | 0.0000 | 24.9407 | 24.9407 | 6.1000e-004 | 0.0000 | 24.9558 |
| **Total** | **0.0101** | **6.9900e-003** | **0.0835** | **2.8000e-004** | **0.0307** | **2.3000e-004** | **0.0309** | **8.1500e-003** | **2.2000e-004** | **8.3700e-003** | **0.0000** | **24.9407** | **24.9407** | **6.1000e-004** | **0.0000** | **24.9558** |

## 4.0 Operational Detail - Mobile

### 4.1 Mitigation Measures Mobile

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Mitigated | 1.5857 | 7.9962 | 19.1834 | 0.0821 | 7.7979 | 0.0580 | 7.8559 | 2.0895 | 0.0539 | 2.1434 | 0.0000 | 7,620.4986 | 7,620.4986 | 0.3407 | 0.0000 | 7,629.0162 |
| Unmitigated | 1.5857 | 7.9962 | 19.1834 | 0.0821 | 7.7979 | 0.0580 | 7.8559 | 2.0895 | 0.0539 | 2.1434 | 0.0000 | 7,620.4986 | 7,620.4986 | 0.3407 | 0.0000 | 7,629.0162 |

## 4.2 Trip Summary Information

| | Average Daily Trip Rate | | | Unmitigated | Mitigated |
|---|---|---|---|---|---|
| Land Use | Weekday | Saturday | Sunday | Annual VMT | Annual VMT |
| Apartments Low Rise | 145.75 | 154.25 | 154.00 | 506,227 | 506,227 |
| Apartments Mid Rise | 4,026.75 | 3,773.25 | 4075.50 | 13,660,065 | 13,660,065 |
| General Office Building | 288.45 | 62.55 | 31.05 | 706,812 | 706,812 |
| High Turnover (Sit Down Restaurant) | 2,368.80 | 2,873.52 | 2817.72 | 3,413,937 | 3,413,937 |
| Hotel | 192.00 | 187.50 | 160.00 | 445,703 | 445,703 |
| Quality Restaurant | 501.12 | 511.92 | 461.20 | 707,488 | 707,488 |
| Regional Shopping Center | 528.08 | 601.44 | 357.84 | 1,112,221 | 1,112,221 |
| Total | 8,050.95 | 8,164.43 | 8,057.31 | 20,552,452 | 20,552,452 |

## 4.3 Trip Type Information

| | Miles | | | Trip % | | | Trip Purpose % | | |
|---|---|---|---|---|---|---|---|---|---|
| Land Use | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted | Pass-by |
| Apartments Low Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| Apartments Mid Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| General Office Building | 16.60 | 8.40 | 6.90 | 33.00 | 48.00 | 19.00 | 77 | 19 | 4 |
| High Turnover (Sit Down | 16.60 | 8.40 | 6.90 | 8.50 | 72.50 | 19.00 | 37 | 20 | 43 |
| Hotel | 16.60 | 8.40 | 6.90 | 19.40 | 61.60 | 19.00 | 58 | 38 | 4 |
| Quality Restaurant | 16.60 | 8.40 | 6.90 | 12.00 | 69.00 | 19.00 | 38 | 18 | 44 |
| Regional Shopping Center | 16.60 | 8.40 | 6.90 | 16.30 | 64.70 | 19.00 | 54 | 35 | 11 |

### 4.4 Fleet Mix

| Land Use | LDA | LDT1 | LDT2 | MDV | LHD1 | LHD2 | MHD | HHD | OBUS | UBUS | MCY | SBUS | MH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Apartments Low Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Apartments Mid Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| General Office Building | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| High Turnover (Sit Down Restaurant) | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Hotel | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Quality Restaurant | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Regional Shopping Center | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |

## 5.0 Energy Detail

Historical Energy Use: N

### 5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Electricity Mitigated | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 2,512.6465 | 2,512.6465 | 0.1037 | 0.0215 | 2,521.6356 |
| Electricity Unmitigated | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 2,512.6465 | 2,512.6465 | 0.1037 | 0.0215 | 2,521.6356 |
| NaturalGas Mitigated | 0.1398 | 1.2312 | 0.7770 | 7.6200e-003 | | 0.0966 | 0.0966 | | 0.0966 | 0.0966 | 0.0000 | 1,383.4267 | 1,383.4267 | 0.0265 | 0.0254 | 1,391.6478 |
| NaturalGas Unmitigated | 0.1398 | 1.2312 | 0.7770 | 7.6200e-003 | | 0.0966 | 0.0966 | | 0.0966 | 0.0966 | 0.0000 | 1,383.4267 | 1,383.4267 | 0.0265 | 0.0254 | 1,391.6478 |

## 5.2 Energy by Land Use - NaturalGas

**Unmitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Apartments Low Rise | 408494 | 2.2000e-003 | 0.0188 | 8.0100e-003 | 1.2000e-004 | | 1.5200e-003 | 1.5200e-003 | | 1.5200e-003 | 1.5200e-003 | 0.0000 | 21.7988 | 21.7988 | 4.2000e-004 | 4.0000e-004 | 21.9284 |
| Apartments Mid Rise | 1.30613e+007 | 0.0704 | 0.6018 | 0.2561 | 3.8400e-003 | | 0.0487 | 0.0487 | | 0.0487 | 0.0487 | 0.0000 | 696.9989 | 696.9989 | 0.0134 | 0.0128 | 701.1408 |
| General Office Building | 468450 | 2.5300e-003 | 0.0230 | 0.0193 | 1.4000e-004 | | 1.7500e-003 | 1.7500e-003 | | 1.7500e-003 | 1.7500e-003 | 0.0000 | 24.9983 | 24.9983 | 4.8000e-004 | 4.6000e-004 | 25.1468 |
| High Turnover (Sit Down Restaurant) | 8.30736e+006 | 0.0448 | 0.4072 | 0.3421 | 2.4400e-003 | | 0.0310 | 0.0310 | | 0.0310 | 0.0310 | 0.0000 | 443.3124 | 443.3124 | 8.5000e-003 | 8.1300e-003 | 445.9468 |
| Hotel | 1.74095e+006 | 9.3900e-003 | 0.0853 | 0.0717 | 5.1000e-004 | | 6.4900e-003 | 6.4900e-003 | | 6.4900e-003 | 6.4900e-003 | 0.0000 | 92.9036 | 92.9036 | 1.7800e-003 | 1.7000e-003 | 93.4557 |
| Quality Restaurant | 1.84608e+006 | 9.9500e-003 | 0.0905 | 0.0760 | 5.4000e-004 | | 6.8800e-003 | 6.8800e-003 | | 6.8800e-003 | 6.8800e-003 | 0.0000 | 98.5139 | 98.5139 | 1.8900e-003 | 1.8100e-003 | 99.0993 |
| Regional Shopping Center | 91840 | 5.0000e-004 | 4.5000e-003 | 3.7800e-003 | 3.0000e-005 | | 3.4000e-004 | 3.4000e-004 | | 3.4000e-004 | 3.4000e-004 | 0.0000 | 4.9009 | 4.9009 | 9.0000e-005 | 9.0000e-005 | 4.9301 |
| **Total** | | **0.1398** | **1.2312** | **0.7770** | **7.6200e-003** | | **0.0966** | **0.0966** | | **0.0966** | **0.0966** | **0.0000** | **1,383.4268** | **1,383.4268** | **0.0265** | **0.0254** | **1,391.6478** |

## 5.2 Energy by Land Use - NaturalGas

**Mitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Apartments Low Rise | 408494 | 2.2000e-003 | 0.0188 | 8.0100e-003 | 1.2000e-004 | | 1.5200e-003 | 1.5200e-003 | | 1.5200e-003 | 1.5200e-003 | 0.0000 | 21.7988 | 21.7988 | 4.2000e-004 | 4.0000e-004 | 21.9284 |
| Apartments Mid Rise | 1.30613e+007 | 0.0704 | 0.6018 | 0.2561 | 3.8400e-003 | | 0.0487 | 0.0487 | | 0.0487 | 0.0487 | 0.0000 | 696.9989 | 696.9989 | 0.0134 | 0.0128 | 701.1408 |
| General Office Building | 468450 | 2.5300e-003 | 0.0230 | 0.0193 | 1.4000e-004 | | 1.7500e-003 | 1.7500e-003 | | 1.7500e-003 | 1.7500e-003 | 0.0000 | 24.9983 | 24.9983 | 4.8000e-004 | 4.6000e-004 | 25.1468 |
| High Turnover (Sit Down Restaurant) | 8.30736e+006 | 0.0448 | 0.4072 | 0.3421 | 2.4400e-003 | | 0.0310 | 0.0310 | | 0.0310 | 0.0310 | 0.0000 | 443.3124 | 443.3124 | 8.5000e-003 | 8.1300e-003 | 445.9468 |
| Hotel | 1.74095e+006 | 9.3900e-003 | 0.0853 | 0.0717 | 5.1000e-004 | | 6.4900e-003 | 6.4900e-003 | | 6.4900e-003 | 6.4900e-003 | 0.0000 | 92.9036 | 92.9036 | 1.7800e-003 | 1.7000e-003 | 93.4557 |
| Quality Restaurant | 1.84608e+006 | 9.9500e-003 | 0.0905 | 0.0760 | 5.4000e-004 | | 6.8800e-003 | 6.8800e-003 | | 6.8800e-003 | 6.8800e-003 | 0.0000 | 98.5139 | 98.5139 | 1.8900e-003 | 1.8100e-003 | 99.0993 |
| Regional Shopping Center | 91840 | 5.0000e-004 | 4.5000e-003 | 3.7800e-003 | 3.0000e-005 | | 3.4000e-004 | 3.4000e-004 | | 3.4000e-004 | 3.4000e-004 | 0.0000 | 4.9009 | 4.9009 | 9.0000e-005 | 9.0000e-005 | 4.9301 |
| **Total** | | **0.1398** | **1.2312** | **0.7770** | **7.6200e-003** | | **0.0966** | **0.0966** | | **0.0966** | **0.0966** | **0.0000** | **1,383.4268** | **1,383.4268** | **0.0265** | **0.0254** | **1,391.6478** |

## 5.3 Energy by Land Use - Electricity

**Unmitigated**

| | Electricity Use | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | kWh/yr | MT/yr | | | |
| Apartments Low Rise | 106010 | 33.7770 | 1.3900e-003 | 2.9000e-004 | 33.8978 |
| Apartments Mid Rise | 3.94697e+006 | 1,257.5879 | 0.0519 | 0.0107 | 1,262.0869 |
| General Office Building | 584550 | 186.2502 | 7.6900e-003 | 1.5900e-003 | 186.9165 |
| High Turnover (Sit Down Restaurant) | 1.58904e+006 | 506.3022 | 0.0209 | 4.3200e-003 | 508.1135 |
| Hotel | 550308 | 175.3399 | 7.2400e-003 | 1.5000e-003 | 175.9672 |
| Quality Restaurant | 353120 | 112.5116 | 4.6500e-003 | 9.6000e-004 | 112.9141 |
| Regional Shopping Center | 756000 | 240.8778 | 9.9400e-003 | 2.0600e-003 | 241.7395 |
| **Total** | | **2,512.6465** | **0.1037** | **0.0215** | **2,521.6356** |

## 5.3 Energy by Land Use - Electricity

**Mitigated**

| | Electricity Use | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | kWh/yr | MT/yr | | | |
| Apartments Low Rise | 106010 | 33.7770 | 1.3900e-003 | 2.9000e-004 | 33.8978 |
| Apartments Mid Rise | 3.94697e+006 | 1,257.5879 | 0.0519 | 0.0107 | 1,262.0869 |
| General Office Building | 584550 | 186.2502 | 7.6900e-003 | 1.5900e-003 | 186.9165 |
| High Turnover (Sit Down Restaurant) | 1.58904e+006 | 506.3022 | 0.0209 | 4.3200e-003 | 508.1135 |
| Hotel | 550308 | 175.3399 | 7.2400e-003 | 1.5000e-003 | 175.9672 |
| Quality Restaurant | 353120 | 112.5116 | 4.6500e-003 | 9.6000e-004 | 112.9141 |
| Regional Shopping Center | 756000 | 240.8778 | 9.9400e-003 | 2.0600e-003 | 241.7395 |
| **Total** | | **2,512.6465** | **0.1037** | **0.0215** | **2,521.6356** |

# 6.0 Area Detail

## 6.1 Mitigation Measures Area

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Mitigated | 5.1437 | 0.2950 | 10.3804 | 1.6700e-003 | | 0.0714 | 0.0714 | | 0.0714 | 0.0714 | 0.0000 | 220.9670 | 220.9670 | 0.0201 | 3.7400e-003 | 222.5835 |
| Unmitigated | 5.1437 | 0.2950 | 10.3804 | 1.6700e-003 | | 0.0714 | 0.0714 | | 0.0714 | 0.0714 | 0.0000 | 220.9670 | 220.9670 | 0.0201 | 3.7400e-003 | 222.5835 |

## 6.2 Area by SubCategory

**Unmitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Architectural Coating | 0.4137 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Consumer Products | 4.3998 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Hearth | 0.0206 | 0.1763 | 0.0750 | 1.1200e-003 | | 0.0143 | 0.0143 | | 0.0143 | 0.0143 | 0.0000 | 204.1166 | 204.1166 | 3.9100e-003 | 3.7400e-003 | 205.3295 |
| Landscaping | 0.3096 | 0.1187 | 10.3054 | 5.4000e-004 | | 0.0572 | 0.0572 | | 0.0572 | 0.0572 | 0.0000 | 16.8504 | 16.8504 | 0.0161 | 0.0000 | 17.2540 |
| **Total** | **5.1437** | **0.2950** | **10.3804** | **1.6600e-003** | | **0.0714** | **0.0714** | | **0.0714** | **0.0714** | **0.0000** | **220.9670** | **220.9670** | **0.0201** | **3.7400e-003** | **222.5835** |

## 6.2 Area by SubCategory

**Mitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Architectural Coating | 0.4137 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Consumer Products | 4.3998 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Hearth | 0.0206 | 0.1763 | 0.0750 | 1.1200e-003 | | 0.0143 | 0.0143 | | 0.0143 | 0.0143 | 0.0000 | 204.1166 | 204.1166 | 3.9100e-003 | 3.7400e-003 | 205.3295 |
| Landscaping | 0.3096 | 0.1187 | 10.3054 | 5.4000e-004 | | 0.0572 | 0.0572 | | 0.0572 | 0.0572 | 0.0000 | 16.8504 | 16.8504 | 0.0161 | 0.0000 | 17.2540 |
| **Total** | **5.1437** | **0.2950** | **10.3804** | **1.6600e-003** | | **0.0714** | **0.0714** | | **0.0714** | **0.0714** | **0.0000** | **220.9670** | **220.9670** | **0.0201** | **3.7400e-003** | **222.5835** |

# 7.0 Water Detail

## 7.1 Mitigation Measures Water

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

| | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|
| Category | MT/yr | | | |
| Mitigated | 585.8052 | 3.0183 | 0.0755 | 683.7567 |
| Unmitigated | 585.8052 | 3.0183 | 0.0755 | 683.7567 |

## 7.2 Water by Land Use

**Unmitigated**

| | Indoor/Outdoor Use | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | Mgal | MT/yr | | | |
| Apartments Low Rise | 1.62885 / 1.02688 | 10.9095 | 0.0535 | 1.3400e-003 | 12.6471 |
| Apartments Mid Rise | 63.5252 / 40.0485 | 425.4719 | 2.0867 | 0.0523 | 493.2363 |
| General Office Building | 7.99802 / 4.90201 | 53.0719 | 0.2627 | 6.5900e-003 | 61.6019 |
| High Turnover (Sit Down Restaurant) | 10.9272 / 0.697482 | 51.2702 | 0.3580 | 8.8200e-003 | 62.8482 |
| Hotel | 1.26834 / 0.140927 | 6.1633 | 0.0416 | 1.0300e-003 | 7.5079 |
| Quality Restaurant | 2.42827 / 0.154996 | 11.3934 | 0.0796 | 1.9600e-003 | 13.9663 |
| Regional Shopping Center | 4.14806 / 2.54236 | 27.5250 | 0.1363 | 3.4200e-003 | 31.9490 |
| **Total** | | **585.8052** | **3.0183** | **0.0755** | **683.7567** |

## 7.2 Water by Land Use

**Mitigated**

| | Indoor/Outdoor Use | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | Mgal | MT/yr | | | |
| Apartments Low Rise | 1.62885 / 1.02688 | 10.9095 | 0.0535 | 1.3400e-003 | 12.6471 |
| Apartments Mid Rise | 63.5252 / 40.0485 | 425.4719 | 2.0867 | 0.0523 | 493.2363 |
| General Office Building | 7.99802 / 4.90201 | 53.0719 | 0.2627 | 6.5900e-003 | 61.6019 |
| High Turnover (Sit Down Restaurant) | 10.9272 / 0.697482 | 51.2702 | 0.3580 | 8.8200e-003 | 62.8482 |
| Hotel | 1.26834 / 0.140927 | 6.1633 | 0.0416 | 1.0300e-003 | 7.5079 |
| Quality Restaurant | 2.42827 / 0.154996 | 11.3934 | 0.0796 | 1.9600e-003 | 13.9663 |
| Regional Shopping Center | 4.14806 / 2.54236 | 27.5250 | 0.1363 | 3.4200e-003 | 31.9490 |
| **Total** | | **585.8052** | **3.0183** | **0.0755** | **683.7567** |

# 8.0 Waste Detail

## 8.1 Mitigation Measures Waste

**Category/Year**

| | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|
| | MT/yr | | | |
| Mitigated | 207.8079 | 12.2811 | 0.0000 | 514.8354 |
| Unmitigated | 207.8079 | 12.2811 | 0.0000 | 514.8354 |

## 8.2 Waste by Land Use

**Unmitigated**

| | Waste Disposed | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | tons | MT/yr | | | |
| Apartments Low Rise | 11.5 | 2.3344 | 0.1380 | 0.0000 | 5.7834 |
| Apartments Mid Rise | 448.5 | 91.0415 | 5.3804 | 0.0000 | 225.5513 |
| General Office Building | 41.85 | 8.4952 | 0.5021 | 0.0000 | 21.0464 |
| High Turnover (Sit Down Restaurant) | 428.4 | 86.9613 | 5.1393 | 0.0000 | 215.4430 |
| Hotel | 27.38 | 5.5579 | 0.3285 | 0.0000 | 13.7694 |
| Quality Restaurant | 7.3 | 1.4818 | 0.0876 | 0.0000 | 3.6712 |
| Regional Shopping Center | 58.8 | 11.9359 | 0.7054 | 0.0000 | 29.5706 |
| **Total** | | **207.8079** | **12.2811** | **0.0000** | **514.8354** |

## 8.2 Waste by Land Use

**Mitigated**

| | Waste Disposed | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | tons | MT/yr | | | |
| Apartments Low Rise | 11.5 | 2.3344 | 0.1380 | 0.0000 | 5.7834 |
| Apartments Mid Rise | 448.5 | 91.0415 | 5.3804 | 0.0000 | 225.5513 |
| General Office Building | 41.85 | 8.4952 | 0.5021 | 0.0000 | 21.0464 |
| High Turnover (Sit Down Restaurant) | 428.4 | 86.9613 | 5.1393 | 0.0000 | 215.4430 |
| Hotel | 27.38 | 5.5579 | 0.3285 | 0.0000 | 13.7694 |
| Quality Restaurant | 7.3 | 1.4818 | 0.0876 | 0.0000 | 3.6712 |
| Regional Shopping Center | 58.8 | 11.9359 | 0.7054 | 0.0000 | 29.5706 |
| **Total** | | **207.8079** | **12.2811** | **0.0000** | **514.8354** |

## 9.0 Operational Offroad

| Equipment Type | Number | Hours/Day | Days/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

## 10.0 Stationary Equipment

**Fire Pumps and Emergency Generators**

| Equipment Type | Number | Hours/Day | Hours/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

**Boilers**

| Equipment Type | Number | Heat Input/Day | Heat Input/Year | Boiler Rating | Fuel Type |
|---|---|---|---|---|---|

**User Defined Equipment**

| Equipment Type | Number |
|---|---|

## 11.0 Vegetation

# Village South Specific Plan (Proposed)

**Los Angeles-South Coast County, Summer**

## 1.0 Project Characteristics

### 1.1 Land Usage

| Land Uses | Size | Metric | Lot Acreage | Floor Surface Area | Population |
|---|---|---|---|---|---|
| General Office Building | 45.00 | 1000sqft | 1.03 | 45,000.00 | 0 |
| High Turnover (Sit Down Restaurant) | 36.00 | 1000sqft | 0.83 | 36,000.00 | 0 |
| Hotel | 50.00 | Room | 1.67 | 72,600.00 | 0 |
| Quality Restaurant | 8.00 | 1000sqft | 0.18 | 8,000.00 | 0 |
| Apartments Low Rise | 25.00 | Dwelling Unit | 1.56 | 25,000.00 | 72 |
| Apartments Mid Rise | 975.00 | Dwelling Unit | 25.66 | 975,000.00 | 2789 |
| Regional Shopping Center | 56.00 | 1000sqft | 1.29 | 56,000.00 | 0 |

### 1.2 Other Project Characteristics

| | | | | | |
|---|---|---|---|---|---|
| **Urbanization** | Urban | **Wind Speed (m/s)** | 2.2 | **Precipitation Freq (Days)** | 33 |
| **Climate Zone** | 9 | | | **Operational Year** | 2028 |
| **Utility Company** | Southern California Edison | | | | |
| **CO2 Intensity (lb/MWhr)** | 702.44 | **CH4 Intensity (lb/MWhr)** | 0.029 | **N2O Intensity (lb/MWhr)** | 0.006 |

### 1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

| Table Name | Column Name | Default Value | New Value |
|---|---|---|---|
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | NumberWood | 1.25 | 0.00 |
| tblFireplaces | NumberWood | 48.75 | 0.00 |
| tblVehicleTrips | ST_TR | 7.16 | 6.17 |
| tblVehicleTrips | ST_TR | 6.39 | 3.87 |
| tblVehicleTrips | ST_TR | 2.46 | 1.39 |
| tblVehicleTrips | ST_TR | 158.37 | 79.82 |
| tblVehicleTrips | ST_TR | 8.19 | 3.75 |
| tblVehicleTrips | ST_TR | 94.36 | 63.99 |
| tblVehicleTrips | ST_TR | 49.97 | 10.74 |
| tblVehicleTrips | SU_TR | 6.07 | 6.16 |
| tblVehicleTrips | SU_TR | 5.86 | 4.18 |
| tblVehicleTrips | SU_TR | 1.05 | 0.69 |
| tblVehicleTrips | SU_TR | 131.84 | 78.27 |

| | | | |
|---|---|---|---|
| tblVehicleTrips | SU_TR | 5.95 | 3.20 |
| tblVehicleTrips | SU_TR | 72.16 | 57.65 |
| tblVehicleTrips | SU_TR | 25.24 | 6.39 |
| tblVehicleTrips | WD_TR | 6.59 | 5.83 |
| tblVehicleTrips | WD_TR | 6.65 | 4.13 |
| tblVehicleTrips | WD_TR | 11.03 | 6.41 |
| tblVehicleTrips | WD_TR | 127.15 | 65.80 |
| tblVehicleTrips | WD_TR | 8.17 | 3.84 |
| tblVehicleTrips | WD_TR | 89.95 | 62.64 |
| tblVehicleTrips | WD_TR | 42.70 | 9.43 |
| tblWoodstoves | NumberCatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberCatalytic | 48.75 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 48.75 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |

## 2.0 Emissions Summary

## 2.1 Overall Construction (Maximum Daily Emission)

**Unmitigated Construction**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | lb/day | | | | | | | | | | lb/day | | | | | |
| 2021 | 4.2769 | 46.4588 | 31.6840 | 0.0643 | 18.2675 | 2.0461 | 20.3135 | 9.9840 | 1.8824 | 11.8664 | 0.0000 | 6,234.7974 | 6,234.7974 | 1.9495 | 0.0000 | 6,283.5352 |
| 2022 | 5.3304 | 38.8967 | 49.5629 | 0.1517 | 9.8688 | 1.6366 | 10.7727 | 3.6558 | 1.5057 | 5.1615 | 0.0000 | 15,251.5674 | 15,251.5674 | 1.9503 | 0.0000 | 15,278.5288 |
| 2023 | 4.8957 | 26.3317 | 46.7567 | 0.1472 | 9.8688 | 0.7794 | 10.6482 | 2.6381 | 0.7322 | 3.3702 | 0.0000 | 14,807.5269 | 14,807.5269 | 1.0250 | 0.0000 | 14,833.1521 |
| 2024 | 237.1630 | 9.5575 | 15.1043 | 0.0244 | 1.7884 | 0.4698 | 1.8628 | 0.4743 | 0.4322 | 0.5476 | 0.0000 | 2,361.3989 | 2,361.3989 | 0.7177 | 0.0000 | 2,379.3421 |
| **Maximum** | **237.1630** | **46.4588** | **49.5629** | **0.1517** | **18.2675** | **2.0461** | **20.3135** | **9.9840** | **1.8824** | **11.8664** | **0.0000** | **15,251.5674** | **15,251.5674** | **1.9503** | **0.0000** | **15,278.5288** |

## 2.1 Overall Construction (Maximum Daily Emission)

**Mitigated Construction**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | lb/day | | | | | | | | | | lb/day | | | | | |
| 2021 | 4.2769 | 46.4588 | 31.6840 | 0.0643 | 18.2675 | 2.0461 | 20.3135 | 9.9840 | 1.8824 | 11.8664 | 0.0000 | 6,234.7974 | 6,234.7974 | 1.9495 | 0.0000 | 6,283.5352 |
| 2022 | 5.3304 | 38.8967 | 49.5629 | 0.1517 | 9.8688 | 1.6366 | 10.7727 | 3.6558 | 1.5057 | 5.1615 | 0.0000 | 15,251.5674 | 15,251.5674 | 1.9503 | 0.0000 | 15,278.5288 |
| 2023 | 4.8957 | 26.3317 | 46.7567 | 0.1472 | 9.8688 | 0.7794 | 10.6482 | 2.6381 | 0.7322 | 3.3702 | 0.0000 | 14,807.5269 | 14,807.5269 | 1.0250 | 0.0000 | 14,833.1520 |
| 2024 | 237.1630 | 9.5575 | 15.1043 | 0.0244 | 1.7884 | 0.4698 | 1.8628 | 0.4743 | 0.4322 | 0.5476 | 0.0000 | 2,361.3989 | 2,361.3989 | 0.7177 | 0.0000 | 2,379.3421 |
| **Maximum** | **237.1630** | **46.4588** | **49.5629** | **0.1517** | **18.2675** | **2.0461** | **20.3135** | **9.9840** | **1.8824** | **11.8664** | **0.0000** | **15,251.5674** | **15,251.5674** | **1.9503** | **0.0000** | **15,278.5288** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Percent Reduction** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** |

## 2.2 Overall Operational

### Unmitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Area | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Energy | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| Mobile | 9.8489 | 45.4304 | 114.8495 | 0.4917 | 45.9592 | 0.3360 | 46.2951 | 12.2950 | 0.3119 | 12.6070 | | 50,306.6034 | 50,306.6034 | 2.1807 | | 50,361.1208 |
| **Total** | **41.1168** | **67.2262** | **207.5497** | **0.6278** | **45.9592** | **2.4626** | **48.4217** | **12.2950** | **2.4385** | **14.7336** | **0.0000** | **76,811.1816** | **76,811.1816** | **2.8282** | **0.4832** | **77,025.8786** |

### Mitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Area | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Energy | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| Mobile | 9.8489 | 45.4304 | 114.8495 | 0.4917 | 45.9592 | 0.3360 | 46.2951 | 12.2950 | 0.3119 | 12.6070 | | 50,306.6034 | 50,306.6034 | 2.1807 | | 50,361.1208 |
| **Total** | **41.1168** | **67.2262** | **207.5497** | **0.6278** | **45.9592** | **2.4626** | **48.4217** | **12.2950** | **2.4385** | **14.7336** | **0.0000** | **76,811.1816** | **76,811.1816** | **2.8282** | **0.4832** | **77,025.8786** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Percent Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

## 3.0 Construction Detail

**Construction Phase**

| Phase Number | Phase Name | Phase Type | Start Date | End Date | Num Days Week | Num Days | Phase Description |
|---|---|---|---|---|---|---|---|
| 1 | Demolition | Demolition | 9/1/2021 | 10/12/2021 | 5 | 30 | |
| 2 | Site Preparation | Site Preparation | 10/13/2021 | 11/9/2021 | 5 | 20 | |
| 3 | Grading | Grading | 11/10/2021 | 1/11/2022 | 5 | 45 | |
| 4 | Building Construction | Building Construction | 1/12/2022 | 12/12/2023 | 5 | 500 | |
| 5 | Paving | Paving | 12/13/2023 | 1/30/2024 | 5 | 35 | |
| 6 | Architectural Coating | Architectural Coating | 1/31/2024 | 3/19/2024 | 5 | 35 | |

**Acres of Grading (Site Preparation Phase): 0**

**Acres of Grading (Grading Phase): 112.5**

**Acres of Paving: 0**

**Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)**

**OffRoad Equipment**

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

| Phase Name | Offroad Equipment Type | Amount | Usage Hours | Horse Power | Load Factor |
|---|---|---|---|---|---|
| Demolition | Concrete/Industrial Saws | 1 | 8.00 | 81 | 0.73 |
| Demolition | Excavators | 3 | 8.00 | 158 | 0.38 |
| Demolition | Rubber Tired Dozers | 2 | 8.00 | 247 | 0.40 |
| Site Preparation | Rubber Tired Dozers | 3 | 8.00 | 247 | 0.40 |
| Site Preparation | Tractors/Loaders/Backhoes | 4 | 8.00 | 97 | 0.37 |
| Grading | Excavators | 2 | 8.00 | 158 | 0.38 |
| Grading | Graders | 1 | 8.00 | 187 | 0.41 |
| Grading | Rubber Tired Dozers | 1 | 8.00 | 247 | 0.40 |
| Grading | Scrapers | 2 | 8.00 | 367 | 0.48 |
| Grading | Tractors/Loaders/Backhoes | 2 | 8.00 | 97 | 0.37 |
| Building Construction | Cranes | 1 | 7.00 | 231 | 0.29 |
| Building Construction | Forklifts | 3 | 8.00 | 89 | 0.20 |
| Building Construction | Generator Sets | 1 | 8.00 | 84 | 0.74 |
| Building Construction | Tractors/Loaders/Backhoes | 3 | 7.00 | 97 | 0.37 |
| Building Construction | Welders | 1 | 8.00 | 46 | 0.45 |
| Paving | Pavers | 2 | 8.00 | 130 | 0.42 |
| Paving | Paving Equipment | 2 | 8.00 | 132 | 0.36 |
| Paving | Rollers | 2 | 8.00 | 80 | 0.38 |
| Architectural Coating | Air Compressors | 1 | 6.00 | 78 | 0.48 |

**Trips and VMT**

| Phase Name | Offroad Equipment Count | Worker Trip Number | Vendor Trip Number | Hauling Trip Number | Worker Trip Length | Vendor Trip Length | Hauling Trip Length | Worker Vehicle Class | Vendor Vehicle Class | Hauling Vehicle Class |
|---|---|---|---|---|---|---|---|---|---|---|
| Demolition | 6 | 15.00 | 0.00 | 458.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Site Preparation | 7 | 18.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Grading | 8 | 20.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Building Construction | 9 | 801.00 | 143.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Paving | 6 | 15.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Architectural Coating | 1 | 160.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |

## 3.1 Mitigation Measures Construction

## 3.2 Demolition - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 3.3074 | 0.0000 | 3.3074 | 0.5008 | 0.0000 | 0.5008 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.1651 | 31.4407 | 21.5650 | 0.0388 | | 1.5513 | 1.5513 | | 1.4411 | 1.4411 | | 3,747.9449 | 3,747.9449 | 1.0549 | | 3,774.3174 |
| **Total** | **3.1651** | **31.4407** | **21.5650** | **0.0388** | **3.3074** | **1.5513** | **4.8588** | **0.5008** | **1.4411** | **1.9419** | | **3,747.9449** | **3,747.9449** | **1.0549** | | **3,774.3174** |

## 3.2 Demolition - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.1273 | 4.0952 | 0.9602 | 0.0119 | 0.2669 | 0.0126 | 0.2795 | 0.0732 | 0.0120 | 0.0852 | | 1,292.2413 | 1,292.2413 | 0.0877 | | 1,294.4337 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0643 | 0.0442 | 0.6042 | 1.7100e-003 | 0.1677 | 1.3500e-003 | 0.1690 | 0.0445 | 1.2500e-003 | 0.0457 | | 170.8155 | 170.8155 | 5.0300e-003 | | 170.9413 |
| **Total** | **0.1916** | **4.1394** | **1.5644** | **0.0136** | **0.4346** | **0.0139** | **0.4485** | **0.1176** | **0.0133** | **0.1309** | | **1,463.0568** | **1,463.0568** | **0.0927** | | **1,465.3750** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 3.3074 | 0.0000 | 3.3074 | 0.5008 | 0.0000 | 0.5008 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.1651 | 31.4407 | 21.5650 | 0.0388 | | 1.5513 | 1.5513 | | 1.4411 | 1.4411 | 0.0000 | 3,747.9449 | 3,747.9449 | 1.0549 | | 3,774.3174 |
| **Total** | **3.1651** | **31.4407** | **21.5650** | **0.0388** | **3.3074** | **1.5513** | **4.8588** | **0.5008** | **1.4411** | **1.9419** | **0.0000** | **3,747.9449** | **3,747.9449** | **1.0549** | | **3,774.3174** |

## 3.2 Demolition - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.1273 | 4.0952 | 0.9602 | 0.0119 | 0.2669 | 0.0126 | 0.2795 | 0.0732 | 0.0120 | 0.0852 | | 1,292.2413 | 1,292.2413 | 0.0877 | | 1,294.4337 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0643 | 0.0442 | 0.6042 | 1.7100e-003 | 0.1677 | 1.3500e-003 | 0.1690 | 0.0445 | 1.2500e-003 | 0.0457 | | 170.8155 | 170.8155 | 5.0300e-003 | | 170.9413 |
| **Total** | **0.1916** | **4.1394** | **1.5644** | **0.0136** | **0.4346** | **0.0139** | **0.4485** | **0.1176** | **0.0133** | **0.1309** | | **1,463.0568** | **1,463.0568** | **0.0927** | | **1,465.3750** |

## 3.3 Site Preparation - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 18.0663 | 0.0000 | 18.0663 | 9.9307 | 0.0000 | 9.9307 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.8882 | 40.4971 | 21.1543 | 0.0380 | | 2.0445 | 2.0445 | | 1.8809 | 1.8809 | | 3,685.6569 | 3,685.6569 | 1.1920 | | 3,715.4573 |
| **Total** | **3.8882** | **40.4971** | **21.1543** | **0.0380** | **18.0663** | **2.0445** | **20.1107** | **9.9307** | **1.8809** | **11.8116** | | **3,685.6569** | **3,685.6569** | **1.1920** | | **3,715.4573** |

## 3.3 Site Preparation - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0772 | 0.0530 | 0.7250 | 2.0600e-003 | 0.2012 | 1.6300e-003 | 0.2028 | 0.0534 | 1.5000e-003 | 0.0549 | | 204.9786 | 204.9786 | 6.0400e-003 | | 205.1296 |
| **Total** | **0.0772** | **0.0530** | **0.7250** | **2.0600e-003** | **0.2012** | **1.6300e-003** | **0.2028** | **0.0534** | **1.5000e-003** | **0.0549** | | **204.9786** | **204.9786** | **6.0400e-003** | | **205.1296** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 18.0663 | 0.0000 | 18.0663 | 9.9307 | 0.0000 | 9.9307 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.8882 | 40.4971 | 21.1543 | 0.0380 | | 2.0445 | 2.0445 | | 1.8809 | 1.8809 | 0.0000 | 3,685.6569 | 3,685.6569 | 1.1920 | | 3,715.4573 |
| **Total** | **3.8882** | **40.4971** | **21.1543** | **0.0380** | **18.0663** | **2.0445** | **20.1107** | **9.9307** | **1.8809** | **11.8116** | **0.0000** | **3,685.6569** | **3,685.6569** | **1.1920** | | **3,715.4573** |

## 3.3 Site Preparation - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0772 | 0.0530 | 0.7250 | 2.0600e-003 | 0.2012 | 1.6300e-003 | 0.2028 | 0.0534 | 1.5000e-003 | 0.0549 | | 204.9786 | 204.9786 | 6.0400e-003 | | 205.1296 |
| **Total** | **0.0772** | **0.0530** | **0.7250** | **2.0600e-003** | **0.2012** | **1.6300e-003** | **0.2028** | **0.0534** | **1.5000e-003** | **0.0549** | | **204.9786** | **204.9786** | **6.0400e-003** | | **205.1296** |

## 3.4 Grading - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 4.1912 | 46.3998 | 30.8785 | 0.0620 | | 1.9853 | 1.9853 | | 1.8265 | 1.8265 | | 6,007.0434 | 6,007.0434 | 1.9428 | | 6,055.6134 |
| **Total** | **4.1912** | **46.3998** | **30.8785** | **0.0620** | **8.6733** | **1.9853** | **10.6587** | **3.5965** | **1.8265** | **5.4230** | | **6,007.0434** | **6,007.0434** | **1.9428** | | **6,055.6134** |

## 3.4 Grading - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0857 | 0.0589 | 0.8056 | 2.2900e-003 | 0.2236 | 1.8100e-003 | 0.2254 | 0.0593 | 1.6600e-003 | 0.0610 | | 227.7540 | 227.7540 | 6.7100e-003 | | 227.9217 |
| **Total** | **0.0857** | **0.0589** | **0.8056** | **2.2900e-003** | **0.2236** | **1.8100e-003** | **0.2254** | **0.0593** | **1.6600e-003** | **0.0610** | | **227.7540** | **227.7540** | **6.7100e-003** | | **227.9217** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 4.1912 | 46.3998 | 30.8785 | 0.0620 | | 1.9853 | 1.9853 | | 1.8265 | 1.8265 | 0.0000 | 6,007.0434 | 6,007.0434 | 1.9428 | | 6,055.6134 |
| **Total** | **4.1912** | **46.3998** | **30.8785** | **0.0620** | **8.6733** | **1.9853** | **10.6587** | **3.5965** | **1.8265** | **5.4230** | **0.0000** | **6,007.0434** | **6,007.0434** | **1.9428** | | **6,055.6134** |

## 3.4 Grading - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0857 | 0.0589 | 0.8056 | 2.2900e-003 | 0.2236 | 1.8100e-003 | 0.2254 | 0.0593 | 1.6600e-003 | 0.0610 | | 227.7540 | 227.7540 | 6.7100e-003 | | 227.9217 |
| **Total** | **0.0857** | **0.0589** | **0.8056** | **2.2900e-003** | **0.2236** | **1.8100e-003** | **0.2254** | **0.0593** | **1.6600e-003** | **0.0610** | | **227.7540** | **227.7540** | **6.7100e-003** | | **227.9217** |

## 3.4 Grading - 2022

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.6248 | 38.8435 | 29.0415 | 0.0621 | | 1.6349 | 1.6349 | | 1.5041 | 1.5041 | | 6,011.4105 | 6,011.4105 | 1.9442 | | 6,060.0158 |
| **Total** | **3.6248** | **38.8435** | **29.0415** | **0.0621** | **8.6733** | **1.6349** | **10.3082** | **3.5965** | **1.5041** | **5.1006** | | **6,011.4105** | **6,011.4105** | **1.9442** | | **6,060.0158** |

## 3.4 Grading - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0803 | 0.0532 | 0.7432 | 2.2100e-003 | 0.2236 | 1.7500e-003 | 0.2253 | 0.0593 | 1.6100e-003 | 0.0609 | | 219.7425 | 219.7425 | 6.0600e-003 | | 219.8941 |
| **Total** | **0.0803** | **0.0532** | **0.7432** | **2.2100e-003** | **0.2236** | **1.7500e-003** | **0.2253** | **0.0593** | **1.6100e-003** | **0.0609** | | **219.7425** | **219.7425** | **6.0600e-003** | | **219.8941** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.6248 | 38.8435 | 29.0415 | 0.0621 | | 1.6349 | 1.6349 | | 1.5041 | 1.5041 | 0.0000 | 6,011.4105 | 6,011.4105 | 1.9442 | | 6,060.0158 |
| **Total** | **3.6248** | **38.8435** | **29.0415** | **0.0621** | **8.6733** | **1.6349** | **10.3082** | **3.5965** | **1.5041** | **5.1006** | **0.0000** | **6,011.4105** | **6,011.4105** | **1.9442** | | **6,060.0158** |

## 3.4 Grading - 2022

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0803 | 0.0532 | 0.7432 | 2.2100e-003 | 0.2236 | 1.7500e-003 | 0.2253 | 0.0593 | 1.6100e-003 | 0.0609 | | 219.7425 | 219.7425 | 6.0600e-003 | | 219.8941 |
| **Total** | **0.0803** | **0.0532** | **0.7432** | **2.2100e-003** | **0.2236** | **1.7500e-003** | **0.2253** | **0.0593** | **1.6100e-003** | **0.0609** | | **219.7425** | **219.7425** | **6.0600e-003** | | **219.8941** |

## 3.5 Building Construction - 2022

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.7062 | 15.6156 | 16.3634 | 0.0269 | | 0.8090 | 0.8090 | | 0.7612 | 0.7612 | | 2,554.3336 | 2,554.3336 | 0.6120 | | 2,569.6322 |
| **Total** | **1.7062** | **15.6156** | **16.3634** | **0.0269** | | **0.8090** | **0.8090** | | **0.7612** | **0.7612** | | **2,554.3336** | **2,554.3336** | **0.6120** | | **2,569.6322** |

## 3.5 Building Construction - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.4079 | 13.2032 | 3.4341 | 0.0364 | 0.9155 | 0.0248 | 0.9404 | 0.2636 | 0.0237 | 0.2873 | | 3,896.5482 | 3,896.5482 | 0.2236 | | 3,902.1384 |
| Worker | 3.2162 | 2.1318 | 29.7654 | 0.0883 | 8.9533 | 0.0701 | 9.0234 | 2.3745 | 0.0646 | 2.4390 | | 8,800.6857 | 8,800.6857 | 0.2429 | | 8,806.7582 |
| **Total** | **3.6242** | **15.3350** | **33.1995** | **0.1247** | **9.8688** | **0.0949** | **9.9637** | **2.6381** | **0.0883** | **2.7263** | | **12,697.2339** | **12,697.2339** | **0.4665** | | **12,708.8966** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.7062 | 15.6156 | 16.3634 | 0.0269 | | 0.8090 | 0.8090 | | 0.7612 | 0.7612 | 0.0000 | 2,554.3336 | 2,554.3336 | 0.6120 | | 2,569.6322 |
| **Total** | **1.7062** | **15.6156** | **16.3634** | **0.0269** | | **0.8090** | **0.8090** | | **0.7612** | **0.7612** | **0.0000** | **2,554.3336** | **2,554.3336** | **0.6120** | | **2,569.6322** |

## 3.5 Building Construction - 2022

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.4079 | 13.2032 | 3.4341 | 0.0364 | 0.9155 | 0.0248 | 0.9404 | 0.2636 | 0.0237 | 0.2873 | | 3,896.5482 | 3,896.5482 | 0.2236 | | 3,902.1384 |
| Worker | 3.2162 | 2.1318 | 29.7654 | 0.0883 | 8.9533 | 0.0701 | 9.0234 | 2.3745 | 0.0646 | 2.4390 | | 8,800.6857 | 8,800.6857 | 0.2429 | | 8,806.7582 |
| **Total** | **3.6242** | **15.3350** | **33.1995** | **0.1247** | **9.8688** | **0.0949** | **9.9637** | **2.6381** | **0.0883** | **2.7263** | | **12,697.2339** | **12,697.2339** | **0.4665** | | **12,708.8966** |

## 3.5 Building Construction - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.5728 | 14.3849 | 16.2440 | 0.0269 | | 0.6997 | 0.6997 | | 0.6584 | 0.6584 | | 2,555.2099 | 2,555.2099 | 0.6079 | | 2,570.4061 |
| **Total** | **1.5728** | **14.3849** | **16.2440** | **0.0269** | | **0.6997** | **0.6997** | | **0.6584** | **0.6584** | | **2,555.2099** | **2,555.2099** | **0.6079** | | **2,570.4061** |

## 3.5 Building Construction - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.3027 | 10.0181 | 3.1014 | 0.0352 | 0.9156 | 0.0116 | 0.9271 | 0.2636 | 0.0111 | 0.2747 | | 3,773.8762 | 3,773.8762 | 0.1982 | | 3,778.8300 |
| Worker | 3.0203 | 1.9287 | 27.4113 | 0.0851 | 8.9533 | 0.0681 | 9.0214 | 2.3745 | 0.0627 | 2.4372 | | 8,478.4408 | 8,478.4408 | 0.2190 | | 8,483.9160 |
| **Total** | **3.3229** | **11.9468** | **30.5127** | **0.1203** | **9.8688** | **0.0797** | **9.9485** | **2.6381** | **0.0738** | **2.7118** | | **12,252.3170** | **12,252.3170** | **0.4172** | | **12,262.7460** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.5728 | 14.3849 | 16.2440 | 0.0269 | | 0.6997 | 0.6997 | | 0.6584 | 0.6584 | 0.0000 | 2,555.2099 | 2,555.2099 | 0.6079 | | 2,570.4061 |
| **Total** | **1.5728** | **14.3849** | **16.2440** | **0.0269** | | **0.6997** | **0.6997** | | **0.6584** | **0.6584** | **0.0000** | **2,555.2099** | **2,555.2099** | **0.6079** | | **2,570.4061** |

## 3.5 Building Construction - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.3027 | 10.0181 | 3.1014 | 0.0352 | 0.9156 | 0.0116 | 0.9271 | 0.2636 | 0.0111 | 0.2747 | | 3,773.8762 | 3,773.8762 | 0.1982 | | 3,778.8300 |
| Worker | 3.0203 | 1.9287 | 27.4113 | 0.0851 | 8.9533 | 0.0681 | 9.0214 | 2.3745 | 0.0627 | 2.4372 | | 8,478.4408 | 8,478.4408 | 0.2190 | | 8,483.9160 |
| **Total** | **3.3229** | **11.9468** | **30.5127** | **0.1203** | **9.8688** | **0.0797** | **9.9485** | **2.6381** | **0.0738** | **2.7118** | | **12,252.3170** | **12,252.3170** | **0.4172** | | **12,262.7460** |

## 3.6 Paving - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.0327 | 10.1917 | 14.5842 | 0.0228 | | 0.5102 | 0.5102 | | 0.4694 | 0.4694 | | 2,207.5841 | 2,207.5841 | 0.7140 | | 2,225.4336 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **1.0327** | **10.1917** | **14.5842** | **0.0228** | | **0.5102** | **0.5102** | | **0.4694** | **0.4694** | | **2,207.5841** | **2,207.5841** | **0.7140** | | **2,225.4336** |

## 3.6 Paving - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0566 | 0.0361 | 0.5133 | 1.5900e-003 | 0.1677 | 1.2800e-003 | 0.1689 | 0.0445 | 1.1700e-003 | 0.0456 | | 158.7723 | 158.7723 | 4.1000e-003 | | 158.8748 |
| **Total** | **0.0566** | **0.0361** | **0.5133** | **1.5900e-003** | **0.1677** | **1.2800e-003** | **0.1689** | **0.0445** | **1.1700e-003** | **0.0456** | | **158.7723** | **158.7723** | **4.1000e-003** | | **158.8748** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.0327 | 10.1917 | 14.5842 | 0.0228 | | 0.5102 | 0.5102 | | 0.4694 | 0.4694 | 0.0000 | 2,207.5841 | 2,207.5841 | 0.7140 | | 2,225.4336 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **1.0327** | **10.1917** | **14.5842** | **0.0228** | | **0.5102** | **0.5102** | | **0.4694** | **0.4694** | **0.0000** | **2,207.5841** | **2,207.5841** | **0.7140** | | **2,225.4336** |

## 3.6 Paving - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0566 | 0.0361 | 0.5133 | 1.5900e-003 | 0.1677 | 1.2800e-003 | 0.1689 | 0.0445 | 1.1700e-003 | 0.0456 | | 158.7723 | 158.7723 | 4.1000e-003 | | 158.8748 |
| **Total** | **0.0566** | **0.0361** | **0.5133** | **1.5900e-003** | **0.1677** | **1.2800e-003** | **0.1689** | **0.0445** | **1.1700e-003** | **0.0456** | | **158.7723** | **158.7723** | **4.1000e-003** | | **158.8748** |

## 3.6 Paving - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 0.9882 | 9.5246 | 14.6258 | 0.0228 | | 0.4685 | 0.4685 | | 0.4310 | 0.4310 | | 2,207.5472 | 2,207.5472 | 0.7140 | | 2,225.3963 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **0.9882** | **9.5246** | **14.6258** | **0.0228** | | **0.4685** | **0.4685** | | **0.4310** | **0.4310** | | **2,207.5472** | **2,207.5472** | **0.7140** | | **2,225.3963** |

## 3.6 Paving - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0535 | 0.0329 | 0.4785 | 1.5400e-003 | 0.1677 | 1.2600e-003 | 0.1689 | 0.0445 | 1.1600e-003 | 0.0456 | | 153.8517 | 153.8517 | 3.7600e-003 | | 153.9458 |
| **Total** | **0.0535** | **0.0329** | **0.4785** | **1.5400e-003** | **0.1677** | **1.2600e-003** | **0.1689** | **0.0445** | **1.1600e-003** | **0.0456** | | **153.8517** | **153.8517** | **3.7600e-003** | | **153.9458** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 0.9882 | 9.5246 | 14.6258 | 0.0228 | | 0.4685 | 0.4685 | | 0.4310 | 0.4310 | 0.0000 | 2,207.5472 | 2,207.5472 | 0.7140 | | 2,225.3963 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **0.9882** | **9.5246** | **14.6258** | **0.0228** | | **0.4685** | **0.4685** | | **0.4310** | **0.4310** | **0.0000** | **2,207.5472** | **2,207.5472** | **0.7140** | | **2,225.3963** |

## 3.6 Paving - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0535 | 0.0329 | 0.4785 | 1.5400e-003 | 0.1677 | 1.2600e-003 | 0.1689 | 0.0445 | 1.1600e-003 | 0.0456 | | 153.8517 | 153.8517 | 3.7600e-003 | | 153.9458 |
| **Total** | **0.0535** | **0.0329** | **0.4785** | **1.5400e-003** | **0.1677** | **1.2600e-003** | **0.1689** | **0.0445** | **1.1600e-003** | **0.0456** | | **153.8517** | **153.8517** | **3.7600e-003** | | **153.9458** |

## 3.7 Architectural Coating - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Archit. Coating | 236.4115 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Off-Road | 0.1808 | 1.2188 | 1.8101 | 2.9700e-003 | | 0.0609 | 0.0609 | | 0.0609 | 0.0609 | | 281.4481 | 281.4481 | 0.0159 | | 281.8443 |
| **Total** | **236.5923** | **1.2188** | **1.8101** | **2.9700e-003** | | **0.0609** | **0.0609** | | **0.0609** | **0.0609** | | **281.4481** | **281.4481** | **0.0159** | | **281.8443** |

## 3.7 Architectural Coating - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.5707 | 0.3513 | 5.1044 | 0.0165 | 1.7884 | 0.0134 | 1.8018 | 0.4743 | 0.0123 | 0.4866 | | 1,641.0852 | 1,641.0852 | 0.0401 | | 1,642.0886 |
| **Total** | **0.5707** | **0.3513** | **5.1044** | **0.0165** | **1.7884** | **0.0134** | **1.8018** | **0.4743** | **0.0123** | **0.4866** | | **1,641.0852** | **1,641.0852** | **0.0401** | | **1,642.0886** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Archit. Coating | 236.4115 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Off-Road | 0.1808 | 1.2188 | 1.8101 | 2.9700e-003 | | 0.0609 | 0.0609 | | 0.0609 | 0.0609 | 0.0000 | 281.4481 | 281.4481 | 0.0159 | | 281.8443 |
| **Total** | **236.5923** | **1.2188** | **1.8101** | **2.9700e-003** | | **0.0609** | **0.0609** | | **0.0609** | **0.0609** | **0.0000** | **281.4481** | **281.4481** | **0.0159** | | **281.8443** |

### 3.7 Architectural Coating - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.5707 | 0.3513 | 5.1044 | 0.0165 | 1.7884 | 0.0134 | 1.8018 | 0.4743 | 0.0123 | 0.4866 | | 1,641.0852 | 1,641.0852 | 0.0401 | | 1,642.0886 |
| **Total** | **0.5707** | **0.3513** | **5.1044** | **0.0165** | **1.7884** | **0.0134** | **1.8018** | **0.4743** | **0.0123** | **0.4866** | | **1,641.0852** | **1,641.0852** | **0.0401** | | **1,642.0886** |

## 4.0 Operational Detail - Mobile

### 4.1 Mitigation Measures Mobile

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Mitigated | 9.8489 | 45.4304 | 114.8495 | 0.4917 | 45.9592 | 0.3360 | 46.2951 | 12.2950 | 0.3119 | 12.6070 | | 50,306.6034 | 50,306.6034 | 2.1807 | | 50,361.1208 |
| Unmitigated | 9.8489 | 45.4304 | 114.8495 | 0.4917 | 45.9592 | 0.3360 | 46.2951 | 12.2950 | 0.3119 | 12.6070 | | 50,306.6034 | 50,306.6034 | 2.1807 | | 50,361.1208 |

## 4.2 Trip Summary Information

| | Average Daily Trip Rate | | | Unmitigated | Mitigated |
|---|---|---|---|---|---|
| Land Use | Weekday | Saturday | Sunday | Annual VMT | Annual VMT |
| Apartments Low Rise | 145.75 | 154.25 | 154.00 | 506,227 | 506,227 |
| Apartments Mid Rise | 4,026.75 | 3,773.25 | 4075.50 | 13,660,065 | 13,660,065 |
| General Office Building | 288.45 | 62.55 | 31.05 | 706,812 | 706,812 |
| High Turnover (Sit Down Restaurant) | 2,368.80 | 2,873.52 | 2817.72 | 3,413,937 | 3,413,937 |
| Hotel | 192.00 | 187.50 | 160.00 | 445,703 | 445,703 |
| Quality Restaurant | 501.12 | 511.92 | 461.20 | 707,488 | 707,488 |
| Regional Shopping Center | 528.08 | 601.44 | 357.84 | 1,112,221 | 1,112,221 |
| Total | 8,050.95 | 8,164.43 | 8,057.31 | 20,552,452 | 20,552,452 |

## 4.3 Trip Type Information

| | Miles | | | Trip % | | | Trip Purpose % | | |
|---|---|---|---|---|---|---|---|---|---|
| Land Use | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted | Pass-by |
| Apartments Low Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| Apartments Mid Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| General Office Building | 16.60 | 8.40 | 6.90 | 33.00 | 48.00 | 19.00 | 77 | 19 | 4 |
| High Turnover (Sit Down | 16.60 | 8.40 | 6.90 | 8.50 | 72.50 | 19.00 | 37 | 20 | 43 |
| Hotel | 16.60 | 8.40 | 6.90 | 19.40 | 61.60 | 19.00 | 58 | 38 | 4 |
| Quality Restaurant | 16.60 | 8.40 | 6.90 | 12.00 | 69.00 | 19.00 | 38 | 18 | 44 |
| Regional Shopping Center | 16.60 | 8.40 | 6.90 | 16.30 | 64.70 | 19.00 | 54 | 35 | 11 |

### 4.4 Fleet Mix

| Land Use | LDA | LDT1 | LDT2 | MDV | LHD1 | LHD2 | MHD | HHD | OBUS | UBUS | MCY | SBUS | MH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Apartments Low Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Apartments Mid Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| General Office Building | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| High Turnover (Sit Down Restaurant) | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Hotel | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Quality Restaurant | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Regional Shopping Center | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |

## 5.0 Energy Detail

Historical Energy Use: N

### 5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| NaturalGas Mitigated | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| NaturalGas Unmitigated | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |

## 5.2 Energy by Land Use - NaturalGas

**Unmitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | lb/day | | | | | | | | | | lb/day | | | | | |
| Apartments Low Rise | 1119.16 | 0.0121 | 0.1031 | 0.0439 | 6.6000e-004 | | 8.3400e-003 | 8.3400e-003 | | 8.3400e-003 | 8.3400e-003 | | 131.6662 | 131.6662 | 2.5200e-003 | 2.4100e-003 | 132.4486 |
| Apartments Mid Rise | 35784.3 | 0.3859 | 3.2978 | 1.4033 | 0.0211 | | 0.2666 | 0.2666 | | 0.2666 | 0.2666 | | 4,209.9164 | 4,209.9164 | 0.0807 | 0.0772 | 4,234.9339 |
| General Office Building | 1283.42 | 0.0138 | 0.1258 | 0.1057 | 7.5000e-004 | | 9.5600e-003 | 9.5600e-003 | | 9.5600e-003 | 9.5600e-003 | | 150.9911 | 150.9911 | 2.8900e-003 | 2.7700e-003 | 151.8884 |
| High Turnover (Sit Down Restaurant) | 22759.9 | 0.2455 | 2.2314 | 1.8743 | 0.0134 | | 0.1696 | 0.1696 | | 0.1696 | 0.1696 | | 2,677.6342 | 2,677.6342 | 0.0513 | 0.0491 | 2,693.5460 |
| Hotel | 4769.72 | 0.0514 | 0.4676 | 0.3928 | 2.8100e-003 | | 0.0355 | 0.0355 | | 0.0355 | 0.0355 | | 561.1436 | 561.1436 | 0.0108 | 0.0103 | 564.4782 |
| Quality Restaurant | 5057.75 | 0.0545 | 0.4959 | 0.4165 | 2.9800e-003 | | 0.0377 | 0.0377 | | 0.0377 | 0.0377 | | 595.0298 | 595.0298 | 0.0114 | 0.0109 | 598.5658 |
| Regional Shopping Center | 251.616 | 2.7100e-003 | 0.0247 | 0.0207 | 1.5000e-004 | | 1.8700e-003 | 1.8700e-003 | | 1.8700e-003 | 1.8700e-003 | | 29.6019 | 29.6019 | 5.7000e-004 | 5.4000e-004 | 29.7778 |
| **Total** | | **0.7660** | **6.7463** | **4.2573** | **0.0418** | | **0.5292** | **0.5292** | | **0.5292** | **0.5292** | | **8,355.9832** | **8,355.9832** | **0.1602** | **0.1532** | **8,405.6387** |

## 5.2 Energy by Land Use - NaturalGas

**Mitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | lb/day | | | | | | | | | | lb/day | | | | | |
| Apartments Low Rise | 1.11916 | 0.0121 | 0.1031 | 0.0439 | 6.6000e-004 | | 8.3400e-003 | 8.3400e-003 | | 8.3400e-003 | 8.3400e-003 | | 131.6662 | 131.6662 | 2.5200e-003 | 2.4100e-003 | 132.4486 |
| Apartments Mid Rise | 35.7843 | 0.3859 | 3.2978 | 1.4033 | 0.0211 | | 0.2666 | 0.2666 | | 0.2666 | 0.2666 | | 4,209.9164 | 4,209.9164 | 0.0807 | 0.0772 | 4,234.9339 |
| General Office Building | 1.28342 | 0.0138 | 0.1258 | 0.1057 | 7.5000e-004 | | 9.5600e-003 | 9.5600e-003 | | 9.5600e-003 | 9.5600e-003 | | 150.9911 | 150.9911 | 2.8900e-003 | 2.7700e-003 | 151.8884 |
| High Turnover (Sit Down Restaurant) | 22.7599 | 0.2455 | 2.2314 | 1.8743 | 0.0134 | | 0.1696 | 0.1696 | | 0.1696 | 0.1696 | | 2,677.6342 | 2,677.6342 | 0.0513 | 0.0491 | 2,693.5460 |
| Hotel | 4.76972 | 0.0514 | 0.4676 | 0.3928 | 2.8100e-003 | | 0.0355 | 0.0355 | | 0.0355 | 0.0355 | | 561.1436 | 561.1436 | 0.0108 | 0.0103 | 564.4782 |
| Quality Restaurant | 5.05775 | 0.0545 | 0.4959 | 0.4165 | 2.9800e-003 | | 0.0377 | 0.0377 | | 0.0377 | 0.0377 | | 595.0298 | 595.0298 | 0.0114 | 0.0109 | 598.5658 |
| Regional Shopping Center | 0.251616 | 2.7100e-003 | 0.0247 | 0.0207 | 1.5000e-004 | | 1.8700e-003 | 1.8700e-003 | | 1.8700e-003 | 1.8700e-003 | | 29.6019 | 29.6019 | 5.7000e-004 | 5.4000e-004 | 29.7778 |
| **Total** | | **0.7660** | **6.7463** | **4.2573** | **0.0418** | | **0.5292** | **0.5292** | | **0.5292** | **0.5292** | | **8,355.9832** | **8,355.9832** | **0.1602** | **0.1532** | **8,405.6387** |

# 6.0 Area Detail

## 6.1 Mitigation Measures Area

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Mitigated | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Unmitigated | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |

## 6.2 Area by SubCategory

**Unmitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | lb/day | | | | | | | | | | lb/day | | | | | |
| Architectural Coating | 2.2670 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Consumer Products | 24.1085 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Hearth | 1.6500 | 14.1000 | 6.0000 | 0.0900 | | 1.1400 | 1.1400 | | 1.1400 | 1.1400 | 0.0000 | 18,000.0000 | 18,000.0000 | 0.3450 | 0.3300 | 18,106.9650 |
| Landscaping | 2.4766 | 0.9496 | 82.4430 | 4.3600e-003 | | 0.4574 | 0.4574 | | 0.4574 | 0.4574 | | 148.5950 | 148.5950 | 0.1424 | | 152.1542 |
| **Total** | **30.5020** | **15.0496** | **88.4430** | **0.0944** | | **1.5974** | **1.5974** | | **1.5974** | **1.5974** | **0.0000** | **18,148.5950** | **18,148.5950** | **0.4874** | **0.3300** | **18,259.1192** |

### 6.2 Area by SubCategory

**Mitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | lb/day | | | | | | | | | | lb/day | | | | | |
| Architectural Coating | 2.2670 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Consumer Products | 24.1085 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Hearth | 1.6500 | 14.1000 | 6.0000 | 0.0900 | | 1.1400 | 1.1400 | | 1.1400 | 1.1400 | 0.0000 | 18,000.0000 | 18,000.0000 | 0.3450 | 0.3300 | 18,106.9650 |
| Landscaping | 2.4766 | 0.9496 | 82.4430 | 4.3600e-003 | | 0.4574 | 0.4574 | | 0.4574 | 0.4574 | | 148.5950 | 148.5950 | 0.1424 | | 152.1542 |
| **Total** | **30.5020** | **15.0496** | **88.4430** | **0.0944** | | **1.5974** | **1.5974** | | **1.5974** | **1.5974** | **0.0000** | **18,148.5950** | **18,148.5950** | **0.4874** | **0.3300** | **18,259.1192** |

## 7.0 Water Detail

### 7.1 Mitigation Measures Water

## 8.0 Waste Detail

### 8.1 Mitigation Measures Waste

## 9.0 Operational Offroad

| Equipment Type | Number | Hours/Day | Days/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

## 10.0 Stationary Equipment

**Fire Pumps and Emergency Generators**

| Equipment Type | Number | Hours/Day | Hours/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

**Boilers**

| Equipment Type | Number | Heat Input/Day | Heat Input/Year | Boiler Rating | Fuel Type |
|---|---|---|---|---|---|

**User Defined Equipment**

| Equipment Type | Number |
|---|---|

## 11.0 Vegetation

# Village South Specific Plan (Proposed)

**Los Angeles-South Coast County, Winter**

## 1.0 Project Characteristics

### 1.1 Land Usage

| Land Uses | Size | Metric | Lot Acreage | Floor Surface Area | Population |
|---|---|---|---|---|---|
| General Office Building | 45.00 | 1000sqft | 1.03 | 45,000.00 | 0 |
| High Turnover (Sit Down Restaurant) | 36.00 | 1000sqft | 0.83 | 36,000.00 | 0 |
| Hotel | 50.00 | Room | 1.67 | 72,600.00 | 0 |
| Quality Restaurant | 8.00 | 1000sqft | 0.18 | 8,000.00 | 0 |
| Apartments Low Rise | 25.00 | Dwelling Unit | 1.56 | 25,000.00 | 72 |
| Apartments Mid Rise | 975.00 | Dwelling Unit | 25.66 | 975,000.00 | 2789 |
| Regional Shopping Center | 56.00 | 1000sqft | 1.29 | 56,000.00 | 0 |

### 1.2 Other Project Characteristics

| | | | | | |
|---|---|---|---|---|---|
| **Urbanization** | Urban | **Wind Speed (m/s)** | 2.2 | **Precipitation Freq (Days)** | 33 |
| **Climate Zone** | 9 | | | **Operational Year** | 2028 |
| **Utility Company** | Southern California Edison | | | | |
| **CO2 Intensity (lb/MWhr)** | 702.44 | **CH4 Intensity (lb/MWhr)** | 0.029 | **N2O Intensity (lb/MWhr)** | 0.006 |

### 1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

| Table Name | Column Name | Default Value | New Value |
|---|---|---|---|
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | NumberWood | 1.25 | 0.00 |
| tblFireplaces | NumberWood | 48.75 | 0.00 |
| tblVehicleTrips | ST_TR | 7.16 | 6.17 |
| tblVehicleTrips | ST_TR | 6.39 | 3.87 |
| tblVehicleTrips | ST_TR | 2.46 | 1.39 |
| tblVehicleTrips | ST_TR | 158.37 | 79.82 |
| tblVehicleTrips | ST_TR | 8.19 | 3.75 |
| tblVehicleTrips | ST_TR | 94.36 | 63.99 |
| tblVehicleTrips | ST_TR | 49.97 | 10.74 |
| tblVehicleTrips | SU_TR | 6.07 | 6.16 |
| tblVehicleTrips | SU_TR | 5.86 | 4.18 |
| tblVehicleTrips | SU_TR | 1.05 | 0.69 |
| tblVehicleTrips | SU_TR | 131.84 | 78.27 |

| | | | |
|---|---|---|---|
| tblVehicleTrips | SU_TR | 5.95 | 3.20 |
| tblVehicleTrips | SU_TR | 72.16 | 57.65 |
| tblVehicleTrips | SU_TR | 25.24 | 6.39 |
| tblVehicleTrips | WD_TR | 6.59 | 5.83 |
| tblVehicleTrips | WD_TR | 6.65 | 4.13 |
| tblVehicleTrips | WD_TR | 11.03 | 6.41 |
| tblVehicleTrips | WD_TR | 127.15 | 65.80 |
| tblVehicleTrips | WD_TR | 8.17 | 3.84 |
| tblVehicleTrips | WD_TR | 89.95 | 62.64 |
| tblVehicleTrips | WD_TR | 42.70 | 9.43 |
| tblWoodstoves | NumberCatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberCatalytic | 48.75 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 48.75 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |

## 2.0 Emissions Summary

## 2.1 Overall Construction (Maximum Daily Emission)

**Unmitigated Construction**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | lb/day | | | | | | | | | | lb/day | | | | | |
| 2021 | 4.2865 | 46.4651 | 31.6150 | 0.0642 | 18.2675 | 2.0461 | 20.3135 | 9.9840 | 1.8824 | 11.8664 | 0.0000 | 6,221.4937 | 6,221.4937 | 1.9491 | 0.0000 | 6,270.2214 |
| 2022 | 5.7218 | 38.9024 | 47.3319 | 0.1455 | 9.8688 | 1.6366 | 10.7736 | 3.6558 | 1.5057 | 5.1615 | 0.0000 | 14,630.3099 | 14,630.3099 | 1.9499 | 0.0000 | 14,657.2663 |
| 2023 | 5.2705 | 26.4914 | 44.5936 | 0.1413 | 9.8688 | 0.7800 | 10.6488 | 2.6381 | 0.7328 | 3.3708 | 0.0000 | 14,210.3424 | 14,210.3424 | 1.0230 | 0.0000 | 14,235.9160 |
| 2024 | 237.2328 | 9.5610 | 15.0611 | 0.0243 | 1.7884 | 0.4698 | 1.8628 | 0.4743 | 0.4322 | 0.5476 | 0.0000 | 2,352.4178 | 2,352.4178 | 0.7175 | 0.0000 | 2,370.3550 |
| **Maximum** | **237.2328** | **46.4651** | **47.3319** | **0.1455** | **18.2675** | **2.0461** | **20.3135** | **9.9840** | **1.8824** | **11.8664** | **0.0000** | **14,630.3099** | **14,630.3099** | **1.9499** | **0.0000** | **14,657.2663** |

## 2.1 Overall Construction (Maximum Daily Emission)

**Mitigated Construction**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | lb/day | | | | | | | | | | lb/day | | | | | |
| 2021 | 4.2865 | 46.4651 | 31.6150 | 0.0642 | 18.2675 | 2.0461 | 20.3135 | 9.9840 | 1.8824 | 11.8664 | 0.0000 | 6,221.4937 | 6,221.4937 | 1.9491 | 0.0000 | 6,270.2214 |
| 2022 | 5.7218 | 38.9024 | 47.3319 | 0.1455 | 9.8688 | 1.6366 | 10.7736 | 3.6558 | 1.5057 | 5.1615 | 0.0000 | 14,630.3099 | 14,630.3099 | 1.9499 | 0.0000 | 14,657.2663 |
| 2023 | 5.2705 | 26.4914 | 44.5936 | 0.1413 | 9.8688 | 0.7800 | 10.6488 | 2.6381 | 0.7328 | 3.3708 | 0.0000 | 14,210.3424 | 14,210.3424 | 1.0230 | 0.0000 | 14,235.9160 |
| 2024 | 237.2328 | 9.5610 | 15.0611 | 0.0243 | 1.7884 | 0.4698 | 1.8628 | 0.4743 | 0.4322 | 0.5476 | 0.0000 | 2,352.4178 | 2,352.4178 | 0.7175 | 0.0000 | 2,370.3550 |
| **Maximum** | **237.2328** | **46.4651** | **47.3319** | **0.1455** | **18.2675** | **2.0461** | **20.3135** | **9.9840** | **1.8824** | **11.8664** | **0.0000** | **14,630.3099** | **14,630.3099** | **1.9499** | **0.0000** | **14,657.2663** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Percent Reduction** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** |

## 2.2 Overall Operational

### Unmitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Area | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Energy | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| Mobile | 9.5233 | 45.9914 | 110.0422 | 0.4681 | 45.9592 | 0.3373 | 46.2965 | 12.2950 | 0.3132 | 12.6083 | | 47,917.8005 | 47,917.8005 | 2.1953 | | 47,972.6839 |
| **Total** | **40.7912** | **67.7872** | **202.7424** | **0.6043** | **45.9592** | **2.4640** | **48.4231** | **12.2950** | **2.4399** | **14.7349** | **0.0000** | **74,422.3787** | **74,422.3787** | **2.8429** | **0.4832** | **74,637.4417** |

### Mitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Area | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Energy | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| Mobile | 9.5233 | 45.9914 | 110.0422 | 0.4681 | 45.9592 | 0.3373 | 46.2965 | 12.2950 | 0.3132 | 12.6083 | | 47,917.8005 | 47,917.8005 | 2.1953 | | 47,972.6839 |
| **Total** | **40.7912** | **67.7872** | **202.7424** | **0.6043** | **45.9592** | **2.4640** | **48.4231** | **12.2950** | **2.4399** | **14.7349** | **0.0000** | **74,422.3787** | **74,422.3787** | **2.8429** | **0.4832** | **74,637.4417** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Percent Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

## 3.0 Construction Detail

**Construction Phase**

| Phase Number | Phase Name | Phase Type | Start Date | End Date | Num Days Week | Num Days | Phase Description |
|---|---|---|---|---|---|---|---|
| 1 | Demolition | Demolition | 9/1/2021 | 10/12/2021 | 5 | 30 | |
| 2 | Site Preparation | Site Preparation | 10/13/2021 | 11/9/2021 | 5 | 20 | |
| 3 | Grading | Grading | 11/10/2021 | 1/11/2022 | 5 | 45 | |
| 4 | Building Construction | Building Construction | 1/12/2022 | 12/12/2023 | 5 | 500 | |
| 5 | Paving | Paving | 12/13/2023 | 1/30/2024 | 5 | 35 | |
| 6 | Architectural Coating | Architectural Coating | 1/31/2024 | 3/19/2024 | 5 | 35 | |

**Acres of Grading (Site Preparation Phase): 0**

**Acres of Grading (Grading Phase): 112.5**

**Acres of Paving: 0**

**Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)**

**OffRoad Equipment**

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

| Phase Name | Offroad Equipment Type | Amount | Usage Hours | Horse Power | Load Factor |
|---|---|---|---|---|---|
| Demolition | Concrete/Industrial Saws | 1 | 8.00 | 81 | 0.73 |
| Demolition | Excavators | 3 | 8.00 | 158 | 0.38 |
| Demolition | Rubber Tired Dozers | 2 | 8.00 | 247 | 0.40 |
| Site Preparation | Rubber Tired Dozers | 3 | 8.00 | 247 | 0.40 |
| Site Preparation | Tractors/Loaders/Backhoes | 4 | 8.00 | 97 | 0.37 |
| Grading | Excavators | 2 | 8.00 | 158 | 0.38 |
| Grading | Graders | 1 | 8.00 | 187 | 0.41 |
| Grading | Rubber Tired Dozers | 1 | 8.00 | 247 | 0.40 |
| Grading | Scrapers | 2 | 8.00 | 367 | 0.48 |
| Grading | Tractors/Loaders/Backhoes | 2 | 8.00 | 97 | 0.37 |
| Building Construction | Cranes | 1 | 7.00 | 231 | 0.29 |
| Building Construction | Forklifts | 3 | 8.00 | 89 | 0.20 |
| Building Construction | Generator Sets | 1 | 8.00 | 84 | 0.74 |
| Building Construction | Tractors/Loaders/Backhoes | 3 | 7.00 | 97 | 0.37 |
| Building Construction | Welders | 1 | 8.00 | 46 | 0.45 |
| Paving | Pavers | 2 | 8.00 | 130 | 0.42 |
| Paving | Paving Equipment | 2 | 8.00 | 132 | 0.36 |
| Paving | Rollers | 2 | 8.00 | 80 | 0.38 |
| Architectural Coating | Air Compressors | 1 | 6.00 | 78 | 0.48 |

**Trips and VMT**

| Phase Name | Offroad Equipment Count | Worker Trip Number | Vendor Trip Number | Hauling Trip Number | Worker Trip Length | Vendor Trip Length | Hauling Trip Length | Worker Vehicle Class | Vendor Vehicle Class | Hauling Vehicle Class |
|---|---|---|---|---|---|---|---|---|---|---|
| Demolition | 6 | 15.00 | 0.00 | 458.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Site Preparation | 7 | 18.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Grading | 8 | 20.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Building Construction | 9 | 801.00 | 143.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Paving | 6 | 15.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Architectural Coating | 1 | 160.00 | 0.00 | 0.00 | 14.70 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |

## 3.1 Mitigation Measures Construction

## 3.2 Demolition - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 3.3074 | 0.0000 | 3.3074 | 0.5008 | 0.0000 | 0.5008 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.1651 | 31.4407 | 21.5650 | 0.0388 | | 1.5513 | 1.5513 | | 1.4411 | 1.4411 | | 3,747.9449 | 3,747.9449 | 1.0549 | | 3,774.3174 |
| **Total** | **3.1651** | **31.4407** | **21.5650** | **0.0388** | **3.3074** | **1.5513** | **4.8588** | **0.5008** | **1.4411** | **1.9419** | | **3,747.9449** | **3,747.9449** | **1.0549** | | **3,774.3174** |

## 3.2 Demolition - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.1304 | 4.1454 | 1.0182 | 0.0117 | 0.2669 | 0.0128 | 0.2797 | 0.0732 | 0.0122 | 0.0854 | | 1,269.8555 | 1,269.8555 | 0.0908 | | 1,272.1252 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0715 | 0.0489 | 0.5524 | 1.6100e-003 | 0.1677 | 1.3500e-003 | 0.1690 | 0.0445 | 1.2500e-003 | 0.0457 | | 160.8377 | 160.8377 | 4.7300e-003 | | 160.9560 |
| **Total** | **0.2019** | **4.1943** | **1.5706** | **0.0133** | **0.4346** | **0.0141** | **0.4487** | **0.1176** | **0.0135** | **0.1311** | | **1,430.6932** | **1,430.6932** | **0.0955** | | **1,433.0812** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 3.3074 | 0.0000 | 3.3074 | 0.5008 | 0.0000 | 0.5008 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.1651 | 31.4407 | 21.5650 | 0.0388 | | 1.5513 | 1.5513 | | 1.4411 | 1.4411 | 0.0000 | 3,747.9449 | 3,747.9449 | 1.0549 | | 3,774.3174 |
| **Total** | **3.1651** | **31.4407** | **21.5650** | **0.0388** | **3.3074** | **1.5513** | **4.8588** | **0.5008** | **1.4411** | **1.9419** | **0.0000** | **3,747.9449** | **3,747.9449** | **1.0549** | | **3,774.3174** |

## 3.2 Demolition - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.1304 | 4.1454 | 1.0182 | 0.0117 | 0.2669 | 0.0128 | 0.2797 | 0.0732 | 0.0122 | 0.0854 | | 1,269.8555 | 1,269.8555 | 0.0908 | | 1,272.1252 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0715 | 0.0489 | 0.5524 | 1.6100e-003 | 0.1677 | 1.3500e-003 | 0.1690 | 0.0445 | 1.2500e-003 | 0.0457 | | 160.8377 | 160.8377 | 4.7300e-003 | | 160.9560 |
| **Total** | **0.2019** | **4.1943** | **1.5706** | **0.0133** | **0.4346** | **0.0141** | **0.4487** | **0.1176** | **0.0135** | **0.1311** | | **1,430.6932** | **1,430.6932** | **0.0955** | | **1,433.0812** |

## 3.3 Site Preparation - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 18.0663 | 0.0000 | 18.0663 | 9.9307 | 0.0000 | 9.9307 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.8882 | 40.4971 | 21.1543 | 0.0380 | | 2.0445 | 2.0445 | | 1.8809 | 1.8809 | | 3,685.6569 | 3,685.6569 | 1.1920 | | 3,715.4573 |
| **Total** | **3.8882** | **40.4971** | **21.1543** | **0.0380** | **18.0663** | **2.0445** | **20.1107** | **9.9307** | **1.8809** | **11.8116** | | **3,685.6569** | **3,685.6569** | **1.1920** | | **3,715.4573** |

## 3.3 Site Preparation - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0858 | 0.0587 | 0.6629 | 1.9400e-003 | 0.2012 | 1.6300e-003 | 0.2028 | 0.0534 | 1.5000e-003 | 0.0549 | | 193.0052 | 193.0052 | 5.6800e-003 | | 193.1472 |
| **Total** | **0.0858** | **0.0587** | **0.6629** | **1.9400e-003** | **0.2012** | **1.6300e-003** | **0.2028** | **0.0534** | **1.5000e-003** | **0.0549** | | **193.0052** | **193.0052** | **5.6800e-003** | | **193.1472** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 18.0663 | 0.0000 | 18.0663 | 9.9307 | 0.0000 | 9.9307 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.8882 | 40.4971 | 21.1543 | 0.0380 | | 2.0445 | 2.0445 | | 1.8809 | 1.8809 | 0.0000 | 3,685.6569 | 3,685.6569 | 1.1920 | | 3,715.4573 |
| **Total** | **3.8882** | **40.4971** | **21.1543** | **0.0380** | **18.0663** | **2.0445** | **20.1107** | **9.9307** | **1.8809** | **11.8116** | **0.0000** | **3,685.6569** | **3,685.6569** | **1.1920** | | **3,715.4573** |

## 3.3 Site Preparation - 2021

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0858 | 0.0587 | 0.6629 | 1.9400e-003 | 0.2012 | 1.6300e-003 | 0.2028 | 0.0534 | 1.5000e-003 | 0.0549 | | 193.0052 | 193.0052 | 5.6800e-003 | | 193.1472 |
| **Total** | **0.0858** | **0.0587** | **0.6629** | **1.9400e-003** | **0.2012** | **1.6300e-003** | **0.2028** | **0.0534** | **1.5000e-003** | **0.0549** | | **193.0052** | **193.0052** | **5.6800e-003** | | **193.1472** |

## 3.4 Grading - 2021

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 4.1912 | 46.3998 | 30.8785 | 0.0620 | | 1.9853 | 1.9853 | | 1.8265 | 1.8265 | | 6,007.0434 | 6,007.0434 | 1.9428 | | 6,055.6134 |
| **Total** | **4.1912** | **46.3998** | **30.8785** | **0.0620** | **8.6733** | **1.9853** | **10.6587** | **3.5965** | **1.8265** | **5.4230** | | **6,007.0434** | **6,007.0434** | **1.9428** | | **6,055.6134** |

## 3.4 Grading - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0954 | 0.0652 | 0.7365 | 2.1500e-003 | 0.2236 | 1.8100e-003 | 0.2254 | 0.0593 | 1.6600e-003 | 0.0610 | | 214.4502 | 214.4502 | 6.3100e-003 | | 214.6080 |
| **Total** | **0.0954** | **0.0652** | **0.7365** | **2.1500e-003** | **0.2236** | **1.8100e-003** | **0.2254** | **0.0593** | **1.6600e-003** | **0.0610** | | **214.4502** | **214.4502** | **6.3100e-003** | | **214.6080** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 4.1912 | 46.3998 | 30.8785 | 0.0620 | | 1.9853 | 1.9853 | | 1.8265 | 1.8265 | 0.0000 | 6,007.0434 | 6,007.0434 | 1.9428 | | 6,055.6134 |
| **Total** | **4.1912** | **46.3998** | **30.8785** | **0.0620** | **8.6733** | **1.9853** | **10.6587** | **3.5965** | **1.8265** | **5.4230** | **0.0000** | **6,007.0434** | **6,007.0434** | **1.9428** | | **6,055.6134** |

## 3.4 Grading - 2021

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0954 | 0.0652 | 0.7365 | 2.1500e-003 | 0.2236 | 1.8100e-003 | 0.2254 | 0.0593 | 1.6600e-003 | 0.0610 | | 214.4502 | 214.4502 | 6.3100e-003 | | 214.6080 |
| **Total** | **0.0954** | **0.0652** | **0.7365** | **2.1500e-003** | **0.2236** | **1.8100e-003** | **0.2254** | **0.0593** | **1.6600e-003** | **0.0610** | | **214.4502** | **214.4502** | **6.3100e-003** | | **214.6080** |

## 3.4 Grading - 2022

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.6248 | 38.8435 | 29.0415 | 0.0621 | | 1.6349 | 1.6349 | | 1.5041 | 1.5041 | | 6,011.4105 | 6,011.4105 | 1.9442 | | 6,060.0158 |
| **Total** | **3.6248** | **38.8435** | **29.0415** | **0.0621** | **8.6733** | **1.6349** | **10.3082** | **3.5965** | **1.5041** | **5.1006** | | **6,011.4105** | **6,011.4105** | **1.9442** | | **6,060.0158** |

## 3.4 Grading - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0896 | 0.0589 | 0.6784 | 2.0800e-003 | 0.2236 | 1.7500e-003 | 0.2253 | 0.0593 | 1.6100e-003 | 0.0609 | | 206.9139 | 206.9139 | 5.7000e-003 | | 207.0563 |
| **Total** | **0.0896** | **0.0589** | **0.6784** | **2.0800e-003** | **0.2236** | **1.7500e-003** | **0.2253** | **0.0593** | **1.6100e-003** | **0.0609** | | **206.9139** | **206.9139** | **5.7000e-003** | | **207.0563** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.6248 | 38.8435 | 29.0415 | 0.0621 | | 1.6349 | 1.6349 | | 1.5041 | 1.5041 | 0.0000 | 6,011.4105 | 6,011.4105 | 1.9442 | | 6,060.0158 |
| **Total** | **3.6248** | **38.8435** | **29.0415** | **0.0621** | **8.6733** | **1.6349** | **10.3082** | **3.5965** | **1.5041** | **5.1006** | **0.0000** | **6,011.4105** | **6,011.4105** | **1.9442** | | **6,060.0158** |

## 3.4 Grading - 2022

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0896 | 0.0589 | 0.6784 | 2.0800e-003 | 0.2236 | 1.7500e-003 | 0.2253 | 0.0593 | 1.6100e-003 | 0.0609 | | 206.9139 | 206.9139 | 5.7000e-003 | | 207.0563 |
| **Total** | **0.0896** | **0.0589** | **0.6784** | **2.0800e-003** | **0.2236** | **1.7500e-003** | **0.2253** | **0.0593** | **1.6100e-003** | **0.0609** | | **206.9139** | **206.9139** | **5.7000e-003** | | **207.0563** |

## 3.5 Building Construction - 2022

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.7062 | 15.6156 | 16.3634 | 0.0269 | | 0.8090 | 0.8090 | | 0.7612 | 0.7612 | | 2,554.3336 | 2,554.3336 | 0.6120 | | 2,569.6322 |
| **Total** | **1.7062** | **15.6156** | **16.3634** | **0.0269** | | **0.8090** | **0.8090** | | **0.7612** | **0.7612** | | **2,554.3336** | **2,554.3336** | **0.6120** | | **2,569.6322** |

## 3.5 Building Construction - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.4284 | 13.1673 | 3.8005 | 0.0354 | 0.9155 | 0.0256 | 0.9412 | 0.2636 | 0.0245 | 0.2881 | | 3,789.0750 | 3,789.0750 | 0.2381 | | 3,795.0283 |
| Worker | 3.5872 | 2.3593 | 27.1680 | 0.0832 | 8.9533 | 0.0701 | 9.0234 | 2.3745 | 0.0646 | 2.4390 | | 8,286.9013 | 8,286.9013 | 0.2282 | | 8,292.6058 |
| **Total** | **4.0156** | **15.5266** | **30.9685** | **0.1186** | **9.8688** | **0.0957** | **9.9645** | **2.6381** | **0.0891** | **2.7271** | | **12,075.9763** | **12,075.9763** | **0.4663** | | **12,087.6341** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.7062 | 15.6156 | 16.3634 | 0.0269 | | 0.8090 | 0.8090 | | 0.7612 | 0.7612 | 0.0000 | 2,554.3336 | 2,554.3336 | 0.6120 | | 2,569.6322 |
| **Total** | **1.7062** | **15.6156** | **16.3634** | **0.0269** | | **0.8090** | **0.8090** | | **0.7612** | **0.7612** | **0.0000** | **2,554.3336** | **2,554.3336** | **0.6120** | | **2,569.6322** |

## 3.5 Building Construction - 2022

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.4284 | 13.1673 | 3.8005 | 0.0354 | 0.9155 | 0.0256 | 0.9412 | 0.2636 | 0.0245 | 0.2881 | | 3,789.0750 | 3,789.0750 | 0.2381 | | 3,795.0283 |
| Worker | 3.5872 | 2.3593 | 27.1680 | 0.0832 | 8.9533 | 0.0701 | 9.0234 | 2.3745 | 0.0646 | 2.4390 | | 8,286.9013 | 8,286.9013 | 0.2282 | | 8,292.6058 |
| **Total** | **4.0156** | **15.5266** | **30.9685** | **0.1186** | **9.8688** | **0.0957** | **9.9645** | **2.6381** | **0.0891** | **2.7271** | | **12,075.9763** | **12,075.9763** | **0.4663** | | **12,087.6341** |

## 3.5 Building Construction - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.5728 | 14.3849 | 16.2440 | 0.0269 | | 0.6997 | 0.6997 | | 0.6584 | 0.6584 | | 2,555.2099 | 2,555.2099 | 0.6079 | | 2,570.4061 |
| **Total** | **1.5728** | **14.3849** | **16.2440** | **0.0269** | | **0.6997** | **0.6997** | | **0.6584** | **0.6584** | | **2,555.2099** | **2,555.2099** | **0.6079** | | **2,570.4061** |

## 3.5 Building Construction - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.3183 | 9.9726 | 3.3771 | 0.0343 | 0.9156 | 0.0122 | 0.9277 | 0.2636 | 0.0116 | 0.2752 | | 3,671.4007 | 3,671.4007 | 0.2096 | | 3,676.6417 |
| Worker | 3.3795 | 2.1338 | 24.9725 | 0.0801 | 8.9533 | 0.0681 | 9.0214 | 2.3745 | 0.0627 | 2.4372 | | 7,983.7318 | 7,983.7318 | 0.2055 | | 7,988.8683 |
| **Total** | **3.6978** | **12.1065** | **28.3496** | **0.1144** | **9.8688** | **0.0803** | **9.9491** | **2.6381** | **0.0743** | **2.7124** | | **11,655.1325** | **11,655.1325** | **0.4151** | | **11,665.5099** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.5728 | 14.3849 | 16.2440 | 0.0269 | | 0.6997 | 0.6997 | | 0.6584 | 0.6584 | 0.0000 | 2,555.2099 | 2,555.2099 | 0.6079 | | 2,570.4061 |
| **Total** | **1.5728** | **14.3849** | **16.2440** | **0.0269** | | **0.6997** | **0.6997** | | **0.6584** | **0.6584** | **0.0000** | **2,555.2099** | **2,555.2099** | **0.6079** | | **2,570.4061** |

## 3.5 Building Construction - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.3183 | 9.9726 | 3.3771 | 0.0343 | 0.9156 | 0.0122 | 0.9277 | 0.2636 | 0.0116 | 0.2752 | | 3,671.4007 | 3,671.4007 | 0.2096 | | 3,676.6417 |
| Worker | 3.3795 | 2.1338 | 24.9725 | 0.0801 | 8.9533 | 0.0681 | 9.0214 | 2.3745 | 0.0627 | 2.4372 | | 7,983.7318 | 7,983.7318 | 0.2055 | | 7,988.8683 |
| **Total** | **3.6978** | **12.1065** | **28.3496** | **0.1144** | **9.8688** | **0.0803** | **9.9491** | **2.6381** | **0.0743** | **2.7124** | | **11,655.1325** | **11,655.1325** | **0.4151** | | **11,665.5099** |

## 3.6 Paving - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.0327 | 10.1917 | 14.5842 | 0.0228 | | 0.5102 | 0.5102 | | 0.4694 | 0.4694 | | 2,207.5841 | 2,207.5841 | 0.7140 | | 2,225.4336 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **1.0327** | **10.1917** | **14.5842** | **0.0228** | | **0.5102** | **0.5102** | | **0.4694** | **0.4694** | | **2,207.5841** | **2,207.5841** | **0.7140** | | **2,225.4336** |

## 3.6 Paving - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0633 | 0.0400 | 0.4677 | 1.5000e-003 | 0.1677 | 1.2800e-003 | 0.1689 | 0.0445 | 1.1700e-003 | 0.0456 | | 149.5081 | 149.5081 | 3.8500e-003 | | 149.6043 |
| **Total** | **0.0633** | **0.0400** | **0.4677** | **1.5000e-003** | **0.1677** | **1.2800e-003** | **0.1689** | **0.0445** | **1.1700e-003** | **0.0456** | | **149.5081** | **149.5081** | **3.8500e-003** | | **149.6043** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.0327 | 10.1917 | 14.5842 | 0.0228 | | 0.5102 | 0.5102 | | 0.4694 | 0.4694 | 0.0000 | 2,207.5841 | 2,207.5841 | 0.7140 | | 2,225.4336 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **1.0327** | **10.1917** | **14.5842** | **0.0228** | | **0.5102** | **0.5102** | | **0.4694** | **0.4694** | **0.0000** | **2,207.5841** | **2,207.5841** | **0.7140** | | **2,225.4336** |

## 3.6 Paving - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0633 | 0.0400 | 0.4677 | 1.5000e-003 | 0.1677 | 1.2800e-003 | 0.1689 | 0.0445 | 1.1700e-003 | 0.0456 | | 149.5081 | 149.5081 | 3.8500e-003 | | 149.6043 |
| **Total** | **0.0633** | **0.0400** | **0.4677** | **1.5000e-003** | **0.1677** | **1.2800e-003** | **0.1689** | **0.0445** | **1.1700e-003** | **0.0456** | | **149.5081** | **149.5081** | **3.8500e-003** | | **149.6043** |

## 3.6 Paving - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 0.9882 | 9.5246 | 14.6258 | 0.0228 | | 0.4685 | 0.4685 | | 0.4310 | 0.4310 | | 2,207.5472 | 2,207.5472 | 0.7140 | | 2,225.3963 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **0.9882** | **9.5246** | **14.6258** | **0.0228** | | **0.4685** | **0.4685** | | **0.4310** | **0.4310** | | **2,207.5472** | **2,207.5472** | **0.7140** | | **2,225.3963** |

## 3.6 Paving - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0601 | 0.0364 | 0.4354 | 1.4500e-003 | 0.1677 | 1.2600e-003 | 0.1689 | 0.0445 | 1.1600e-003 | 0.0456 | | 144.8706 | 144.8706 | 3.5300e-003 | | 144.9587 |
| **Total** | **0.0601** | **0.0364** | **0.4354** | **1.4500e-003** | **0.1677** | **1.2600e-003** | **0.1689** | **0.0445** | **1.1600e-003** | **0.0456** | | **144.8706** | **144.8706** | **3.5300e-003** | | **144.9587** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 0.9882 | 9.5246 | 14.6258 | 0.0228 | | 0.4685 | 0.4685 | | 0.4310 | 0.4310 | 0.0000 | 2,207.5472 | 2,207.5472 | 0.7140 | | 2,225.3963 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **0.9882** | **9.5246** | **14.6258** | **0.0228** | | **0.4685** | **0.4685** | | **0.4310** | **0.4310** | **0.0000** | **2,207.5472** | **2,207.5472** | **0.7140** | | **2,225.3963** |

## 3.6 Paving - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0601 | 0.0364 | 0.4354 | 1.4500e-003 | 0.1677 | 1.2600e-003 | 0.1689 | 0.0445 | 1.1600e-003 | 0.0456 | | 144.8706 | 144.8706 | 3.5300e-003 | | 144.9587 |
| **Total** | **0.0601** | **0.0364** | **0.4354** | **1.4500e-003** | **0.1677** | **1.2600e-003** | **0.1689** | **0.0445** | **1.1600e-003** | **0.0456** | | **144.8706** | **144.8706** | **3.5300e-003** | | **144.9587** |

## 3.7 Architectural Coating - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Archit. Coating | 236.4115 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Off-Road | 0.1808 | 1.2188 | 1.8101 | 2.9700e-003 | | 0.0609 | 0.0609 | | 0.0609 | 0.0609 | | 281.4481 | 281.4481 | 0.0159 | | 281.8443 |
| **Total** | **236.5923** | **1.2188** | **1.8101** | **2.9700e-003** | | **0.0609** | **0.0609** | | **0.0609** | **0.0609** | | **281.4481** | **281.4481** | **0.0159** | | **281.8443** |

## 3.7 Architectural Coating - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.6406 | 0.3886 | 4.6439 | 0.0155 | 1.7884 | 0.0134 | 1.8018 | 0.4743 | 0.0123 | 0.4866 | | 1,545.2860 | 1,545.2860 | 0.0376 | | 1,546.2262 |
| **Total** | **0.6406** | **0.3886** | **4.6439** | **0.0155** | **1.7884** | **0.0134** | **1.8018** | **0.4743** | **0.0123** | **0.4866** | | **1,545.2860** | **1,545.2860** | **0.0376** | | **1,546.2262** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Archit. Coating | 236.4115 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Off-Road | 0.1808 | 1.2188 | 1.8101 | 2.9700e-003 | | 0.0609 | 0.0609 | | 0.0609 | 0.0609 | 0.0000 | 281.4481 | 281.4481 | 0.0159 | | 281.8443 |
| **Total** | **236.5923** | **1.2188** | **1.8101** | **2.9700e-003** | | **0.0609** | **0.0609** | | **0.0609** | **0.0609** | **0.0000** | **281.4481** | **281.4481** | **0.0159** | | **281.8443** |

### 3.7 Architectural Coating - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.6406 | 0.3886 | 4.6439 | 0.0155 | 1.7884 | 0.0134 | 1.8018 | 0.4743 | 0.0123 | 0.4866 | | 1,545.2860 | 1,545.2860 | 0.0376 | | 1,546.2262 |
| **Total** | **0.6406** | **0.3886** | **4.6439** | **0.0155** | **1.7884** | **0.0134** | **1.8018** | **0.4743** | **0.0123** | **0.4866** | | **1,545.2860** | **1,545.2860** | **0.0376** | | **1,546.2262** |

## 4.0 Operational Detail - Mobile

### 4.1 Mitigation Measures Mobile

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Mitigated | 9.5233 | 45.9914 | 110.0422 | 0.4681 | 45.9592 | 0.3373 | 46.2965 | 12.2950 | 0.3132 | 12.6083 | | 47,917.8005 | 47,917.8005 | 2.1953 | | 47,972.6839 |
| Unmitigated | 9.5233 | 45.9914 | 110.0422 | 0.4681 | 45.9592 | 0.3373 | 46.2965 | 12.2950 | 0.3132 | 12.6083 | | 47,917.8005 | 47,917.8005 | 2.1953 | | 47,972.6839 |

## 4.2 Trip Summary Information

| | Average Daily Trip Rate | | | Unmitigated | Mitigated |
|---|---|---|---|---|---|
| Land Use | Weekday | Saturday | Sunday | Annual VMT | Annual VMT |
| Apartments Low Rise | 145.75 | 154.25 | 154.00 | 506,227 | 506,227 |
| Apartments Mid Rise | 4,026.75 | 3,773.25 | 4075.50 | 13,660,065 | 13,660,065 |
| General Office Building | 288.45 | 62.55 | 31.05 | 706,812 | 706,812 |
| High Turnover (Sit Down Restaurant) | 2,368.80 | 2,873.52 | 2817.72 | 3,413,937 | 3,413,937 |
| Hotel | 192.00 | 187.50 | 160.00 | 445,703 | 445,703 |
| Quality Restaurant | 501.12 | 511.92 | 461.20 | 707,488 | 707,488 |
| Regional Shopping Center | 528.08 | 601.44 | 357.84 | 1,112,221 | 1,112,221 |
| Total | 8,050.95 | 8,164.43 | 8,057.31 | 20,552,452 | 20,552,452 |

## 4.3 Trip Type Information

| | Miles | | | Trip % | | | Trip Purpose % | | |
|---|---|---|---|---|---|---|---|---|---|
| Land Use | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted | Pass-by |
| Apartments Low Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| Apartments Mid Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| General Office Building | 16.60 | 8.40 | 6.90 | 33.00 | 48.00 | 19.00 | 77 | 19 | 4 |
| High Turnover (Sit Down | 16.60 | 8.40 | 6.90 | 8.50 | 72.50 | 19.00 | 37 | 20 | 43 |
| Hotel | 16.60 | 8.40 | 6.90 | 19.40 | 61.60 | 19.00 | 58 | 38 | 4 |
| Quality Restaurant | 16.60 | 8.40 | 6.90 | 12.00 | 69.00 | 19.00 | 38 | 18 | 44 |
| Regional Shopping Center | 16.60 | 8.40 | 6.90 | 16.30 | 64.70 | 19.00 | 54 | 35 | 11 |

### 4.4 Fleet Mix

| Land Use | LDA | LDT1 | LDT2 | MDV | LHD1 | LHD2 | MHD | HHD | OBUS | UBUS | MCY | SBUS | MH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Apartments Low Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Apartments Mid Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| General Office Building | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| High Turnover (Sit Down Restaurant) | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Hotel | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Quality Restaurant | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Regional Shopping Center | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |

## 5.0 Energy Detail

Historical Energy Use: N

### 5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| NaturalGas Mitigated | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| NaturalGas Unmitigated | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |

## 5.2 Energy by Land Use - NaturalGas

**Unmitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | lb/day | | | | | | | | | | lb/day | | | | | |
| Apartments Low Rise | 1119.16 | 0.0121 | 0.1031 | 0.0439 | 6.6000e-004 | | 8.3400e-003 | 8.3400e-003 | | 8.3400e-003 | 8.3400e-003 | | 131.6662 | 131.6662 | 2.5200e-003 | 2.4100e-003 | 132.4486 |
| Apartments Mid Rise | 35784.3 | 0.3859 | 3.2978 | 1.4033 | 0.0211 | | 0.2666 | 0.2666 | | 0.2666 | 0.2666 | | 4,209.9164 | 4,209.9164 | 0.0807 | 0.0772 | 4,234.9339 |
| General Office Building | 1283.42 | 0.0138 | 0.1258 | 0.1057 | 7.5000e-004 | | 9.5600e-003 | 9.5600e-003 | | 9.5600e-003 | 9.5600e-003 | | 150.9911 | 150.9911 | 2.8900e-003 | 2.7700e-003 | 151.8884 |
| High Turnover (Sit Down Restaurant) | 22759.9 | 0.2455 | 2.2314 | 1.8743 | 0.0134 | | 0.1696 | 0.1696 | | 0.1696 | 0.1696 | | 2,677.6342 | 2,677.6342 | 0.0513 | 0.0491 | 2,693.5460 |
| Hotel | 4769.72 | 0.0514 | 0.4676 | 0.3928 | 2.8100e-003 | | 0.0355 | 0.0355 | | 0.0355 | 0.0355 | | 561.1436 | 561.1436 | 0.0108 | 0.0103 | 564.4782 |
| Quality Restaurant | 5057.75 | 0.0545 | 0.4959 | 0.4165 | 2.9800e-003 | | 0.0377 | 0.0377 | | 0.0377 | 0.0377 | | 595.0298 | 595.0298 | 0.0114 | 0.0109 | 598.5658 |
| Regional Shopping Center | 251.616 | 2.7100e-003 | 0.0247 | 0.0207 | 1.5000e-004 | | 1.8700e-003 | 1.8700e-003 | | 1.8700e-003 | 1.8700e-003 | | 29.6019 | 29.6019 | 5.7000e-004 | 5.4000e-004 | 29.7778 |
| **Total** | | **0.7660** | **6.7463** | **4.2573** | **0.0418** | | **0.5292** | **0.5292** | | **0.5292** | **0.5292** | | **8,355.9832** | **8,355.9832** | **0.1602** | **0.1532** | **8,405.6387** |

## 5.2 Energy by Land Use - NaturalGas

**Mitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | lb/day | | | | | | | | | | lb/day | | | | | |
| Apartments Low Rise | 1.11916 | 0.0121 | 0.1031 | 0.0439 | 6.6000e-004 | | 8.3400e-003 | 8.3400e-003 | | 8.3400e-003 | 8.3400e-003 | | 131.6662 | 131.6662 | 2.5200e-003 | 2.4100e-003 | 132.4486 |
| Apartments Mid Rise | 35.7843 | 0.3859 | 3.2978 | 1.4033 | 0.0211 | | 0.2666 | 0.2666 | | 0.2666 | 0.2666 | | 4,209.9164 | 4,209.9164 | 0.0807 | 0.0772 | 4,234.9339 |
| General Office Building | 1.28342 | 0.0138 | 0.1258 | 0.1057 | 7.5000e-004 | | 9.5600e-003 | 9.5600e-003 | | 9.5600e-003 | 9.5600e-003 | | 150.9911 | 150.9911 | 2.8900e-003 | 2.7700e-003 | 151.8884 |
| High Turnover (Sit Down Restaurant) | 22.7599 | 0.2455 | 2.2314 | 1.8743 | 0.0134 | | 0.1696 | 0.1696 | | 0.1696 | 0.1696 | | 2,677.6342 | 2,677.6342 | 0.0513 | 0.0491 | 2,693.5460 |
| Hotel | 4.76972 | 0.0514 | 0.4676 | 0.3928 | 2.8100e-003 | | 0.0355 | 0.0355 | | 0.0355 | 0.0355 | | 561.1436 | 561.1436 | 0.0108 | 0.0103 | 564.4782 |
| Quality Restaurant | 5.05775 | 0.0545 | 0.4959 | 0.4165 | 2.9800e-003 | | 0.0377 | 0.0377 | | 0.0377 | 0.0377 | | 595.0298 | 595.0298 | 0.0114 | 0.0109 | 598.5658 |
| Regional Shopping Center | 0.251616 | 2.7100e-003 | 0.0247 | 0.0207 | 1.5000e-004 | | 1.8700e-003 | 1.8700e-003 | | 1.8700e-003 | 1.8700e-003 | | 29.6019 | 29.6019 | 5.7000e-004 | 5.4000e-004 | 29.7778 |
| **Total** | | **0.7660** | **6.7463** | **4.2573** | **0.0418** | | **0.5292** | **0.5292** | | **0.5292** | **0.5292** | | **8,355.9832** | **8,355.9832** | **0.1602** | **0.1532** | **8,405.6387** |

# 6.0 Area Detail

## 6.1 Mitigation Measures Area

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Mitigated | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Unmitigated | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |

## 6.2 Area by SubCategory

**Unmitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | lb/day | | | | | | | | | | lb/day | | | | | |
| Architectural Coating | 2.2670 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Consumer Products | 24.1085 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Hearth | 1.6500 | 14.1000 | 6.0000 | 0.0900 | | 1.1400 | 1.1400 | | 1.1400 | 1.1400 | 0.0000 | 18,000.0000 | 18,000.0000 | 0.3450 | 0.3300 | 18,106.9650 |
| Landscaping | 2.4766 | 0.9496 | 82.4430 | 4.3600e-003 | | 0.4574 | 0.4574 | | 0.4574 | 0.4574 | | 148.5950 | 148.5950 | 0.1424 | | 152.1542 |
| **Total** | **30.5020** | **15.0496** | **88.4430** | **0.0944** | | **1.5974** | **1.5974** | | **1.5974** | **1.5974** | **0.0000** | **18,148.5950** | **18,148.5950** | **0.4874** | **0.3300** | **18,259.1192** |

### 6.2 Area by SubCategory

**Mitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | lb/day | | | | | | | | | | lb/day | | | | | |
| Architectural Coating | 2.2670 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Consumer Products | 24.1085 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Hearth | 1.6500 | 14.1000 | 6.0000 | 0.0900 | | 1.1400 | 1.1400 | | 1.1400 | 1.1400 | 0.0000 | 18,000.0000 | 18,000.0000 | 0.3450 | 0.3300 | 18,106.9650 |
| Landscaping | 2.4766 | 0.9496 | 82.4430 | 4.3600e-003 | | 0.4574 | 0.4574 | | 0.4574 | 0.4574 | | 148.5950 | 148.5950 | 0.1424 | | 152.1542 |
| **Total** | **30.5020** | **15.0496** | **88.4430** | **0.0944** | | **1.5974** | **1.5974** | | **1.5974** | **1.5974** | **0.0000** | **18,148.5950** | **18,148.5950** | **0.4874** | **0.3300** | **18,259.1192** |

## 7.0 Water Detail

### 7.1 Mitigation Measures Water

## 8.0 Waste Detail

### 8.1 Mitigation Measures Waste

## 9.0 Operational Offroad

| Equipment Type | Number | Hours/Day | Days/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

## 10.0 Stationary Equipment

**Fire Pumps and Emergency Generators**

| Equipment Type | Number | Hours/Day | Hours/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

**Boilers**

| Equipment Type | Number | Heat Input/Day | Heat Input/Year | Boiler Rating | Fuel Type |
|---|---|---|---|---|---|

**User Defined Equipment**

| Equipment Type | Number |
|---|---|

## 11.0 Vegetation

# Village South Specific Plan (Proposed)

**Los Angeles-South Coast County, Annual**

## 1.0 Project Characteristics

### 1.1 Land Usage

| Land Uses | Size | Metric | Lot Acreage | Floor Surface Area | Population |
|---|---|---|---|---|---|
| General Office Building | 45.00 | 1000sqft | 1.03 | 45,000.00 | 0 |
| High Turnover (Sit Down Restaurant) | 36.00 | 1000sqft | 0.83 | 36,000.00 | 0 |
| Hotel | 50.00 | Room | 1.67 | 72,600.00 | 0 |
| Quality Restaurant | 8.00 | 1000sqft | 0.18 | 8,000.00 | 0 |
| Apartments Low Rise | 25.00 | Dwelling Unit | 1.56 | 25,000.00 | 72 |
| Apartments Mid Rise | 975.00 | Dwelling Unit | 25.66 | 975,000.00 | 2789 |
| Regional Shopping Center | 56.00 | 1000sqft | 1.29 | 56,000.00 | 0 |

### 1.2 Other Project Characteristics

| | | | | | |
|---|---|---|---|---|---|
| **Urbanization** | Urban | **Wind Speed (m/s)** | 2.2 | **Precipitation Freq (Days)** | 33 |
| **Climate Zone** | 9 | | | **Operational Year** | 2028 |
| **Utility Company** | Southern California Edison | | | | |
| **CO2 Intensity (lb/MWhr)** | 702.44 | **CH4 Intensity (lb/MWhr)** | 0.029 | **N2O Intensity (lb/MWhr)** | 0.006 |

### 1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

Trips and VMT - Local hire provision

| Table Name | Column Name | Default Value | New Value |
|---|---|---|---|
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | NumberWood | 1.25 | 0.00 |
| tblFireplaces | NumberWood | 48.75 | 0.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblVehicleTrips | ST_TR | 7.16 | 6.17 |
| tblVehicleTrips | ST_TR | 6.39 | 3.87 |
| tblVehicleTrips | ST_TR | 2.46 | 1.39 |
| tblVehicleTrips | ST_TR | 158.37 | 79.82 |

| | | | |
|---|---|---|---|
| tblVehicleTrips | ST_TR | 8.19 | 3.75 |
| tblVehicleTrips | ST_TR | 94.36 | 63.99 |
| tblVehicleTrips | ST_TR | 49.97 | 10.74 |
| tblVehicleTrips | SU_TR | 6.07 | 6.16 |
| tblVehicleTrips | SU_TR | 5.86 | 4.18 |
| tblVehicleTrips | SU_TR | 1.05 | 0.69 |
| tblVehicleTrips | SU_TR | 131.84 | 78.27 |
| tblVehicleTrips | SU_TR | 5.95 | 3.20 |
| tblVehicleTrips | SU_TR | 72.16 | 57.65 |
| tblVehicleTrips | SU_TR | 25.24 | 6.39 |
| tblVehicleTrips | WD_TR | 6.59 | 5.83 |
| tblVehicleTrips | WD_TR | 6.65 | 4.13 |
| tblVehicleTrips | WD_TR | 11.03 | 6.41 |
| tblVehicleTrips | WD_TR | 127.15 | 65.80 |
| tblVehicleTrips | WD_TR | 8.17 | 3.84 |
| tblVehicleTrips | WD_TR | 89.95 | 62.64 |
| tblVehicleTrips | WD_TR | 42.70 | 9.43 |
| tblWoodstoves | NumberCatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberCatalytic | 48.75 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 48.75 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |

## 2.0 Emissions Summary

## 2.1 Overall Construction

### Unmitigated Construction

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | tons/yr | | | | | | | | | | MT/yr | | | | | |
| 2021 | 0.1704 | 1.8234 | 1.1577 | 2.3800e-003 | 0.4141 | 0.0817 | 0.4958 | 0.1788 | 0.0754 | 0.2542 | 0.0000 | 210.7654 | 210.7654 | 0.0600 | 0.0000 | 212.2661 |
| 2022 | 0.5865 | 4.0240 | 5.1546 | 0.0155 | 0.9509 | 0.1175 | 1.0683 | 0.2518 | 0.1103 | 0.3621 | 0.0000 | 1,418.6554 | 1,418.6554 | 0.1215 | 0.0000 | 1,421.6925 |
| 2023 | 0.5190 | 3.2850 | 4.7678 | 0.0147 | 0.8497 | 0.0971 | 0.9468 | 0.2283 | 0.0912 | 0.3195 | 0.0000 | 1,342.4412 | 1,342.4412 | 0.1115 | 0.0000 | 1,345.2291 |
| 2024 | 4.1592 | 0.1313 | 0.2557 | 5.0000e-004 | 0.0221 | 6.3900e-003 | 0.0285 | 5.8700e-003 | 5.9700e-003 | 0.0118 | 0.0000 | 44.6355 | 44.6355 | 7.8300e-003 | 0.0000 | 44.8311 |
| **Maximum** | **4.1592** | **4.0240** | **5.1546** | **0.0155** | **0.9509** | **0.1175** | **1.0683** | **0.2518** | **0.1103** | **0.3621** | **0.0000** | **1,418.6554** | **1,418.6554** | **0.1215** | **0.0000** | **1,421.6925** |

## 2.1 Overall Construction

### Mitigated Construction

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | tons/yr | | | | | | | | | | MT/yr | | | | | |
| 2021 | 0.1704 | 1.8234 | 1.1577 | 2.3800e-003 | 0.4141 | 0.0817 | 0.4958 | 0.1788 | 0.0754 | 0.2542 | 0.0000 | 210.7651 | 210.7651 | 0.0600 | 0.0000 | 212.2658 |
| 2022 | 0.5865 | 4.0240 | 5.1546 | 0.0155 | 0.9509 | 0.1175 | 1.0683 | 0.2518 | 0.1103 | 0.3621 | 0.0000 | 1,418.6550 | 1,418.6550 | 0.1215 | 0.0000 | 1,421.6921 |
| 2023 | 0.5190 | 3.2850 | 4.7678 | 0.0147 | 0.8497 | 0.0971 | 0.9468 | 0.2283 | 0.0912 | 0.3195 | 0.0000 | 1,342.4409 | 1,342.4409 | 0.1115 | 0.0000 | 1,345.2287 |
| 2024 | 4.1592 | 0.1313 | 0.2557 | 5.0000e-004 | 0.0221 | 6.3900e-003 | 0.0285 | 5.8700e-003 | 5.9700e-003 | 0.0118 | 0.0000 | 44.6354 | 44.6354 | 7.8300e-003 | 0.0000 | 44.8311 |
| **Maximum** | **4.1592** | **4.0240** | **5.1546** | **0.0155** | **0.9509** | **0.1175** | **1.0683** | **0.2518** | **0.1103** | **0.3621** | **0.0000** | **1,418.6550** | **1,418.6550** | **0.1215** | **0.0000** | **1,421.6921** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Percent Reduction** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** |

| Quarter | Start Date | End Date | Maximum Unmitigated ROG + NOX (tons/quarter) | Maximum Mitigated ROG + NOX (tons/quarter) |
|---|---|---|---|---|
| 1 | 9-1-2021 | 11-30-2021 | 1.4091 | 1.4091 |
| 2 | 12-1-2021 | 2-28-2022 | 1.3329 | 1.3329 |
| 3 | 3-1-2022 | 5-31-2022 | 1.1499 | 1.1499 |
| 4 | 6-1-2022 | 8-31-2022 | 1.1457 | 1.1457 |
| 5 | 9-1-2022 | 11-30-2022 | 1.1415 | 1.1415 |
| 6 | 12-1-2022 | 2-28-2023 | 1.0278 | 1.0278 |
| 7 | 3-1-2023 | 5-31-2023 | 0.9868 | 0.9868 |
| 8 | 6-1-2023 | 8-31-2023 | 0.9831 | 0.9831 |

| | | | | |
|---|---|---|---|---|
| **9** | **9-1-2023** | **11-30-2023** | 0.9798 | 0.9798 |
| **10** | **12-1-2023** | **2-29-2024** | 2.8757 | 2.8757 |
| **11** | **3-1-2024** | **5-31-2024** | 1.6188 | 1.6188 |
| | | **Highest** | 2.8757 | 2.8757 |

## 2.2 Overall Operational

### Unmitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Area | 5.1437 | 0.2950 | 10.3804 | 1.6700e-003 | | 0.0714 | 0.0714 | | 0.0714 | 0.0714 | 0.0000 | 220.9670 | 220.9670 | 0.0201 | 3.7400e-003 | 222.5835 |
| Energy | 0.1398 | 1.2312 | 0.7770 | 7.6200e-003 | | 0.0966 | 0.0966 | | 0.0966 | 0.0966 | 0.0000 | 3,896.0732 | 3,896.0732 | 0.1303 | 0.0468 | 3,913.2833 |
| Mobile | 1.5857 | 7.9962 | 19.1834 | 0.0821 | 7.7979 | 0.0580 | 7.8559 | 2.0895 | 0.0539 | 2.1434 | 0.0000 | 7,620.4986 | 7,620.4986 | 0.3407 | 0.0000 | 7,629.0162 |
| Waste | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 207.8079 | 0.0000 | 207.8079 | 12.2811 | 0.0000 | 514.8354 |
| Water | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 29.1632 | 556.6420 | 585.8052 | 3.0183 | 0.0755 | 683.7567 |
| **Total** | **6.8692** | **9.5223** | **30.3407** | **0.0914** | **7.7979** | **0.2260** | **8.0240** | **2.0895** | **0.2219** | **2.3114** | **236.9712** | **12,294.1807** | **12,531.1519** | **15.7904** | **0.1260** | **12,963.4751** |

## 2.2 Overall Operational

**Mitigated Operational**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Area | 5.1437 | 0.2950 | 10.3804 | 1.6700e-003 | | 0.0714 | 0.0714 | | 0.0714 | 0.0714 | 0.0000 | 220.9670 | 220.9670 | 0.0201 | 3.7400e-003 | 222.5835 |
| Energy | 0.1398 | 1.2312 | 0.7770 | 7.6200e-003 | | 0.0966 | 0.0966 | | 0.0966 | 0.0966 | 0.0000 | 3,896.0732 | 3,896.0732 | 0.1303 | 0.0468 | 3,913.2833 |
| Mobile | 1.5857 | 7.9962 | 19.1834 | 0.0821 | 7.7979 | 0.0580 | 7.8559 | 2.0895 | 0.0539 | 2.1434 | 0.0000 | 7,620.4986 | 7,620.4986 | 0.3407 | 0.0000 | 7,629.0162 |
| Waste | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 207.8079 | 0.0000 | 207.8079 | 12.2811 | 0.0000 | 514.8354 |
| Water | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 29.1632 | 556.6420 | 585.8052 | 3.0183 | 0.0755 | 683.7567 |
| **Total** | **6.8692** | **9.5223** | **30.3407** | **0.0914** | **7.7979** | **0.2260** | **8.0240** | **2.0895** | **0.2219** | **2.3114** | **236.9712** | **12,294.1807** | **12,531.1519** | **15.7904** | **0.1260** | **12,963.4751** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Percent Reduction** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** |

## 3.0 Construction Detail

**Construction Phase**

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

| Phase Number | Phase Name | Phase Type | Start Date | End Date | Num Days Week | Num Days | Phase Description |
|---|---|---|---|---|---|---|---|
| 1 | Demolition | Demolition | 9/1/2021 | 10/12/2021 | 5 | 30 | |
| 2 | Site Preparation | Site Preparation | 10/13/2021 | 11/9/2021 | 5 | 20 | |
| 3 | Grading | Grading | 11/10/2021 | 1/11/2022 | 5 | 45 | |
| 4 | Building Construction | Building Construction | 1/12/2022 | 12/12/2023 | 5 | 500 | |
| 5 | Paving | Paving | 12/13/2023 | 1/30/2024 | 5 | 35 | |
| 6 | Architectural Coating | Architectural Coating | 1/31/2024 | 3/19/2024 | 5 | 35 | |

**Acres of Grading (Site Preparation Phase): 0**

**Acres of Grading (Grading Phase): 112.5**

**Acres of Paving: 0**

**Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)**

**OffRoad Equipment**

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

| Phase Name | Offroad Equipment Type | Amount | Usage Hours | Horse Power | Load Factor |
|---|---|---|---|---|---|
| Demolition | Concrete/Industrial Saws | 1 | 8.00 | 81 | 0.73 |
| Demolition | Excavators | 3 | 8.00 | 158 | 0.38 |
| Demolition | Rubber Tired Dozers | 2 | 8.00 | 247 | 0.40 |
| Site Preparation | Rubber Tired Dozers | 3 | 8.00 | 247 | 0.40 |
| Site Preparation | Tractors/Loaders/Backhoes | 4 | 8.00 | 97 | 0.37 |
| Grading | Excavators | 2 | 8.00 | 158 | 0.38 |
| Grading | Graders | 1 | 8.00 | 187 | 0.41 |
| Grading | Rubber Tired Dozers | 1 | 8.00 | 247 | 0.40 |
| Grading | Scrapers | 2 | 8.00 | 367 | 0.48 |
| Grading | Tractors/Loaders/Backhoes | 2 | 8.00 | 97 | 0.37 |
| Building Construction | Cranes | 1 | 7.00 | 231 | 0.29 |
| Building Construction | Forklifts | 3 | 8.00 | 89 | 0.20 |
| Building Construction | Generator Sets | 1 | 8.00 | 84 | 0.74 |
| Building Construction | Tractors/Loaders/Backhoes | 3 | 7.00 | 97 | 0.37 |
| Building Construction | Welders | 1 | 8.00 | 46 | 0.45 |
| Paving | Pavers | 2 | 8.00 | 130 | 0.42 |
| Paving | Paving Equipment | 2 | 8.00 | 132 | 0.36 |
| Paving | Rollers | 2 | 8.00 | 80 | 0.38 |
| Architectural Coating | Air Compressors | 1 | 6.00 | 78 | 0.48 |

**Trips and VMT**

| Phase Name | Offroad Equipment Count | Worker Trip Number | Vendor Trip Number | Hauling Trip Number | Worker Trip Length | Vendor Trip Length | Hauling Trip Length | Worker Vehicle Class | Vendor Vehicle Class | Hauling Vehicle Class |
|---|---|---|---|---|---|---|---|---|---|---|
| Demolition | 6 | 15.00 | 0.00 | 458.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Site Preparation | 7 | 18.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Grading | 8 | 20.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Building Construction | 9 | 801.00 | 143.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Paving | 6 | 15.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Architectural Coating | 1 | 160.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |

## 3.1 Mitigation Measures Construction

## 3.2 Demolition - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.0496 | 0.0000 | 0.0496 | 7.5100e-003 | 0.0000 | 7.5100e-003 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0475 | 0.4716 | 0.3235 | 5.8000e-004 | | 0.0233 | 0.0233 | | 0.0216 | 0.0216 | 0.0000 | 51.0012 | 51.0012 | 0.0144 | 0.0000 | 51.3601 |
| **Total** | **0.0475** | **0.4716** | **0.3235** | **5.8000e-004** | **0.0496** | **0.0233** | **0.0729** | **7.5100e-003** | **0.0216** | **0.0291** | **0.0000** | **51.0012** | **51.0012** | **0.0144** | **0.0000** | **51.3601** |

## 3.2 Demolition - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 1.9300e-003 | 0.0634 | 0.0148 | 1.8000e-004 | 3.9400e-003 | 1.9000e-004 | 4.1300e-003 | 1.0800e-003 | 1.8000e-004 | 1.2600e-003 | 0.0000 | 17.4566 | 17.4566 | 1.2100e-003 | 0.0000 | 17.4869 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 7.2000e-004 | 5.3000e-004 | 6.0900e-003 | 2.0000e-005 | 1.6800e-003 | 1.0000e-005 | 1.6900e-003 | 4.5000e-004 | 1.0000e-005 | 4.6000e-004 | 0.0000 | 1.5281 | 1.5281 | 5.0000e-005 | 0.0000 | 1.5293 |
| **Total** | **2.6500e-003** | **0.0639** | **0.0209** | **2.0000e-004** | **5.6200e-003** | **2.0000e-004** | **5.8200e-003** | **1.5300e-003** | **1.9000e-004** | **1.7200e-003** | **0.0000** | **18.9847** | **18.9847** | **1.2600e-003** | **0.0000** | **19.0161** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.0496 | 0.0000 | 0.0496 | 7.5100e-003 | 0.0000 | 7.5100e-003 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0475 | 0.4716 | 0.3235 | 5.8000e-004 | | 0.0233 | 0.0233 | | 0.0216 | 0.0216 | 0.0000 | 51.0011 | 51.0011 | 0.0144 | 0.0000 | 51.3600 |
| **Total** | **0.0475** | **0.4716** | **0.3235** | **5.8000e-004** | **0.0496** | **0.0233** | **0.0729** | **7.5100e-003** | **0.0216** | **0.0291** | **0.0000** | **51.0011** | **51.0011** | **0.0144** | **0.0000** | **51.3600** |

## 3.2 Demolition - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 1.9300e-003 | 0.0634 | 0.0148 | 1.8000e-004 | 3.9400e-003 | 1.9000e-004 | 4.1300e-003 | 1.0800e-003 | 1.8000e-004 | 1.2600e-003 | 0.0000 | 17.4566 | 17.4566 | 1.2100e-003 | 0.0000 | 17.4869 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 7.2000e-004 | 5.3000e-004 | 6.0900e-003 | 2.0000e-005 | 1.6800e-003 | 1.0000e-005 | 1.6900e-003 | 4.5000e-004 | 1.0000e-005 | 4.6000e-004 | 0.0000 | 1.5281 | 1.5281 | 5.0000e-005 | 0.0000 | 1.5293 |
| **Total** | **2.6500e-003** | **0.0639** | **0.0209** | **2.0000e-004** | **5.6200e-003** | **2.0000e-004** | **5.8200e-003** | **1.5300e-003** | **1.9000e-004** | **1.7200e-003** | **0.0000** | **18.9847** | **18.9847** | **1.2600e-003** | **0.0000** | **19.0161** |

## 3.3 Site Preparation - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.1807 | 0.0000 | 0.1807 | 0.0993 | 0.0000 | 0.0993 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0389 | 0.4050 | 0.2115 | 3.8000e-004 | | 0.0204 | 0.0204 | | 0.0188 | 0.0188 | 0.0000 | 33.4357 | 33.4357 | 0.0108 | 0.0000 | 33.7061 |
| **Total** | **0.0389** | **0.4050** | **0.2115** | **3.8000e-004** | **0.1807** | **0.0204** | **0.2011** | **0.0993** | **0.0188** | **0.1181** | **0.0000** | **33.4357** | **33.4357** | **0.0108** | **0.0000** | **33.7061** |

## 3.3 Site Preparation - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 5.8000e-004 | 4.3000e-004 | 4.8700e-003 | 1.0000e-005 | 1.3400e-003 | 1.0000e-005 | 1.3500e-003 | 3.6000e-004 | 1.0000e-005 | 3.7000e-004 | 0.0000 | 1.2225 | 1.2225 | 4.0000e-005 | 0.0000 | 1.2234 |
| **Total** | **5.8000e-004** | **4.3000e-004** | **4.8700e-003** | **1.0000e-005** | **1.3400e-003** | **1.0000e-005** | **1.3500e-003** | **3.6000e-004** | **1.0000e-005** | **3.7000e-004** | **0.0000** | **1.2225** | **1.2225** | **4.0000e-005** | **0.0000** | **1.2234** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.1807 | 0.0000 | 0.1807 | 0.0993 | 0.0000 | 0.0993 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0389 | 0.4050 | 0.2115 | 3.8000e-004 | | 0.0204 | 0.0204 | | 0.0188 | 0.0188 | 0.0000 | 33.4357 | 33.4357 | 0.0108 | 0.0000 | 33.7060 |
| **Total** | **0.0389** | **0.4050** | **0.2115** | **3.8000e-004** | **0.1807** | **0.0204** | **0.2011** | **0.0993** | **0.0188** | **0.1181** | **0.0000** | **33.4357** | **33.4357** | **0.0108** | **0.0000** | **33.7060** |

## 3.3 Site Preparation - 2021

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 5.8000e-004 | 4.3000e-004 | 4.8700e-003 | 1.0000e-005 | 1.3400e-003 | 1.0000e-005 | 1.3500e-003 | 3.6000e-004 | 1.0000e-005 | 3.7000e-004 | 0.0000 | 1.2225 | 1.2225 | 4.0000e-005 | 0.0000 | 1.2234 |
| **Total** | **5.8000e-004** | **4.3000e-004** | **4.8700e-003** | **1.0000e-005** | **1.3400e-003** | **1.0000e-005** | **1.3500e-003** | **3.6000e-004** | **1.0000e-005** | **3.7000e-004** | **0.0000** | **1.2225** | **1.2225** | **4.0000e-005** | **0.0000** | **1.2234** |

## 3.4 Grading - 2021

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.1741 | 0.0000 | 0.1741 | 0.0693 | 0.0000 | 0.0693 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0796 | 0.8816 | 0.5867 | 1.1800e-003 | | 0.0377 | 0.0377 | | 0.0347 | 0.0347 | 0.0000 | 103.5405 | 103.5405 | 0.0335 | 0.0000 | 104.3776 |
| **Total** | **0.0796** | **0.8816** | **0.5867** | **1.1800e-003** | **0.1741** | **0.0377** | **0.2118** | **0.0693** | **0.0347** | **0.1040** | **0.0000** | **103.5405** | **103.5405** | **0.0335** | **0.0000** | **104.3776** |

## 3.4 Grading - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 1.2200e-003 | 9.0000e-004 | 0.0103 | 3.0000e-005 | 2.8300e-003 | 2.0000e-005 | 2.8600e-003 | 7.5000e-004 | 2.0000e-005 | 7.8000e-004 | 0.0000 | 2.5808 | 2.5808 | 8.0000e-005 | 0.0000 | 2.5828 |
| **Total** | **1.2200e-003** | **9.0000e-004** | **0.0103** | **3.0000e-005** | **2.8300e-003** | **2.0000e-005** | **2.8600e-003** | **7.5000e-004** | **2.0000e-005** | **7.8000e-004** | **0.0000** | **2.5808** | **2.5808** | **8.0000e-005** | **0.0000** | **2.5828** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.1741 | 0.0000 | 0.1741 | 0.0693 | 0.0000 | 0.0693 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0796 | 0.8816 | 0.5867 | 1.1800e-003 | | 0.0377 | 0.0377 | | 0.0347 | 0.0347 | 0.0000 | 103.5403 | 103.5403 | 0.0335 | 0.0000 | 104.3775 |
| **Total** | **0.0796** | **0.8816** | **0.5867** | **1.1800e-003** | **0.1741** | **0.0377** | **0.2118** | **0.0693** | **0.0347** | **0.1040** | **0.0000** | **103.5403** | **103.5403** | **0.0335** | **0.0000** | **104.3775** |

## 3.4 Grading - 2021

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 1.2200e-003 | 9.0000e-004 | 0.0103 | 3.0000e-005 | 2.8300e-003 | 2.0000e-005 | 2.8600e-003 | 7.5000e-004 | 2.0000e-005 | 7.8000e-004 | 0.0000 | 2.5808 | 2.5808 | 8.0000e-005 | 0.0000 | 2.5828 |
| **Total** | **1.2200e-003** | **9.0000e-004** | **0.0103** | **3.0000e-005** | **2.8300e-003** | **2.0000e-005** | **2.8600e-003** | **7.5000e-004** | **2.0000e-005** | **7.8000e-004** | **0.0000** | **2.5808** | **2.5808** | **8.0000e-005** | **0.0000** | **2.5828** |

## 3.4 Grading - 2022

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.0807 | 0.0000 | 0.0807 | 0.0180 | 0.0000 | 0.0180 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0127 | 0.1360 | 0.1017 | 2.2000e-004 | | 5.7200e-003 | 5.7200e-003 | | 5.2600e-003 | 5.2600e-003 | 0.0000 | 19.0871 | 19.0871 | 6.1700e-003 | 0.0000 | 19.2414 |
| **Total** | **0.0127** | **0.1360** | **0.1017** | **2.2000e-004** | **0.0807** | **5.7200e-003** | **0.0865** | **0.0180** | **5.2600e-003** | **0.0233** | **0.0000** | **19.0871** | **19.0871** | **6.1700e-003** | **0.0000** | **19.2414** |

## 3.4 Grading - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 2.1000e-004 | 1.5000e-004 | 1.7400e-003 | 1.0000e-005 | 5.2000e-004 | 0.0000 | 5.3000e-004 | 1.4000e-004 | 0.0000 | 1.4000e-004 | 0.0000 | 0.4587 | 0.4587 | 1.0000e-005 | 0.0000 | 0.4590 |
| **Total** | **2.1000e-004** | **1.5000e-004** | **1.7400e-003** | **1.0000e-005** | **5.2000e-004** | **0.0000** | **5.3000e-004** | **1.4000e-004** | **0.0000** | **1.4000e-004** | **0.0000** | **0.4587** | **0.4587** | **1.0000e-005** | **0.0000** | **0.4590** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Fugitive Dust | | | | | 0.0807 | 0.0000 | 0.0807 | 0.0180 | 0.0000 | 0.0180 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 0.0127 | 0.1360 | 0.1017 | 2.2000e-004 | | 5.7200e-003 | 5.7200e-003 | | 5.2600e-003 | 5.2600e-003 | 0.0000 | 19.0871 | 19.0871 | 6.1700e-003 | 0.0000 | 19.2414 |
| **Total** | **0.0127** | **0.1360** | **0.1017** | **2.2000e-004** | **0.0807** | **5.7200e-003** | **0.0865** | **0.0180** | **5.2600e-003** | **0.0233** | **0.0000** | **19.0871** | **19.0871** | **6.1700e-003** | **0.0000** | **19.2414** |

## 3.4 Grading - 2022

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 2.1000e-004 | 1.5000e-004 | 1.7400e-003 | 1.0000e-005 | 5.2000e-004 | 0.0000 | 5.3000e-004 | 1.4000e-004 | 0.0000 | 1.4000e-004 | 0.0000 | 0.4587 | 0.4587 | 1.0000e-005 | 0.0000 | 0.4590 |
| **Total** | **2.1000e-004** | **1.5000e-004** | **1.7400e-003** | **1.0000e-005** | **5.2000e-004** | **0.0000** | **5.3000e-004** | **1.4000e-004** | **0.0000** | **1.4000e-004** | **0.0000** | **0.4587** | **0.4587** | **1.0000e-005** | **0.0000** | **0.4590** |

## 3.5 Building Construction - 2022

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.2158 | 1.9754 | 2.0700 | 3.4100e-003 | | 0.1023 | 0.1023 | | 0.0963 | 0.0963 | 0.0000 | 293.1324 | 293.1324 | 0.0702 | 0.0000 | 294.8881 |
| **Total** | **0.2158** | **1.9754** | **2.0700** | **3.4100e-003** | | **0.1023** | **0.1023** | | **0.0963** | **0.0963** | **0.0000** | **293.1324** | **293.1324** | **0.0702** | **0.0000** | **294.8881** |

## 3.5 Building Construction - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0527 | 1.6961 | 0.4580 | 4.5500e-003 | 0.1140 | 3.1800e-003 | 0.1171 | 0.0329 | 3.0400e-003 | 0.0359 | 0.0000 | 441.9835 | 441.9835 | 0.0264 | 0.0000 | 442.6435 |
| Worker | 0.3051 | 0.2164 | 2.5233 | 7.3500e-003 | 0.7557 | 6.2300e-003 | 0.7619 | 0.2007 | 5.7400e-003 | 0.2065 | 0.0000 | 663.9936 | 663.9936 | 0.0187 | 0.0000 | 664.4604 |
| **Total** | **0.3578** | **1.9125** | **2.9812** | **0.0119** | **0.8696** | **9.4100e-003** | **0.8790** | **0.2336** | **8.7800e-003** | **0.2424** | **0.0000** | **1,105.9771** | **1,105.9771** | **0.0451** | **0.0000** | **1,107.1039** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.2158 | 1.9754 | 2.0700 | 3.4100e-003 | | 0.1023 | 0.1023 | | 0.0963 | 0.0963 | 0.0000 | 293.1321 | 293.1321 | 0.0702 | 0.0000 | 294.8877 |
| **Total** | **0.2158** | **1.9754** | **2.0700** | **3.4100e-003** | | **0.1023** | **0.1023** | | **0.0963** | **0.0963** | **0.0000** | **293.1321** | **293.1321** | **0.0702** | **0.0000** | **294.8877** |

## 3.5 Building Construction - 2022

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0527 | 1.6961 | 0.4580 | 4.5500e-003 | 0.1140 | 3.1800e-003 | 0.1171 | 0.0329 | 3.0400e-003 | 0.0359 | 0.0000 | 441.9835 | 441.9835 | 0.0264 | 0.0000 | 442.6435 |
| Worker | 0.3051 | 0.2164 | 2.5233 | 7.3500e-003 | 0.7557 | 6.2300e-003 | 0.7619 | 0.2007 | 5.7400e-003 | 0.2065 | 0.0000 | 663.9936 | 663.9936 | 0.0187 | 0.0000 | 664.4604 |
| **Total** | **0.3578** | **1.9125** | **2.9812** | **0.0119** | **0.8696** | **9.4100e-003** | **0.8790** | **0.2336** | **8.7800e-003** | **0.2424** | **0.0000** | **1,105.9771** | **1,105.9771** | **0.0451** | **0.0000** | **1,107.1039** |

## 3.5 Building Construction - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.1942 | 1.7765 | 2.0061 | 3.3300e-003 | | 0.0864 | 0.0864 | | 0.0813 | 0.0813 | 0.0000 | 286.2789 | 286.2789 | 0.0681 | 0.0000 | 287.9814 |
| **Total** | **0.1942** | **1.7765** | **2.0061** | **3.3300e-003** | | **0.0864** | **0.0864** | | **0.0813** | **0.0813** | **0.0000** | **286.2789** | **286.2789** | **0.0681** | **0.0000** | **287.9814** |

## 3.5 Building Construction - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0382 | 1.2511 | 0.4011 | 4.3000e-003 | 0.1113 | 1.4600e-003 | 0.1127 | 0.0321 | 1.4000e-003 | 0.0335 | 0.0000 | 417.9930 | 417.9930 | 0.0228 | 0.0000 | 418.5624 |
| Worker | 0.2795 | 0.1910 | 2.2635 | 6.9100e-003 | 0.7377 | 5.9100e-003 | 0.7436 | 0.1960 | 5.4500e-003 | 0.2014 | 0.0000 | 624.5363 | 624.5363 | 0.0164 | 0.0000 | 624.9466 |
| **Total** | **0.3177** | **1.4420** | **2.6646** | **0.0112** | **0.8490** | **7.3700e-003** | **0.8564** | **0.2281** | **6.8500e-003** | **0.2349** | **0.0000** | **1,042.5294** | **1,042.5294** | **0.0392** | **0.0000** | **1,043.5090** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.1942 | 1.7765 | 2.0061 | 3.3300e-003 | | 0.0864 | 0.0864 | | 0.0813 | 0.0813 | 0.0000 | 286.2785 | 286.2785 | 0.0681 | 0.0000 | 287.9811 |
| **Total** | **0.1942** | **1.7765** | **2.0061** | **3.3300e-003** | | **0.0864** | **0.0864** | | **0.0813** | **0.0813** | **0.0000** | **286.2785** | **286.2785** | **0.0681** | **0.0000** | **287.9811** |

## 3.5 Building Construction - 2023

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0382 | 1.2511 | 0.4011 | 4.3000e-003 | 0.1113 | 1.4600e-003 | 0.1127 | 0.0321 | 1.4000e-003 | 0.0335 | 0.0000 | 417.9930 | 417.9930 | 0.0228 | 0.0000 | 418.5624 |
| Worker | 0.2795 | 0.1910 | 2.2635 | 6.9100e-003 | 0.7377 | 5.9100e-003 | 0.7436 | 0.1960 | 5.4500e-003 | 0.2014 | 0.0000 | 624.5363 | 624.5363 | 0.0164 | 0.0000 | 624.9466 |
| **Total** | **0.3177** | **1.4420** | **2.6646** | **0.0112** | **0.8490** | **7.3700e-003** | **0.8564** | **0.2281** | **6.8500e-003** | **0.2349** | **0.0000** | **1,042.5294** | **1,042.5294** | **0.0392** | **0.0000** | **1,043.5090** |

## 3.6 Paving - 2023

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 6.7100e-003 | 0.0663 | 0.0948 | 1.5000e-004 | | 3.3200e-003 | 3.3200e-003 | | 3.0500e-003 | 3.0500e-003 | 0.0000 | 13.0175 | 13.0175 | 4.2100e-003 | 0.0000 | 13.1227 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| **Total** | **6.7100e-003** | **0.0663** | **0.0948** | **1.5000e-004** | | **3.3200e-003** | **3.3200e-003** | | **3.0500e-003** | **3.0500e-003** | **0.0000** | **13.0175** | **13.0175** | **4.2100e-003** | **0.0000** | **13.1227** |

## 3.6 Paving - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 2.8000e-004 | 1.9000e-004 | 2.2300e-003 | 1.0000e-005 | 7.3000e-004 | 1.0000e-005 | 7.3000e-004 | 1.9000e-004 | 1.0000e-005 | 2.0000e-004 | 0.0000 | 0.6156 | 0.6156 | 2.0000e-005 | 0.0000 | 0.6160 |
| **Total** | **2.8000e-004** | **1.9000e-004** | **2.2300e-003** | **1.0000e-005** | **7.3000e-004** | **1.0000e-005** | **7.3000e-004** | **1.9000e-004** | **1.0000e-005** | **2.0000e-004** | **0.0000** | **0.6156** | **0.6156** | **2.0000e-005** | **0.0000** | **0.6160** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 6.7100e-003 | 0.0663 | 0.0948 | 1.5000e-004 | | 3.3200e-003 | 3.3200e-003 | | 3.0500e-003 | 3.0500e-003 | 0.0000 | 13.0175 | 13.0175 | 4.2100e-003 | 0.0000 | 13.1227 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| **Total** | **6.7100e-003** | **0.0663** | **0.0948** | **1.5000e-004** | | **3.3200e-003** | **3.3200e-003** | | **3.0500e-003** | **3.0500e-003** | **0.0000** | **13.0175** | **13.0175** | **4.2100e-003** | **0.0000** | **13.1227** |

## 3.6 Paving - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 2.8000e-004 | 1.9000e-004 | 2.2300e-003 | 1.0000e-005 | 7.3000e-004 | 1.0000e-005 | 7.3000e-004 | 1.9000e-004 | 1.0000e-005 | 2.0000e-004 | 0.0000 | 0.6156 | 0.6156 | 2.0000e-005 | 0.0000 | 0.6160 |
| **Total** | **2.8000e-004** | **1.9000e-004** | **2.2300e-003** | **1.0000e-005** | **7.3000e-004** | **1.0000e-005** | **7.3000e-004** | **1.9000e-004** | **1.0000e-005** | **2.0000e-004** | **0.0000** | **0.6156** | **0.6156** | **2.0000e-005** | **0.0000** | **0.6160** |

## 3.6 Paving - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.0109 | 0.1048 | 0.1609 | 2.5000e-004 | | 5.1500e-003 | 5.1500e-003 | | 4.7400e-003 | 4.7400e-003 | 0.0000 | 22.0292 | 22.0292 | 7.1200e-003 | 0.0000 | 22.2073 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| **Total** | **0.0109** | **0.1048** | **0.1609** | **2.5000e-004** | | **5.1500e-003** | **5.1500e-003** | | **4.7400e-003** | **4.7400e-003** | **0.0000** | **22.0292** | **22.0292** | **7.1200e-003** | **0.0000** | **22.2073** |

## 3.6 Paving - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 4.4000e-004 | 2.9000e-004 | 3.5100e-003 | 1.0000e-005 | 1.2300e-003 | 1.0000e-005 | 1.2400e-003 | 3.3000e-004 | 1.0000e-005 | 3.4000e-004 | 0.0000 | 1.0094 | 1.0094 | 3.0000e-005 | 0.0000 | 1.0100 |
| **Total** | **4.4000e-004** | **2.9000e-004** | **3.5100e-003** | **1.0000e-005** | **1.2300e-003** | **1.0000e-005** | **1.2400e-003** | **3.3000e-004** | **1.0000e-005** | **3.4000e-004** | **0.0000** | **1.0094** | **1.0094** | **3.0000e-005** | **0.0000** | **1.0100** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Off-Road | 0.0109 | 0.1048 | 0.1609 | 2.5000e-004 | | 5.1500e-003 | 5.1500e-003 | | 4.7400e-003 | 4.7400e-003 | 0.0000 | 22.0292 | 22.0292 | 7.1200e-003 | 0.0000 | 22.2073 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| **Total** | **0.0109** | **0.1048** | **0.1609** | **2.5000e-004** | | **5.1500e-003** | **5.1500e-003** | | **4.7400e-003** | **4.7400e-003** | **0.0000** | **22.0292** | **22.0292** | **7.1200e-003** | **0.0000** | **22.2073** |

## 3.6 Paving - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 4.4000e-004 | 2.9000e-004 | 3.5100e-003 | 1.0000e-005 | 1.2300e-003 | 1.0000e-005 | 1.2400e-003 | 3.3000e-004 | 1.0000e-005 | 3.4000e-004 | 0.0000 | 1.0094 | 1.0094 | 3.0000e-005 | 0.0000 | 1.0100 |
| **Total** | **4.4000e-004** | **2.9000e-004** | **3.5100e-003** | **1.0000e-005** | **1.2300e-003** | **1.0000e-005** | **1.2400e-003** | **3.3000e-004** | **1.0000e-005** | **3.4000e-004** | **0.0000** | **1.0094** | **1.0094** | **3.0000e-005** | **0.0000** | **1.0100** |

## 3.7 Architectural Coating - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Archit. Coating | 4.1372 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 3.1600e-003 | 0.0213 | 0.0317 | 5.0000e-005 | | 1.0700e-003 | 1.0700e-003 | | 1.0700e-003 | 1.0700e-003 | 0.0000 | 4.4682 | 4.4682 | 2.5000e-004 | 0.0000 | 4.4745 |
| **Total** | **4.1404** | **0.0213** | **0.0317** | **5.0000e-005** | | **1.0700e-003** | **1.0700e-003** | | **1.0700e-003** | **1.0700e-003** | **0.0000** | **4.4682** | **4.4682** | **2.5000e-004** | **0.0000** | **4.4745** |

## 3.7 Architectural Coating - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 7.4800e-003 | 4.9300e-003 | 0.0596 | 1.9000e-004 | 0.0209 | 1.6000e-004 | 0.0211 | 5.5500e-003 | 1.5000e-004 | 5.7000e-003 | 0.0000 | 17.1287 | 17.1287 | 4.3000e-004 | 0.0000 | 17.1394 |
| **Total** | **7.4800e-003** | **4.9300e-003** | **0.0596** | **1.9000e-004** | **0.0209** | **1.6000e-004** | **0.0211** | **5.5500e-003** | **1.5000e-004** | **5.7000e-003** | **0.0000** | **17.1287** | **17.1287** | **4.3000e-004** | **0.0000** | **17.1394** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Archit. Coating | 4.1372 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Off-Road | 3.1600e-003 | 0.0213 | 0.0317 | 5.0000e-005 | | 1.0700e-003 | 1.0700e-003 | | 1.0700e-003 | 1.0700e-003 | 0.0000 | 4.4682 | 4.4682 | 2.5000e-004 | 0.0000 | 4.4745 |
| **Total** | **4.1404** | **0.0213** | **0.0317** | **5.0000e-005** | | **1.0700e-003** | **1.0700e-003** | | **1.0700e-003** | **1.0700e-003** | **0.0000** | **4.4682** | **4.4682** | **2.5000e-004** | **0.0000** | **4.4745** |

### 3.7 Architectural Coating - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Worker | 7.4800e-003 | 4.9300e-003 | 0.0596 | 1.9000e-004 | 0.0209 | 1.6000e-004 | 0.0211 | 5.5500e-003 | 1.5000e-004 | 5.7000e-003 | 0.0000 | 17.1287 | 17.1287 | 4.3000e-004 | 0.0000 | 17.1394 |
| **Total** | **7.4800e-003** | **4.9300e-003** | **0.0596** | **1.9000e-004** | **0.0209** | **1.6000e-004** | **0.0211** | **5.5500e-003** | **1.5000e-004** | **5.7000e-003** | **0.0000** | **17.1287** | **17.1287** | **4.3000e-004** | **0.0000** | **17.1394** |

## 4.0 Operational Detail - Mobile

### 4.1 Mitigation Measures Mobile

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Mitigated | 1.5857 | 7.9962 | 19.1834 | 0.0821 | 7.7979 | 0.0580 | 7.8559 | 2.0895 | 0.0539 | 2.1434 | 0.0000 | 7,620.4986 | 7,620.4986 | 0.3407 | 0.0000 | 7,629.0162 |
| Unmitigated | 1.5857 | 7.9962 | 19.1834 | 0.0821 | 7.7979 | 0.0580 | 7.8559 | 2.0895 | 0.0539 | 2.1434 | 0.0000 | 7,620.4986 | 7,620.4986 | 0.3407 | 0.0000 | 7,629.0162 |

## 4.2 Trip Summary Information

| | Average Daily Trip Rate | | | Unmitigated | Mitigated |
|---|---|---|---|---|---|
| Land Use | Weekday | Saturday | Sunday | Annual VMT | Annual VMT |
| Apartments Low Rise | 145.75 | 154.25 | 154.00 | 506,227 | 506,227 |
| Apartments Mid Rise | 4,026.75 | 3,773.25 | 4075.50 | 13,660,065 | 13,660,065 |
| General Office Building | 288.45 | 62.55 | 31.05 | 706,812 | 706,812 |
| High Turnover (Sit Down Restaurant) | 2,368.80 | 2,873.52 | 2817.72 | 3,413,937 | 3,413,937 |
| Hotel | 192.00 | 187.50 | 160.00 | 445,703 | 445,703 |
| Quality Restaurant | 501.12 | 511.92 | 461.20 | 707,488 | 707,488 |
| Regional Shopping Center | 528.08 | 601.44 | 357.84 | 1,112,221 | 1,112,221 |
| Total | 8,050.95 | 8,164.43 | 8,057.31 | 20,552,452 | 20,552,452 |

## 4.3 Trip Type Information

| | Miles | | | Trip % | | | Trip Purpose % | | |
|---|---|---|---|---|---|---|---|---|---|
| Land Use | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted | Pass-by |
| Apartments Low Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| Apartments Mid Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| General Office Building | 16.60 | 8.40 | 6.90 | 33.00 | 48.00 | 19.00 | 77 | 19 | 4 |
| High Turnover (Sit Down | 16.60 | 8.40 | 6.90 | 8.50 | 72.50 | 19.00 | 37 | 20 | 43 |
| Hotel | 16.60 | 8.40 | 6.90 | 19.40 | 61.60 | 19.00 | 58 | 38 | 4 |
| Quality Restaurant | 16.60 | 8.40 | 6.90 | 12.00 | 69.00 | 19.00 | 38 | 18 | 44 |
| Regional Shopping Center | 16.60 | 8.40 | 6.90 | 16.30 | 64.70 | 19.00 | 54 | 35 | 11 |

### 4.4 Fleet Mix

| Land Use | LDA | LDT1 | LDT2 | MDV | LHD1 | LHD2 | MHD | HHD | OBUS | UBUS | MCY | SBUS | MH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Apartments Low Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Apartments Mid Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| General Office Building | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| High Turnover (Sit Down Restaurant) | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Hotel | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Quality Restaurant | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Regional Shopping Center | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |

## 5.0 Energy Detail

Historical Energy Use: N

### 5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Electricity Mitigated | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 2,512.6465 | 2,512.6465 | 0.1037 | 0.0215 | 2,521.6356 |
| Electricity Unmitigated | | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 2,512.6465 | 2,512.6465 | 0.1037 | 0.0215 | 2,521.6356 |
| NaturalGas Mitigated | 0.1398 | 1.2312 | 0.7770 | 7.6200e-003 | | 0.0966 | 0.0966 | | 0.0966 | 0.0966 | 0.0000 | 1,383.4267 | 1,383.4267 | 0.0265 | 0.0254 | 1,391.6478 |
| NaturalGas Unmitigated | 0.1398 | 1.2312 | 0.7770 | 7.6200e-003 | | 0.0966 | 0.0966 | | 0.0966 | 0.0966 | 0.0000 | 1,383.4267 | 1,383.4267 | 0.0265 | 0.0254 | 1,391.6478 |

## 5.2 Energy by Land Use - NaturalGas

**Unmitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Apartments Low Rise | 408494 | 2.2000e-003 | 0.0188 | 8.0100e-003 | 1.2000e-004 | | 1.5200e-003 | 1.5200e-003 | | 1.5200e-003 | 1.5200e-003 | 0.0000 | 21.7988 | 21.7988 | 4.2000e-004 | 4.0000e-004 | 21.9284 |
| Apartments Mid Rise | 1.30613e+007 | 0.0704 | 0.6018 | 0.2561 | 3.8400e-003 | | 0.0487 | 0.0487 | | 0.0487 | 0.0487 | 0.0000 | 696.9989 | 696.9989 | 0.0134 | 0.0128 | 701.1408 |
| General Office Building | 468450 | 2.5300e-003 | 0.0230 | 0.0193 | 1.4000e-004 | | 1.7500e-003 | 1.7500e-003 | | 1.7500e-003 | 1.7500e-003 | 0.0000 | 24.9983 | 24.9983 | 4.8000e-004 | 4.6000e-004 | 25.1468 |
| High Turnover (Sit Down Restaurant) | 8.30736e+006 | 0.0448 | 0.4072 | 0.3421 | 2.4400e-003 | | 0.0310 | 0.0310 | | 0.0310 | 0.0310 | 0.0000 | 443.3124 | 443.3124 | 8.5000e-003 | 8.1300e-003 | 445.9468 |
| Hotel | 1.74095e+006 | 9.3900e-003 | 0.0853 | 0.0717 | 5.1000e-004 | | 6.4900e-003 | 6.4900e-003 | | 6.4900e-003 | 6.4900e-003 | 0.0000 | 92.9036 | 92.9036 | 1.7800e-003 | 1.7000e-003 | 93.4557 |
| Quality Restaurant | 1.84608e+006 | 9.9500e-003 | 0.0905 | 0.0760 | 5.4000e-004 | | 6.8800e-003 | 6.8800e-003 | | 6.8800e-003 | 6.8800e-003 | 0.0000 | 98.5139 | 98.5139 | 1.8900e-003 | 1.8100e-003 | 99.0993 |
| Regional Shopping Center | 91840 | 5.0000e-004 | 4.5000e-003 | 3.7800e-003 | 3.0000e-005 | | 3.4000e-004 | 3.4000e-004 | | 3.4000e-004 | 3.4000e-004 | 0.0000 | 4.9009 | 4.9009 | 9.0000e-005 | 9.0000e-005 | 4.9301 |
| **Total** | | **0.1398** | **1.2312** | **0.7770** | **7.6200e-003** | | **0.0966** | **0.0966** | | **0.0966** | **0.0966** | **0.0000** | **1,383.4268** | **1,383.4268** | **0.0265** | **0.0254** | **1,391.6478** |

## 5.2 Energy by Land Use - NaturalGas

**Mitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Apartments Low Rise | 408494 | 2.2000e-003 | 0.0188 | 8.0100e-003 | 1.2000e-004 | | 1.5200e-003 | 1.5200e-003 | | 1.5200e-003 | 1.5200e-003 | 0.0000 | 21.7988 | 21.7988 | 4.2000e-004 | 4.0000e-004 | 21.9284 |
| Apartments Mid Rise | 1.30613e+007 | 0.0704 | 0.6018 | 0.2561 | 3.8400e-003 | | 0.0487 | 0.0487 | | 0.0487 | 0.0487 | 0.0000 | 696.9989 | 696.9989 | 0.0134 | 0.0128 | 701.1408 |
| General Office Building | 468450 | 2.5300e-003 | 0.0230 | 0.0193 | 1.4000e-004 | | 1.7500e-003 | 1.7500e-003 | | 1.7500e-003 | 1.7500e-003 | 0.0000 | 24.9983 | 24.9983 | 4.8000e-004 | 4.6000e-004 | 25.1468 |
| High Turnover (Sit Down Restaurant) | 8.30736e+006 | 0.0448 | 0.4072 | 0.3421 | 2.4400e-003 | | 0.0310 | 0.0310 | | 0.0310 | 0.0310 | 0.0000 | 443.3124 | 443.3124 | 8.5000e-003 | 8.1300e-003 | 445.9468 |
| Hotel | 1.74095e+006 | 9.3900e-003 | 0.0853 | 0.0717 | 5.1000e-004 | | 6.4900e-003 | 6.4900e-003 | | 6.4900e-003 | 6.4900e-003 | 0.0000 | 92.9036 | 92.9036 | 1.7800e-003 | 1.7000e-003 | 93.4557 |
| Quality Restaurant | 1.84608e+006 | 9.9500e-003 | 0.0905 | 0.0760 | 5.4000e-004 | | 6.8800e-003 | 6.8800e-003 | | 6.8800e-003 | 6.8800e-003 | 0.0000 | 98.5139 | 98.5139 | 1.8900e-003 | 1.8100e-003 | 99.0993 |
| Regional Shopping Center | 91840 | 5.0000e-004 | 4.5000e-003 | 3.7800e-003 | 3.0000e-005 | | 3.4000e-004 | 3.4000e-004 | | 3.4000e-004 | 3.4000e-004 | 0.0000 | 4.9009 | 4.9009 | 9.0000e-005 | 9.0000e-005 | 4.9301 |
| **Total** | | **0.1398** | **1.2312** | **0.7770** | **7.6200e-003** | | **0.0966** | **0.0966** | | **0.0966** | **0.0966** | **0.0000** | **1,383.4268** | **1,383.4268** | **0.0265** | **0.0254** | **1,391.6478** |

## 5.3 Energy by Land Use - Electricity

**Unmitigated**

| | Electricity Use | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | kWh/yr | MT/yr | | | |
| Apartments Low Rise | 106010 | 33.7770 | 1.3900e-003 | 2.9000e-004 | 33.8978 |
| Apartments Mid Rise | 3.94697e+006 | 1,257.5879 | 0.0519 | 0.0107 | 1,262.0869 |
| General Office Building | 584550 | 186.2502 | 7.6900e-003 | 1.5900e-003 | 186.9165 |
| High Turnover (Sit Down Restaurant) | 1.58904e+006 | 506.3022 | 0.0209 | 4.3200e-003 | 508.1135 |
| Hotel | 550308 | 175.3399 | 7.2400e-003 | 1.5000e-003 | 175.9672 |
| Quality Restaurant | 353120 | 112.5116 | 4.6500e-003 | 9.6000e-004 | 112.9141 |
| Regional Shopping Center | 756000 | 240.8778 | 9.9400e-003 | 2.0600e-003 | 241.7395 |
| **Total** | | **2,512.6465** | **0.1037** | **0.0215** | **2,521.6356** |

## 5.3 Energy by Land Use - Electricity

**Mitigated**

| | Electricity Use | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | kWh/yr | MT/yr | | | |
| Apartments Low Rise | 106010 | 33.7770 | 1.3900e-003 | 2.9000e-004 | 33.8978 |
| Apartments Mid Rise | 3.94697e+006 | 1,257.5879 | 0.0519 | 0.0107 | 1,262.0869 |
| General Office Building | 584550 | 186.2502 | 7.6900e-003 | 1.5900e-003 | 186.9165 |
| High Turnover (Sit Down Restaurant) | 1.58904e+006 | 506.3022 | 0.0209 | 4.3200e-003 | 508.1135 |
| Hotel | 550308 | 175.3399 | 7.2400e-003 | 1.5000e-003 | 175.9672 |
| Quality Restaurant | 353120 | 112.5116 | 4.6500e-003 | 9.6000e-004 | 112.9141 |
| Regional Shopping Center | 756000 | 240.8778 | 9.9400e-003 | 2.0600e-003 | 241.7395 |
| **Total** | | **2,512.6465** | **0.1037** | **0.0215** | **2,521.6356** |

# 6.0 Area Detail

## 6.1 Mitigation Measures Area

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Mitigated | 5.1437 | 0.2950 | 10.3804 | 1.6700e-003 | | 0.0714 | 0.0714 | | 0.0714 | 0.0714 | 0.0000 | 220.9670 | 220.9670 | 0.0201 | 3.7400e-003 | 222.5835 |
| Unmitigated | 5.1437 | 0.2950 | 10.3804 | 1.6700e-003 | | 0.0714 | 0.0714 | | 0.0714 | 0.0714 | 0.0000 | 220.9670 | 220.9670 | 0.0201 | 3.7400e-003 | 222.5835 |

## 6.2 Area by SubCategory

**Unmitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Architectural Coating | 0.4137 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Consumer Products | 4.3998 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Hearth | 0.0206 | 0.1763 | 0.0750 | 1.1200e-003 | | 0.0143 | 0.0143 | | 0.0143 | 0.0143 | 0.0000 | 204.1166 | 204.1166 | 3.9100e-003 | 3.7400e-003 | 205.3295 |
| Landscaping | 0.3096 | 0.1187 | 10.3054 | 5.4000e-004 | | 0.0572 | 0.0572 | | 0.0572 | 0.0572 | 0.0000 | 16.8504 | 16.8504 | 0.0161 | 0.0000 | 17.2540 |
| **Total** | **5.1437** | **0.2950** | **10.3804** | **1.6600e-003** | | **0.0714** | **0.0714** | | **0.0714** | **0.0714** | **0.0000** | **220.9670** | **220.9670** | **0.0201** | **3.7400e-003** | **222.5835** |

## 6.2 Area by SubCategory

**Mitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | tons/yr | | | | | | | | | | MT/yr | | | | | |
| Architectural Coating | 0.4137 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Consumer Products | 4.3998 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Hearth | 0.0206 | 0.1763 | 0.0750 | 1.1200e-003 | | 0.0143 | 0.0143 | | 0.0143 | 0.0143 | 0.0000 | 204.1166 | 204.1166 | 3.9100e-003 | 3.7400e-003 | 205.3295 |
| Landscaping | 0.3096 | 0.1187 | 10.3054 | 5.4000e-004 | | 0.0572 | 0.0572 | | 0.0572 | 0.0572 | 0.0000 | 16.8504 | 16.8504 | 0.0161 | 0.0000 | 17.2540 |
| **Total** | **5.1437** | **0.2950** | **10.3804** | **1.6600e-003** | | **0.0714** | **0.0714** | | **0.0714** | **0.0714** | **0.0000** | **220.9670** | **220.9670** | **0.0201** | **3.7400e-003** | **222.5835** |

# 7.0 Water Detail

## 7.1 Mitigation Measures Water

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

| | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|
| Category | MT/yr | | | |
| Mitigated | 585.8052 | 3.0183 | 0.0755 | 683.7567 |
| Unmitigated | 585.8052 | 3.0183 | 0.0755 | 683.7567 |

## 7.2 Water by Land Use

**Unmitigated**

| | Indoor/Outdoor Use | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | Mgal | MT/yr | | | |
| Apartments Low Rise | 1.62885 / 1.02688 | 10.9095 | 0.0535 | 1.3400e-003 | 12.6471 |
| Apartments Mid Rise | 63.5252 / 40.0485 | 425.4719 | 2.0867 | 0.0523 | 493.2363 |
| General Office Building | 7.99802 / 4.90201 | 53.0719 | 0.2627 | 6.5900e-003 | 61.6019 |
| High Turnover (Sit Down Restaurant) | 10.9272 / 0.697482 | 51.2702 | 0.3580 | 8.8200e-003 | 62.8482 |
| Hotel | 1.26834 / 0.140927 | 6.1633 | 0.0416 | 1.0300e-003 | 7.5079 |
| Quality Restaurant | 2.42827 / 0.154996 | 11.3934 | 0.0796 | 1.9600e-003 | 13.9663 |
| Regional Shopping Center | 4.14806 / 2.54236 | 27.5250 | 0.1363 | 3.4200e-003 | 31.9490 |
| **Total** | | **585.8052** | **3.0183** | **0.0755** | **683.7567** |

## 7.2 Water by Land Use

**Mitigated**

| | Indoor/Outdoor Use | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | Mgal | MT/yr | | | |
| Apartments Low Rise | 1.62885 / 1.02688 | 10.9095 | 0.0535 | 1.3400e-003 | 12.6471 |
| Apartments Mid Rise | 63.5252 / 40.0485 | 425.4719 | 2.0867 | 0.0523 | 493.2363 |
| General Office Building | 7.99802 / 4.90201 | 53.0719 | 0.2627 | 6.5900e-003 | 61.6019 |
| High Turnover (Sit Down Restaurant) | 10.9272 / 0.697482 | 51.2702 | 0.3580 | 8.8200e-003 | 62.8482 |
| Hotel | 1.26834 / 0.140927 | 6.1633 | 0.0416 | 1.0300e-003 | 7.5079 |
| Quality Restaurant | 2.42827 / 0.154996 | 11.3934 | 0.0796 | 1.9600e-003 | 13.9663 |
| Regional Shopping Center | 4.14806 / 2.54236 | 27.5250 | 0.1363 | 3.4200e-003 | 31.9490 |
| **Total** | | **585.8052** | **3.0183** | **0.0755** | **683.7567** |

# 8.0 Waste Detail

## 8.1 Mitigation Measures Waste

**Category/Year**

| | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|
| | MT/yr | | | |
| Mitigated | 207.8079 | 12.2811 | 0.0000 | 514.8354 |
| Unmitigated | 207.8079 | 12.2811 | 0.0000 | 514.8354 |

## 8.2 Waste by Land Use

**Unmitigated**

| | Waste Disposed | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | tons | MT/yr | | | |
| Apartments Low Rise | 11.5 | 2.3344 | 0.1380 | 0.0000 | 5.7834 |
| Apartments Mid Rise | 448.5 | 91.0415 | 5.3804 | 0.0000 | 225.5513 |
| General Office Building | 41.85 | 8.4952 | 0.5021 | 0.0000 | 21.0464 |
| High Turnover (Sit Down Restaurant) | 428.4 | 86.9613 | 5.1393 | 0.0000 | 215.4430 |
| Hotel | 27.38 | 5.5579 | 0.3285 | 0.0000 | 13.7694 |
| Quality Restaurant | 7.3 | 1.4818 | 0.0876 | 0.0000 | 3.6712 |
| Regional Shopping Center | 58.8 | 11.9359 | 0.7054 | 0.0000 | 29.5706 |
| **Total** | | **207.8079** | **12.2811** | **0.0000** | **514.8354** |

### 8.2 Waste by Land Use

**Mitigated**

| | Waste Disposed | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|
| Land Use | tons | MT/yr | | | |
| Apartments Low Rise | 11.5 | 2.3344 | 0.1380 | 0.0000 | 5.7834 |
| Apartments Mid Rise | 448.5 | 91.0415 | 5.3804 | 0.0000 | 225.5513 |
| General Office Building | 41.85 | 8.4952 | 0.5021 | 0.0000 | 21.0464 |
| High Turnover (Sit Down Restaurant) | 428.4 | 86.9613 | 5.1393 | 0.0000 | 215.4430 |
| Hotel | 27.38 | 5.5579 | 0.3285 | 0.0000 | 13.7694 |
| Quality Restaurant | 7.3 | 1.4818 | 0.0876 | 0.0000 | 3.6712 |
| Regional Shopping Center | 58.8 | 11.9359 | 0.7054 | 0.0000 | 29.5706 |
| **Total** | | **207.8079** | **12.2811** | **0.0000** | **514.8354** |

## 9.0 Operational Offroad

| Equipment Type | Number | Hours/Day | Days/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

## 10.0 Stationary Equipment

**Fire Pumps and Emergency Generators**

| Equipment Type | Number | Hours/Day | Hours/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

**Boilers**

| Equipment Type | Number | Heat Input/Day | Heat Input/Year | Boiler Rating | Fuel Type |
|---|---|---|---|---|---|

**User Defined Equipment**

| Equipment Type | Number |
|---|---|

## 11.0 Vegetation

# Village South Specific Plan (Proposed)

**Los Angeles-South Coast County, Summer**

## 1.0 Project Characteristics

### 1.1 Land Usage

| Land Uses | Size | Metric | Lot Acreage | Floor Surface Area | Population |
|---|---|---|---|---|---|
| General Office Building | 45.00 | 1000sqft | 1.03 | 45,000.00 | 0 |
| High Turnover (Sit Down Restaurant) | 36.00 | 1000sqft | 0.83 | 36,000.00 | 0 |
| Hotel | 50.00 | Room | 1.67 | 72,600.00 | 0 |
| Quality Restaurant | 8.00 | 1000sqft | 0.18 | 8,000.00 | 0 |
| Apartments Low Rise | 25.00 | Dwelling Unit | 1.56 | 25,000.00 | 72 |
| Apartments Mid Rise | 975.00 | Dwelling Unit | 25.66 | 975,000.00 | 2789 |
| Regional Shopping Center | 56.00 | 1000sqft | 1.29 | 56,000.00 | 0 |

### 1.2 Other Project Characteristics

| | | | | | |
|---|---|---|---|---|---|
| **Urbanization** | Urban | **Wind Speed (m/s)** | 2.2 | **Precipitation Freq (Days)** | 33 |
| **Climate Zone** | 9 | | | **Operational Year** | 2028 |
| **Utility Company** | Southern California Edison | | | | |
| **CO2 Intensity (lb/MWhr)** | 702.44 | **CH4 Intensity (lb/MWhr)** | 0.029 | **N2O Intensity (lb/MWhr)** | 0.006 |

### 1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

Trips and VMT - Local hire provision

| Table Name | Column Name | Default Value | New Value |
|---|---|---|---|
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | NumberWood | 1.25 | 0.00 |
| tblFireplaces | NumberWood | 48.75 | 0.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblVehicleTrips | ST_TR | 7.16 | 6.17 |
| tblVehicleTrips | ST_TR | 6.39 | 3.87 |
| tblVehicleTrips | ST_TR | 2.46 | 1.39 |
| tblVehicleTrips | ST_TR | 158.37 | 79.82 |

| | | | |
|---|---|---|---|
| tblVehicleTrips | ST_TR | 8.19 | 3.75 |
| tblVehicleTrips | ST_TR | 94.36 | 63.99 |
| tblVehicleTrips | ST_TR | 49.97 | 10.74 |
| tblVehicleTrips | SU_TR | 6.07 | 6.16 |
| tblVehicleTrips | SU_TR | 5.86 | 4.18 |
| tblVehicleTrips | SU_TR | 1.05 | 0.69 |
| tblVehicleTrips | SU_TR | 131.84 | 78.27 |
| tblVehicleTrips | SU_TR | 5.95 | 3.20 |
| tblVehicleTrips | SU_TR | 72.16 | 57.65 |
| tblVehicleTrips | SU_TR | 25.24 | 6.39 |
| tblVehicleTrips | WD_TR | 6.59 | 5.83 |
| tblVehicleTrips | WD_TR | 6.65 | 4.13 |
| tblVehicleTrips | WD_TR | 11.03 | 6.41 |
| tblVehicleTrips | WD_TR | 127.15 | 65.80 |
| tblVehicleTrips | WD_TR | 8.17 | 3.84 |
| tblVehicleTrips | WD_TR | 89.95 | 62.64 |
| tblVehicleTrips | WD_TR | 42.70 | 9.43 |
| tblWoodstoves | NumberCatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberCatalytic | 48.75 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 48.75 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |

## 2.0 Emissions Summary

## 2.1 Overall Construction (Maximum Daily Emission)

**Unmitigated Construction**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | lb/day | | | | | | | | | | lb/day | | | | | |
| 2021 | 4.2561 | 46.4415 | 31.4494 | 0.0636 | 18.2032 | 2.0456 | 20.2488 | 9.9670 | 1.8820 | 11.8490 | 0.0000 | 6,163.4166 | 6,163.4166 | 1.9475 | 0.0000 | 6,212.1039 |
| 2022 | 4.5441 | 38.8811 | 40.8776 | 0.1240 | 8.8255 | 1.6361 | 10.4616 | 3.6369 | 1.5052 | 5.1421 | 0.0000 | 12,493.4403 | 12,493.4403 | 1.9485 | 0.0000 | 12,518.5707 |
| 2023 | 4.1534 | 25.7658 | 38.7457 | 0.1206 | 7.0088 | 0.7592 | 7.7679 | 1.8799 | 0.7136 | 2.5935 | 0.0000 | 12,150.4890 | 12,150.4890 | 0.9589 | 0.0000 | 12,174.4615 |
| 2024 | 237.0219 | 9.5478 | 14.9642 | 0.0239 | 1.2171 | 0.4694 | 1.2875 | 0.3229 | 0.4319 | 0.4621 | 0.0000 | 2,313.1808 | 2,313.1808 | 0.7166 | 0.0000 | 2,331.0956 |
| **Maximum** | **237.0219** | **46.4415** | **40.8776** | **0.1240** | **18.2032** | **2.0456** | **20.2488** | **9.9670** | **1.8820** | **11.8490** | **0.0000** | **12,493.4403** | **12,493.4403** | **1.9485** | **0.0000** | **12,518.5707** |

## 2.1 Overall Construction (Maximum Daily Emission)

**Mitigated Construction**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | lb/day | | | | | | | | | | lb/day | | | | | |
| 2021 | 4.2561 | 46.4415 | 31.4494 | 0.0636 | 18.2032 | 2.0456 | 20.2488 | 9.9670 | 1.8820 | 11.8490 | 0.0000 | 6,163.4166 | 6,163.4166 | 1.9475 | 0.0000 | 6,212.1039 |
| 2022 | 4.5441 | 38.8811 | 40.8776 | 0.1240 | 8.8255 | 1.6361 | 10.4616 | 3.6369 | 1.5052 | 5.1421 | 0.0000 | 12,493.4403 | 12,493.4403 | 1.9485 | 0.0000 | 12,518.5707 |
| 2023 | 4.1534 | 25.7658 | 38.7457 | 0.1206 | 7.0088 | 0.7592 | 7.7679 | 1.8799 | 0.7136 | 2.5935 | 0.0000 | 12,150.4890 | 12,150.4890 | 0.9589 | 0.0000 | 12,174.4615 |
| 2024 | 237.0219 | 9.5478 | 14.9642 | 0.0239 | 1.2171 | 0.4694 | 1.2875 | 0.3229 | 0.4319 | 0.4621 | 0.0000 | 2,313.1808 | 2,313.1808 | 0.7166 | 0.0000 | 2,331.0955 |
| **Maximum** | **237.0219** | **46.4415** | **40.8776** | **0.1240** | **18.2032** | **2.0456** | **20.2488** | **9.9670** | **1.8820** | **11.8490** | **0.0000** | **12,493.4403** | **12,493.4403** | **1.9485** | **0.0000** | **12,518.5707** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Percent Reduction** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** |

## 2.2 Overall Operational

### Unmitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Area | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Energy | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| Mobile | 9.8489 | 45.4304 | 114.8495 | 0.4917 | 45.9592 | 0.3360 | 46.2951 | 12.2950 | 0.3119 | 12.6070 | | 50,306.6034 | 50,306.6034 | 2.1807 | | 50,361.1208 |
| **Total** | **41.1168** | **67.2262** | **207.5497** | **0.6278** | **45.9592** | **2.4626** | **48.4217** | **12.2950** | **2.4385** | **14.7336** | **0.0000** | **76,811.1816** | **76,811.1816** | **2.8282** | **0.4832** | **77,025.8786** |

### Mitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Area | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Energy | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| Mobile | 9.8489 | 45.4304 | 114.8495 | 0.4917 | 45.9592 | 0.3360 | 46.2951 | 12.2950 | 0.3119 | 12.6070 | | 50,306.6034 | 50,306.6034 | 2.1807 | | 50,361.1208 |
| **Total** | **41.1168** | **67.2262** | **207.5497** | **0.6278** | **45.9592** | **2.4626** | **48.4217** | **12.2950** | **2.4385** | **14.7336** | **0.0000** | **76,811.1816** | **76,811.1816** | **2.8282** | **0.4832** | **77,025.8786** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Percent Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

## 3.0 Construction Detail

**Construction Phase**

| Phase Number | Phase Name | Phase Type | Start Date | End Date | Num Days Week | Num Days | Phase Description |
|---|---|---|---|---|---|---|---|
| 1 | Demolition | Demolition | 9/1/2021 | 10/12/2021 | 5 | 30 | |
| 2 | Site Preparation | Site Preparation | 10/13/2021 | 11/9/2021 | 5 | 20 | |
| 3 | Grading | Grading | 11/10/2021 | 1/11/2022 | 5 | 45 | |
| 4 | Building Construction | Building Construction | 1/12/2022 | 12/12/2023 | 5 | 500 | |
| 5 | Paving | Paving | 12/13/2023 | 1/30/2024 | 5 | 35 | |
| 6 | Architectural Coating | Architectural Coating | 1/31/2024 | 3/19/2024 | 5 | 35 | |

**Acres of Grading (Site Preparation Phase): 0**

**Acres of Grading (Grading Phase): 112.5**

**Acres of Paving: 0**

**Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)**

**OffRoad Equipment**

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

| Phase Name | Offroad Equipment Type | Amount | Usage Hours | Horse Power | Load Factor |
|---|---|---|---|---|---|
| Demolition | Concrete/Industrial Saws | 1 | 8.00 | 81 | 0.73 |
| Demolition | Excavators | 3 | 8.00 | 158 | 0.38 |
| Demolition | Rubber Tired Dozers | 2 | 8.00 | 247 | 0.40 |
| Site Preparation | Rubber Tired Dozers | 3 | 8.00 | 247 | 0.40 |
| Site Preparation | Tractors/Loaders/Backhoes | 4 | 8.00 | 97 | 0.37 |
| Grading | Excavators | 2 | 8.00 | 158 | 0.38 |
| Grading | Graders | 1 | 8.00 | 187 | 0.41 |
| Grading | Rubber Tired Dozers | 1 | 8.00 | 247 | 0.40 |
| Grading | Scrapers | 2 | 8.00 | 367 | 0.48 |
| Grading | Tractors/Loaders/Backhoes | 2 | 8.00 | 97 | 0.37 |
| Building Construction | Cranes | 1 | 7.00 | 231 | 0.29 |
| Building Construction | Forklifts | 3 | 8.00 | 89 | 0.20 |
| Building Construction | Generator Sets | 1 | 8.00 | 84 | 0.74 |
| Building Construction | Tractors/Loaders/Backhoes | 3 | 7.00 | 97 | 0.37 |
| Building Construction | Welders | 1 | 8.00 | 46 | 0.45 |
| Paving | Pavers | 2 | 8.00 | 130 | 0.42 |
| Paving | Paving Equipment | 2 | 8.00 | 132 | 0.36 |
| Paving | Rollers | 2 | 8.00 | 80 | 0.38 |
| Architectural Coating | Air Compressors | 1 | 6.00 | 78 | 0.48 |

**Trips and VMT**

| Phase Name | Offroad Equipment Count | Worker Trip Number | Vendor Trip Number | Hauling Trip Number | Worker Trip Length | Vendor Trip Length | Hauling Trip Length | Worker Vehicle Class | Vendor Vehicle Class | Hauling Vehicle Class |
|---|---|---|---|---|---|---|---|---|---|---|
| Demolition | 6 | 15.00 | 0.00 | 458.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Site Preparation | 7 | 18.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Grading | 8 | 20.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Building Construction | 9 | 801.00 | 143.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Paving | 6 | 15.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Architectural Coating | 1 | 160.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |

## 3.1 Mitigation Measures Construction

## 3.2 Demolition - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 3.3074 | 0.0000 | 3.3074 | 0.5008 | 0.0000 | 0.5008 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.1651 | 31.4407 | 21.5650 | 0.0388 | | 1.5513 | 1.5513 | | 1.4411 | 1.4411 | | 3,747.9449 | 3,747.9449 | 1.0549 | | 3,774.3174 |
| **Total** | **3.1651** | **31.4407** | **21.5650** | **0.0388** | **3.3074** | **1.5513** | **4.8588** | **0.5008** | **1.4411** | **1.9419** | | **3,747.9449** | **3,747.9449** | **1.0549** | | **3,774.3174** |

## 3.2 Demolition - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.1273 | 4.0952 | 0.9602 | 0.0119 | 0.2669 | 0.0126 | 0.2795 | 0.0732 | 0.0120 | 0.0852 | | 1,292.2413 | 1,292.2413 | 0.0877 | | 1,294.4337 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0487 | 0.0313 | 0.4282 | 1.1800e-003 | 0.1141 | 9.5000e-004 | 0.1151 | 0.0303 | 8.8000e-004 | 0.0311 | | 117.2799 | 117.2799 | 3.5200e-003 | | 117.3678 |
| **Total** | **0.1760** | **4.1265** | **1.3884** | **0.0131** | **0.3810** | **0.0135** | **0.3946** | **0.1034** | **0.0129** | **0.1163** | | **1,409.5212** | **1,409.5212** | **0.0912** | | **1,411.8015** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 3.3074 | 0.0000 | 3.3074 | 0.5008 | 0.0000 | 0.5008 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.1651 | 31.4407 | 21.5650 | 0.0388 | | 1.5513 | 1.5513 | | 1.4411 | 1.4411 | 0.0000 | 3,747.9449 | 3,747.9449 | 1.0549 | | 3,774.3174 |
| **Total** | **3.1651** | **31.4407** | **21.5650** | **0.0388** | **3.3074** | **1.5513** | **4.8588** | **0.5008** | **1.4411** | **1.9419** | **0.0000** | **3,747.9449** | **3,747.9449** | **1.0549** | | **3,774.3174** |

## 3.2 Demolition - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.1273 | 4.0952 | 0.9602 | 0.0119 | 0.2669 | 0.0126 | 0.2795 | 0.0732 | 0.0120 | 0.0852 | | 1,292.2413 | 1,292.2413 | 0.0877 | | 1,294.4337 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0487 | 0.0313 | 0.4282 | 1.1800e-003 | 0.1141 | 9.5000e-004 | 0.1151 | 0.0303 | 8.8000e-004 | 0.0311 | | 117.2799 | 117.2799 | 3.5200e-003 | | 117.3678 |
| **Total** | **0.1760** | **4.1265** | **1.3884** | **0.0131** | **0.3810** | **0.0135** | **0.3946** | **0.1034** | **0.0129** | **0.1163** | | **1,409.5212** | **1,409.5212** | **0.0912** | | **1,411.8015** |

## 3.3 Site Preparation - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 18.0663 | 0.0000 | 18.0663 | 9.9307 | 0.0000 | 9.9307 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.8882 | 40.4971 | 21.1543 | 0.0380 | | 2.0445 | 2.0445 | | 1.8809 | 1.8809 | | 3,685.6569 | 3,685.6569 | 1.1920 | | 3,715.4573 |
| **Total** | **3.8882** | **40.4971** | **21.1543** | **0.0380** | **18.0663** | **2.0445** | **20.1107** | **9.9307** | **1.8809** | **11.8116** | | **3,685.6569** | **3,685.6569** | **1.1920** | | **3,715.4573** |

## 3.3 Site Preparation - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0584 | 0.0375 | 0.5139 | 1.4100e-003 | 0.1369 | 1.1400e-003 | 0.1381 | 0.0363 | 1.0500e-003 | 0.0374 | | 140.7359 | 140.7359 | 4.2200e-003 | | 140.8414 |
| **Total** | **0.0584** | **0.0375** | **0.5139** | **1.4100e-003** | **0.1369** | **1.1400e-003** | **0.1381** | **0.0363** | **1.0500e-003** | **0.0374** | | **140.7359** | **140.7359** | **4.2200e-003** | | **140.8414** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 18.0663 | 0.0000 | 18.0663 | 9.9307 | 0.0000 | 9.9307 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.8882 | 40.4971 | 21.1543 | 0.0380 | | 2.0445 | 2.0445 | | 1.8809 | 1.8809 | 0.0000 | 3,685.6569 | 3,685.6569 | 1.1920 | | 3,715.4573 |
| **Total** | **3.8882** | **40.4971** | **21.1543** | **0.0380** | **18.0663** | **2.0445** | **20.1107** | **9.9307** | **1.8809** | **11.8116** | **0.0000** | **3,685.6569** | **3,685.6569** | **1.1920** | | **3,715.4573** |

## 3.3 Site Preparation - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0584 | 0.0375 | 0.5139 | 1.4100e-003 | 0.1369 | 1.1400e-003 | 0.1381 | 0.0363 | 1.0500e-003 | 0.0374 | | 140.7359 | 140.7359 | 4.2200e-003 | | 140.8414 |
| **Total** | **0.0584** | **0.0375** | **0.5139** | **1.4100e-003** | **0.1369** | **1.1400e-003** | **0.1381** | **0.0363** | **1.0500e-003** | **0.0374** | | **140.7359** | **140.7359** | **4.2200e-003** | | **140.8414** |

## 3.4 Grading - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 4.1912 | 46.3998 | 30.8785 | 0.0620 | | 1.9853 | 1.9853 | | 1.8265 | 1.8265 | | 6,007.0434 | 6,007.0434 | 1.9428 | | 6,055.6134 |
| **Total** | **4.1912** | **46.3998** | **30.8785** | **0.0620** | **8.6733** | **1.9853** | **10.6587** | **3.5965** | **1.8265** | **5.4230** | | **6,007.0434** | **6,007.0434** | **1.9428** | | **6,055.6134** |

## 3.4 Grading - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0649 | 0.0417 | 0.5710 | 1.5700e-003 | 0.1521 | 1.2700e-003 | 0.1534 | 0.0404 | 1.1700e-003 | 0.0415 | | 156.3732 | 156.3732 | 4.6900e-003 | | 156.4904 |
| **Total** | **0.0649** | **0.0417** | **0.5710** | **1.5700e-003** | **0.1521** | **1.2700e-003** | **0.1534** | **0.0404** | **1.1700e-003** | **0.0415** | | **156.3732** | **156.3732** | **4.6900e-003** | | **156.4904** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 4.1912 | 46.3998 | 30.8785 | 0.0620 | | 1.9853 | 1.9853 | | 1.8265 | 1.8265 | 0.0000 | 6,007.0434 | 6,007.0434 | 1.9428 | | 6,055.6134 |
| **Total** | **4.1912** | **46.3998** | **30.8785** | **0.0620** | **8.6733** | **1.9853** | **10.6587** | **3.5965** | **1.8265** | **5.4230** | **0.0000** | **6,007.0434** | **6,007.0434** | **1.9428** | | **6,055.6134** |

## 3.4 Grading - 2021

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0649 | 0.0417 | 0.5710 | 1.5700e-003 | 0.1521 | 1.2700e-003 | 0.1534 | 0.0404 | 1.1700e-003 | 0.0415 | | 156.3732 | 156.3732 | 4.6900e-003 | | 156.4904 |
| **Total** | **0.0649** | **0.0417** | **0.5710** | **1.5700e-003** | **0.1521** | **1.2700e-003** | **0.1534** | **0.0404** | **1.1700e-003** | **0.0415** | | **156.3732** | **156.3732** | **4.6900e-003** | | **156.4904** |

## 3.4 Grading - 2022

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.6248 | 38.8435 | 29.0415 | 0.0621 | | 1.6349 | 1.6349 | | 1.5041 | 1.5041 | | 6,011.4105 | 6,011.4105 | 1.9442 | | 6,060.0158 |
| **Total** | **3.6248** | **38.8435** | **29.0415** | **0.0621** | **8.6733** | **1.6349** | **10.3082** | **3.5965** | **1.5041** | **5.1006** | | **6,011.4105** | **6,011.4105** | **1.9442** | | **6,060.0158** |

## 3.4 Grading - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0607 | 0.0376 | 0.5263 | 1.5100e-003 | 0.1521 | 1.2300e-003 | 0.1534 | 0.0404 | 1.1300e-003 | 0.0415 | | 150.8754 | 150.8754 | 4.2400e-003 | | 150.9813 |
| **Total** | **0.0607** | **0.0376** | **0.5263** | **1.5100e-003** | **0.1521** | **1.2300e-003** | **0.1534** | **0.0404** | **1.1300e-003** | **0.0415** | | **150.8754** | **150.8754** | **4.2400e-003** | | **150.9813** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.6248 | 38.8435 | 29.0415 | 0.0621 | | 1.6349 | 1.6349 | | 1.5041 | 1.5041 | 0.0000 | 6,011.4105 | 6,011.4105 | 1.9442 | | 6,060.0158 |
| **Total** | **3.6248** | **38.8435** | **29.0415** | **0.0621** | **8.6733** | **1.6349** | **10.3082** | **3.5965** | **1.5041** | **5.1006** | **0.0000** | **6,011.4105** | **6,011.4105** | **1.9442** | | **6,060.0158** |

## 3.4 Grading - 2022

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0607 | 0.0376 | 0.5263 | 1.5100e-003 | 0.1521 | 1.2300e-003 | 0.1534 | 0.0404 | 1.1300e-003 | 0.0415 | | 150.8754 | 150.8754 | 4.2400e-003 | | 150.9813 |
| **Total** | **0.0607** | **0.0376** | **0.5263** | **1.5100e-003** | **0.1521** | **1.2300e-003** | **0.1534** | **0.0404** | **1.1300e-003** | **0.0415** | | **150.8754** | **150.8754** | **4.2400e-003** | | **150.9813** |

## 3.5 Building Construction - 2022

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.7062 | 15.6156 | 16.3634 | 0.0269 | | 0.8090 | 0.8090 | | 0.7612 | 0.7612 | | 2,554.3336 | 2,554.3336 | 0.6120 | | 2,569.6322 |
| **Total** | **1.7062** | **15.6156** | **16.3634** | **0.0269** | | **0.8090** | **0.8090** | | **0.7612** | **0.7612** | | **2,554.3336** | **2,554.3336** | **0.6120** | | **2,569.6322** |

## 3.5 Building Construction - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.4079 | 13.2032 | 3.4341 | 0.0364 | 0.9155 | 0.0248 | 0.9404 | 0.2636 | 0.0237 | 0.2873 | | 3,896.5482 | 3,896.5482 | 0.2236 | | 3,902.1384 |
| Worker | 2.4299 | 1.5074 | 21.0801 | 0.0607 | 6.0932 | 0.0493 | 6.1425 | 1.6163 | 0.0454 | 1.6617 | | 6,042.5585 | 6,042.5585 | 0.1697 | | 6,046.8000 |
| **Total** | **2.8378** | **14.7106** | **24.5142** | **0.0971** | **7.0087** | **0.0741** | **7.0828** | **1.8799** | **0.0691** | **1.9490** | | **9,939.1067** | **9,939.1067** | **0.3933** | | **9,948.9384** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.7062 | 15.6156 | 16.3634 | 0.0269 | | 0.8090 | 0.8090 | | 0.7612 | 0.7612 | 0.0000 | 2,554.3336 | 2,554.3336 | 0.6120 | | 2,569.6322 |
| **Total** | **1.7062** | **15.6156** | **16.3634** | **0.0269** | | **0.8090** | **0.8090** | | **0.7612** | **0.7612** | **0.0000** | **2,554.3336** | **2,554.3336** | **0.6120** | | **2,569.6322** |

## 3.5 Building Construction - 2022

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.4079 | 13.2032 | 3.4341 | 0.0364 | 0.9155 | 0.0248 | 0.9404 | 0.2636 | 0.0237 | 0.2873 | | 3,896.5482 | 3,896.5482 | 0.2236 | | 3,902.1384 |
| Worker | 2.4299 | 1.5074 | 21.0801 | 0.0607 | 6.0932 | 0.0493 | 6.1425 | 1.6163 | 0.0454 | 1.6617 | | 6,042.5585 | 6,042.5585 | 0.1697 | | 6,046.8000 |
| **Total** | **2.8378** | **14.7106** | **24.5142** | **0.0971** | **7.0087** | **0.0741** | **7.0828** | **1.8799** | **0.0691** | **1.9490** | | **9,939.1067** | **9,939.1067** | **0.3933** | | **9,948.9384** |

## 3.5 Building Construction - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.5728 | 14.3849 | 16.2440 | 0.0269 | | 0.6997 | 0.6997 | | 0.6584 | 0.6584 | | 2,555.2099 | 2,555.2099 | 0.6079 | | 2,570.4061 |
| **Total** | **1.5728** | **14.3849** | **16.2440** | **0.0269** | | **0.6997** | **0.6997** | | **0.6584** | **0.6584** | | **2,555.2099** | **2,555.2099** | **0.6079** | | **2,570.4061** |

## 3.5 Building Construction - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.3027 | 10.0181 | 3.1014 | 0.0352 | 0.9156 | 0.0116 | 0.9271 | 0.2636 | 0.0111 | 0.2747 | | 3,773.8762 | 3,773.8762 | 0.1982 | | 3,778.8300 |
| Worker | 2.2780 | 1.3628 | 19.4002 | 0.0584 | 6.0932 | 0.0479 | 6.1411 | 1.6163 | 0.0441 | 1.6604 | | 5,821.4028 | 5,821.4028 | 0.1529 | | 5,825.2254 |
| **Total** | **2.5807** | **11.3809** | **22.5017** | **0.0936** | **7.0088** | **0.0595** | **7.0682** | **1.8799** | **0.0552** | **1.9350** | | **9,595.2790** | **9,595.2790** | **0.3511** | | **9,604.0554** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.5728 | 14.3849 | 16.2440 | 0.0269 | | 0.6997 | 0.6997 | | 0.6584 | 0.6584 | 0.0000 | 2,555.2099 | 2,555.2099 | 0.6079 | | 2,570.4061 |
| **Total** | **1.5728** | **14.3849** | **16.2440** | **0.0269** | | **0.6997** | **0.6997** | | **0.6584** | **0.6584** | **0.0000** | **2,555.2099** | **2,555.2099** | **0.6079** | | **2,570.4061** |

## 3.5 Building Construction - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.3027 | 10.0181 | 3.1014 | 0.0352 | 0.9156 | 0.0116 | 0.9271 | 0.2636 | 0.0111 | 0.2747 | | 3,773.8762 | 3,773.8762 | 0.1982 | | 3,778.8300 |
| Worker | 2.2780 | 1.3628 | 19.4002 | 0.0584 | 6.0932 | 0.0479 | 6.1411 | 1.6163 | 0.0441 | 1.6604 | | 5,821.4028 | 5,821.4028 | 0.1529 | | 5,825.2254 |
| **Total** | **2.5807** | **11.3809** | **22.5017** | **0.0936** | **7.0088** | **0.0595** | **7.0682** | **1.8799** | **0.0552** | **1.9350** | | **9,595.2790** | **9,595.2790** | **0.3511** | | **9,604.0554** |

## 3.6 Paving - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.0327 | 10.1917 | 14.5842 | 0.0228 | | 0.5102 | 0.5102 | | 0.4694 | 0.4694 | | 2,207.5841 | 2,207.5841 | 0.7140 | | 2,225.4336 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **1.0327** | **10.1917** | **14.5842** | **0.0228** | | **0.5102** | **0.5102** | | **0.4694** | **0.4694** | | **2,207.5841** | **2,207.5841** | **0.7140** | | **2,225.4336** |

## 3.6 Paving - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0427 | 0.0255 | 0.3633 | 1.0900e-003 | 0.1141 | 9.0000e-004 | 0.1150 | 0.0303 | 8.3000e-004 | 0.0311 | | 109.0150 | 109.0150 | 2.8600e-003 | | 109.0866 |
| **Total** | **0.0427** | **0.0255** | **0.3633** | **1.0900e-003** | **0.1141** | **9.0000e-004** | **0.1150** | **0.0303** | **8.3000e-004** | **0.0311** | | **109.0150** | **109.0150** | **2.8600e-003** | | **109.0866** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.0327 | 10.1917 | 14.5842 | 0.0228 | | 0.5102 | 0.5102 | | 0.4694 | 0.4694 | 0.0000 | 2,207.5841 | 2,207.5841 | 0.7140 | | 2,225.4336 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **1.0327** | **10.1917** | **14.5842** | **0.0228** | | **0.5102** | **0.5102** | | **0.4694** | **0.4694** | **0.0000** | **2,207.5841** | **2,207.5841** | **0.7140** | | **2,225.4336** |

## 3.6 Paving - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0427 | 0.0255 | 0.3633 | 1.0900e-003 | 0.1141 | 9.0000e-004 | 0.1150 | 0.0303 | 8.3000e-004 | 0.0311 | | 109.0150 | 109.0150 | 2.8600e-003 | | 109.0866 |
| **Total** | **0.0427** | **0.0255** | **0.3633** | **1.0900e-003** | **0.1141** | **9.0000e-004** | **0.1150** | **0.0303** | **8.3000e-004** | **0.0311** | | **109.0150** | **109.0150** | **2.8600e-003** | | **109.0866** |

## 3.6 Paving - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 0.9882 | 9.5246 | 14.6258 | 0.0228 | | 0.4685 | 0.4685 | | 0.4310 | 0.4310 | | 2,207.5472 | 2,207.5472 | 0.7140 | | 2,225.3963 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **0.9882** | **9.5246** | **14.6258** | **0.0228** | | **0.4685** | **0.4685** | | **0.4310** | **0.4310** | | **2,207.5472** | **2,207.5472** | **0.7140** | | **2,225.3963** |

## 3.6 Paving - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0403 | 0.0233 | 0.3384 | 1.0600e-003 | 0.1141 | 8.8000e-004 | 0.1150 | 0.0303 | 8.1000e-004 | 0.0311 | | 105.6336 | 105.6336 | 2.6300e-003 | | 105.6992 |
| **Total** | **0.0403** | **0.0233** | **0.3384** | **1.0600e-003** | **0.1141** | **8.8000e-004** | **0.1150** | **0.0303** | **8.1000e-004** | **0.0311** | | **105.6336** | **105.6336** | **2.6300e-003** | | **105.6992** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 0.9882 | 9.5246 | 14.6258 | 0.0228 | | 0.4685 | 0.4685 | | 0.4310 | 0.4310 | 0.0000 | 2,207.5472 | 2,207.5472 | 0.7140 | | 2,225.3963 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **0.9882** | **9.5246** | **14.6258** | **0.0228** | | **0.4685** | **0.4685** | | **0.4310** | **0.4310** | **0.0000** | **2,207.5472** | **2,207.5472** | **0.7140** | | **2,225.3963** |

## 3.6 Paving - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0403 | 0.0233 | 0.3384 | 1.0600e-003 | 0.1141 | 8.8000e-004 | 0.1150 | 0.0303 | 8.1000e-004 | 0.0311 | | 105.6336 | 105.6336 | 2.6300e-003 | | 105.6992 |
| **Total** | **0.0403** | **0.0233** | **0.3384** | **1.0600e-003** | **0.1141** | **8.8000e-004** | **0.1150** | **0.0303** | **8.1000e-004** | **0.0311** | | **105.6336** | **105.6336** | **2.6300e-003** | | **105.6992** |

## 3.7 Architectural Coating - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Archit. Coating | 236.4115 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Off-Road | 0.1808 | 1.2188 | 1.8101 | 2.9700e-003 | | 0.0609 | 0.0609 | | 0.0609 | 0.0609 | | 281.4481 | 281.4481 | 0.0159 | | 281.8443 |
| **Total** | **236.5923** | **1.2188** | **1.8101** | **2.9700e-003** | | **0.0609** | **0.0609** | | **0.0609** | **0.0609** | | **281.4481** | **281.4481** | **0.0159** | | **281.8443** |

## 3.7 Architectural Coating - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.4296 | 0.2481 | 3.6098 | 0.0113 | 1.2171 | 9.4300e-003 | 1.2266 | 0.3229 | 8.6800e-003 | 0.3315 | | 1,126.7583 | 1,126.7583 | 0.0280 | | 1,127.4583 |
| **Total** | **0.4296** | **0.2481** | **3.6098** | **0.0113** | **1.2171** | **9.4300e-003** | **1.2266** | **0.3229** | **8.6800e-003** | **0.3315** | | **1,126.7583** | **1,126.7583** | **0.0280** | | **1,127.4583** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Archit. Coating | 236.4115 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Off-Road | 0.1808 | 1.2188 | 1.8101 | 2.9700e-003 | | 0.0609 | 0.0609 | | 0.0609 | 0.0609 | 0.0000 | 281.4481 | 281.4481 | 0.0159 | | 281.8443 |
| **Total** | **236.5923** | **1.2188** | **1.8101** | **2.9700e-003** | | **0.0609** | **0.0609** | | **0.0609** | **0.0609** | **0.0000** | **281.4481** | **281.4481** | **0.0159** | | **281.8443** |

### 3.7 Architectural Coating - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.4296 | 0.2481 | 3.6098 | 0.0113 | 1.2171 | 9.4300e-003 | 1.2266 | 0.3229 | 8.6800e-003 | 0.3315 | | 1,126.7583 | 1,126.7583 | 0.0280 | | 1,127.4583 |
| **Total** | **0.4296** | **0.2481** | **3.6098** | **0.0113** | **1.2171** | **9.4300e-003** | **1.2266** | **0.3229** | **8.6800e-003** | **0.3315** | | **1,126.7583** | **1,126.7583** | **0.0280** | | **1,127.4583** |

## 4.0 Operational Detail - Mobile

### 4.1 Mitigation Measures Mobile

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Mitigated | 9.8489 | 45.4304 | 114.8495 | 0.4917 | 45.9592 | 0.3360 | 46.2951 | 12.2950 | 0.3119 | 12.6070 | | 50,306.6034 | 50,306.6034 | 2.1807 | | 50,361.1208 |
| Unmitigated | 9.8489 | 45.4304 | 114.8495 | 0.4917 | 45.9592 | 0.3360 | 46.2951 | 12.2950 | 0.3119 | 12.6070 | | 50,306.6034 | 50,306.6034 | 2.1807 | | 50,361.1208 |

## 4.2 Trip Summary Information

| | Average Daily Trip Rate | | | Unmitigated | Mitigated |
|---|---|---|---|---|---|
| Land Use | Weekday | Saturday | Sunday | Annual VMT | Annual VMT |
| Apartments Low Rise | 145.75 | 154.25 | 154.00 | 506,227 | 506,227 |
| Apartments Mid Rise | 4,026.75 | 3,773.25 | 4075.50 | 13,660,065 | 13,660,065 |
| General Office Building | 288.45 | 62.55 | 31.05 | 706,812 | 706,812 |
| High Turnover (Sit Down Restaurant) | 2,368.80 | 2,873.52 | 2817.72 | 3,413,937 | 3,413,937 |
| Hotel | 192.00 | 187.50 | 160.00 | 445,703 | 445,703 |
| Quality Restaurant | 501.12 | 511.92 | 461.20 | 707,488 | 707,488 |
| Regional Shopping Center | 528.08 | 601.44 | 357.84 | 1,112,221 | 1,112,221 |
| Total | 8,050.95 | 8,164.43 | 8,057.31 | 20,552,452 | 20,552,452 |

## 4.3 Trip Type Information

| | Miles | | | Trip % | | | Trip Purpose % | | |
|---|---|---|---|---|---|---|---|---|---|
| Land Use | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted | Pass-by |
| Apartments Low Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| Apartments Mid Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| General Office Building | 16.60 | 8.40 | 6.90 | 33.00 | 48.00 | 19.00 | 77 | 19 | 4 |
| High Turnover (Sit Down | 16.60 | 8.40 | 6.90 | 8.50 | 72.50 | 19.00 | 37 | 20 | 43 |
| Hotel | 16.60 | 8.40 | 6.90 | 19.40 | 61.60 | 19.00 | 58 | 38 | 4 |
| Quality Restaurant | 16.60 | 8.40 | 6.90 | 12.00 | 69.00 | 19.00 | 38 | 18 | 44 |
| Regional Shopping Center | 16.60 | 8.40 | 6.90 | 16.30 | 64.70 | 19.00 | 54 | 35 | 11 |

### 4.4 Fleet Mix

| Land Use | LDA | LDT1 | LDT2 | MDV | LHD1 | LHD2 | MHD | HHD | OBUS | UBUS | MCY | SBUS | MH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Apartments Low Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Apartments Mid Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| General Office Building | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| High Turnover (Sit Down Restaurant) | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Hotel | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Quality Restaurant | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Regional Shopping Center | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |

## 5.0 Energy Detail

Historical Energy Use: N

### 5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| NaturalGas Mitigated | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| NaturalGas Unmitigated | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |

## 5.2 Energy by Land Use - NaturalGas

**Unmitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | lb/day | | | | | | | | | | lb/day | | | | | |
| Apartments Low Rise | 1119.16 | 0.0121 | 0.1031 | 0.0439 | 6.6000e-004 | | 8.3400e-003 | 8.3400e-003 | | 8.3400e-003 | 8.3400e-003 | | 131.6662 | 131.6662 | 2.5200e-003 | 2.4100e-003 | 132.4486 |
| Apartments Mid Rise | 35784.3 | 0.3859 | 3.2978 | 1.4033 | 0.0211 | | 0.2666 | 0.2666 | | 0.2666 | 0.2666 | | 4,209.9164 | 4,209.9164 | 0.0807 | 0.0772 | 4,234.9339 |
| General Office Building | 1283.42 | 0.0138 | 0.1258 | 0.1057 | 7.5000e-004 | | 9.5600e-003 | 9.5600e-003 | | 9.5600e-003 | 9.5600e-003 | | 150.9911 | 150.9911 | 2.8900e-003 | 2.7700e-003 | 151.8884 |
| High Turnover (Sit Down Restaurant) | 22759.9 | 0.2455 | 2.2314 | 1.8743 | 0.0134 | | 0.1696 | 0.1696 | | 0.1696 | 0.1696 | | 2,677.6342 | 2,677.6342 | 0.0513 | 0.0491 | 2,693.5460 |
| Hotel | 4769.72 | 0.0514 | 0.4676 | 0.3928 | 2.8100e-003 | | 0.0355 | 0.0355 | | 0.0355 | 0.0355 | | 561.1436 | 561.1436 | 0.0108 | 0.0103 | 564.4782 |
| Quality Restaurant | 5057.75 | 0.0545 | 0.4959 | 0.4165 | 2.9800e-003 | | 0.0377 | 0.0377 | | 0.0377 | 0.0377 | | 595.0298 | 595.0298 | 0.0114 | 0.0109 | 598.5658 |
| Regional Shopping Center | 251.616 | 2.7100e-003 | 0.0247 | 0.0207 | 1.5000e-004 | | 1.8700e-003 | 1.8700e-003 | | 1.8700e-003 | 1.8700e-003 | | 29.6019 | 29.6019 | 5.7000e-004 | 5.4000e-004 | 29.7778 |
| **Total** | | **0.7660** | **6.7463** | **4.2573** | **0.0418** | | **0.5292** | **0.5292** | | **0.5292** | **0.5292** | | **8,355.9832** | **8,355.9832** | **0.1602** | **0.1532** | **8,405.6387** |

## 5.2 Energy by Land Use - NaturalGas

**Mitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | lb/day | | | | | | | | | | lb/day | | | | | |
| Apartments Low Rise | 1.11916 | 0.0121 | 0.1031 | 0.0439 | 6.6000e-004 | | 8.3400e-003 | 8.3400e-003 | | 8.3400e-003 | 8.3400e-003 | | 131.6662 | 131.6662 | 2.5200e-003 | 2.4100e-003 | 132.4486 |
| Apartments Mid Rise | 35.7843 | 0.3859 | 3.2978 | 1.4033 | 0.0211 | | 0.2666 | 0.2666 | | 0.2666 | 0.2666 | | 4,209.9164 | 4,209.9164 | 0.0807 | 0.0772 | 4,234.9339 |
| General Office Building | 1.28342 | 0.0138 | 0.1258 | 0.1057 | 7.5000e-004 | | 9.5600e-003 | 9.5600e-003 | | 9.5600e-003 | 9.5600e-003 | | 150.9911 | 150.9911 | 2.8900e-003 | 2.7700e-003 | 151.8884 |
| High Turnover (Sit Down Restaurant) | 22.7599 | 0.2455 | 2.2314 | 1.8743 | 0.0134 | | 0.1696 | 0.1696 | | 0.1696 | 0.1696 | | 2,677.6342 | 2,677.6342 | 0.0513 | 0.0491 | 2,693.5460 |
| Hotel | 4.76972 | 0.0514 | 0.4676 | 0.3928 | 2.8100e-003 | | 0.0355 | 0.0355 | | 0.0355 | 0.0355 | | 561.1436 | 561.1436 | 0.0108 | 0.0103 | 564.4782 |
| Quality Restaurant | 5.05775 | 0.0545 | 0.4959 | 0.4165 | 2.9800e-003 | | 0.0377 | 0.0377 | | 0.0377 | 0.0377 | | 595.0298 | 595.0298 | 0.0114 | 0.0109 | 598.5658 |
| Regional Shopping Center | 0.251616 | 2.7100e-003 | 0.0247 | 0.0207 | 1.5000e-004 | | 1.8700e-003 | 1.8700e-003 | | 1.8700e-003 | 1.8700e-003 | | 29.6019 | 29.6019 | 5.7000e-004 | 5.4000e-004 | 29.7778 |
| **Total** | | **0.7660** | **6.7463** | **4.2573** | **0.0418** | | **0.5292** | **0.5292** | | **0.5292** | **0.5292** | | **8,355.9832** | **8,355.9832** | **0.1602** | **0.1532** | **8,405.6387** |

# 6.0 Area Detail

## 6.1 Mitigation Measures Area

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Mitigated | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Unmitigated | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |

## 6.2 Area by SubCategory

**Unmitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | lb/day | | | | | | | | | | lb/day | | | | | |
| Architectural Coating | 2.2670 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Consumer Products | 24.1085 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Hearth | 1.6500 | 14.1000 | 6.0000 | 0.0900 | | 1.1400 | 1.1400 | | 1.1400 | 1.1400 | 0.0000 | 18,000.0000 | 18,000.0000 | 0.3450 | 0.3300 | 18,106.9650 |
| Landscaping | 2.4766 | 0.9496 | 82.4430 | 4.3600e-003 | | 0.4574 | 0.4574 | | 0.4574 | 0.4574 | | 148.5950 | 148.5950 | 0.1424 | | 152.1542 |
| **Total** | **30.5020** | **15.0496** | **88.4430** | **0.0944** | | **1.5974** | **1.5974** | | **1.5974** | **1.5974** | **0.0000** | **18,148.5950** | **18,148.5950** | **0.4874** | **0.3300** | **18,259.1192** |

### 6.2 Area by SubCategory

**Mitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | lb/day | | | | | | | | | | lb/day | | | | | |
| Architectural Coating | 2.2670 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Consumer Products | 24.1085 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Hearth | 1.6500 | 14.1000 | 6.0000 | 0.0900 | | 1.1400 | 1.1400 | | 1.1400 | 1.1400 | 0.0000 | 18,000.0000 | 18,000.0000 | 0.3450 | 0.3300 | 18,106.9650 |
| Landscaping | 2.4766 | 0.9496 | 82.4430 | 4.3600e-003 | | 0.4574 | 0.4574 | | 0.4574 | 0.4574 | | 148.5950 | 148.5950 | 0.1424 | | 152.1542 |
| **Total** | **30.5020** | **15.0496** | **88.4430** | **0.0944** | | **1.5974** | **1.5974** | | **1.5974** | **1.5974** | **0.0000** | **18,148.5950** | **18,148.5950** | **0.4874** | **0.3300** | **18,259.1192** |

## 7.0 Water Detail

### 7.1 Mitigation Measures Water

## 8.0 Waste Detail

### 8.1 Mitigation Measures Waste

## 9.0 Operational Offroad

| Equipment Type | Number | Hours/Day | Days/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

## 10.0 Stationary Equipment

**Fire Pumps and Emergency Generators**

| Equipment Type | Number | Hours/Day | Hours/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

**Boilers**

| Equipment Type | Number | Heat Input/Day | Heat Input/Year | Boiler Rating | Fuel Type |
|---|---|---|---|---|---|

**User Defined Equipment**

| Equipment Type | Number |
|---|---|

## 11.0 Vegetation

# Village South Specific Plan (Proposed)

**Los Angeles-South Coast County, Winter**

## 1.0 Project Characteristics

### 1.1 Land Usage

| Land Uses | Size | Metric | Lot Acreage | Floor Surface Area | Population |
|---|---|---|---|---|---|
| General Office Building | 45.00 | 1000sqft | 1.03 | 45,000.00 | 0 |
| High Turnover (Sit Down Restaurant) | 36.00 | 1000sqft | 0.83 | 36,000.00 | 0 |
| Hotel | 50.00 | Room | 1.67 | 72,600.00 | 0 |
| Quality Restaurant | 8.00 | 1000sqft | 0.18 | 8,000.00 | 0 |
| Apartments Low Rise | 25.00 | Dwelling Unit | 1.56 | 25,000.00 | 72 |
| Apartments Mid Rise | 975.00 | Dwelling Unit | 25.66 | 975,000.00 | 2789 |
| Regional Shopping Center | 56.00 | 1000sqft | 1.29 | 56,000.00 | 0 |

### 1.2 Other Project Characteristics

| | | | | | |
|---|---|---|---|---|---|
| **Urbanization** | Urban | **Wind Speed (m/s)** | 2.2 | **Precipitation Freq (Days)** | 33 |
| **Climate Zone** | 9 | | | **Operational Year** | 2028 |
| **Utility Company** | Southern California Edison | | | | |
| **CO2 Intensity (lb/MWhr)** | 702.44 | **CH4 Intensity (lb/MWhr)** | 0.029 | **N2O Intensity (lb/MWhr)** | 0.006 |

### 1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

Trips and VMT - Local hire provision

| Table Name | Column Name | Default Value | New Value |
|---|---|---|---|
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | FireplaceWoodMass | 1,019.20 | 0.00 |
| tblFireplaces | NumberWood | 1.25 | 0.00 |
| tblFireplaces | NumberWood | 48.75 | 0.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblTripsAndVMT | WorkerTripLength | 14.70 | 10.00 |
| tblVehicleTrips | ST_TR | 7.16 | 6.17 |
| tblVehicleTrips | ST_TR | 6.39 | 3.87 |
| tblVehicleTrips | ST_TR | 2.46 | 1.39 |
| tblVehicleTrips | ST_TR | 158.37 | 79.82 |

| | | | |
|---|---|---|---|
| tblVehicleTrips | ST_TR | 8.19 | 3.75 |
| tblVehicleTrips | ST_TR | 94.36 | 63.99 |
| tblVehicleTrips | ST_TR | 49.97 | 10.74 |
| tblVehicleTrips | SU_TR | 6.07 | 6.16 |
| tblVehicleTrips | SU_TR | 5.86 | 4.18 |
| tblVehicleTrips | SU_TR | 1.05 | 0.69 |
| tblVehicleTrips | SU_TR | 131.84 | 78.27 |
| tblVehicleTrips | SU_TR | 5.95 | 3.20 |
| tblVehicleTrips | SU_TR | 72.16 | 57.65 |
| tblVehicleTrips | SU_TR | 25.24 | 6.39 |
| tblVehicleTrips | WD_TR | 6.59 | 5.83 |
| tblVehicleTrips | WD_TR | 6.65 | 4.13 |
| tblVehicleTrips | WD_TR | 11.03 | 6.41 |
| tblVehicleTrips | WD_TR | 127.15 | 65.80 |
| tblVehicleTrips | WD_TR | 8.17 | 3.84 |
| tblVehicleTrips | WD_TR | 89.95 | 62.64 |
| tblVehicleTrips | WD_TR | 42.70 | 9.43 |
| tblWoodstoves | NumberCatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberCatalytic | 48.75 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 1.25 | 0.00 |
| tblWoodstoves | NumberNoncatalytic | 48.75 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveDayYear | 25.00 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |
| tblWoodstoves | WoodstoveWoodMass | 999.60 | 0.00 |

## 2.0 Emissions Summary

## 2.1 Overall Construction (Maximum Daily Emission)

**Unmitigated Construction**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | lb/day | | | | | | | | | | lb/day | | | | | |
| 2021 | 4.2621 | 46.4460 | 31.4068 | 0.0635 | 18.2032 | 2.0456 | 20.2488 | 9.9670 | 1.8820 | 11.8490 | 0.0000 | 6,154.3377 | 6,154.3377 | 1.9472 | 0.0000 | 6,203.0186 |
| 2022 | 4.7966 | 38.8851 | 39.6338 | 0.1195 | 8.8255 | 1.6361 | 10.4616 | 3.6369 | 1.5052 | 5.1421 | 0.0000 | 12,035.3440 | 12,035.3440 | 1.9482 | 0.0000 | 12,060.6013 |
| 2023 | 4.3939 | 25.8648 | 37.5031 | 0.1162 | 7.0088 | 0.7598 | 7.7685 | 1.8799 | 0.7142 | 2.5940 | 0.0000 | 11,710.4080 | 11,710.4080 | 0.9617 | 0.0000 | 11,734.4497 |
| 2024 | 237.0656 | 9.5503 | 14.9372 | 0.0238 | 1.2171 | 0.4694 | 1.2875 | 0.3229 | 0.4319 | 0.4621 | 0.0000 | 2,307.0517 | 2,307.0517 | 0.7164 | 0.0000 | 2,324.9627 |
| **Maximum** | **237.0656** | **46.4460** | **39.6338** | **0.1195** | **18.2032** | **2.0456** | **20.2488** | **9.9670** | **1.8820** | **11.8490** | **0.0000** | **12,035.3440** | **12,035.3440** | **1.9482** | **0.0000** | **12,060.6013** |

## 2.1 Overall Construction (Maximum Daily Emission)

**Mitigated Construction**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Year | lb/day | | | | | | | | | | lb/day | | | | | |
| 2021 | 4.2621 | 46.4460 | 31.4068 | 0.0635 | 18.2032 | 2.0456 | 20.2488 | 9.9670 | 1.8820 | 11.8490 | 0.0000 | 6,154.3377 | 6,154.3377 | 1.9472 | 0.0000 | 6,203.0186 |
| 2022 | 4.7966 | 38.8851 | 39.6338 | 0.1195 | 8.8255 | 1.6361 | 10.4616 | 3.6369 | 1.5052 | 5.1421 | 0.0000 | 12,035.3440 | 12,035.3440 | 1.9482 | 0.0000 | 12,060.6013 |
| 2023 | 4.3939 | 25.8648 | 37.5031 | 0.1162 | 7.0088 | 0.7598 | 7.7685 | 1.8799 | 0.7142 | 2.5940 | 0.0000 | 11,710.4080 | 11,710.4080 | 0.9617 | 0.0000 | 11,734.4497 |
| 2024 | 237.0656 | 9.5503 | 14.9372 | 0.0238 | 1.2171 | 0.4694 | 1.2875 | 0.3229 | 0.4319 | 0.4621 | 0.0000 | 2,307.0517 | 2,307.0517 | 0.7164 | 0.0000 | 2,324.9627 |
| **Maximum** | **237.0656** | **46.4460** | **39.6338** | **0.1195** | **18.2032** | **2.0456** | **20.2488** | **9.9670** | **1.8820** | **11.8490** | **0.0000** | **12,035.3440** | **12,035.3440** | **1.9482** | **0.0000** | **12,060.6013** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Percent Reduction** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** | **0.00** |

## 2.2 Overall Operational

### Unmitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Area | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Energy | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| Mobile | 9.5233 | 45.9914 | 110.0422 | 0.4681 | 45.9592 | 0.3373 | 46.2965 | 12.2950 | 0.3132 | 12.6083 | | 47,917.8005 | 47,917.8005 | 2.1953 | | 47,972.6839 |
| **Total** | **40.7912** | **67.7872** | **202.7424** | **0.6043** | **45.9592** | **2.4640** | **48.4231** | **12.2950** | **2.4399** | **14.7349** | **0.0000** | **74,422.3787** | **74,422.3787** | **2.8429** | **0.4832** | **74,637.4417** |

### Mitigated Operational

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Area | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Energy | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| Mobile | 9.5233 | 45.9914 | 110.0422 | 0.4681 | 45.9592 | 0.3373 | 46.2965 | 12.2950 | 0.3132 | 12.6083 | | 47,917.8005 | 47,917.8005 | 2.1953 | | 47,972.6839 |
| **Total** | **40.7912** | **67.7872** | **202.7424** | **0.6043** | **45.9592** | **2.4640** | **48.4231** | **12.2950** | **2.4399** | **14.7349** | **0.0000** | **74,422.3787** | **74,422.3787** | **2.8429** | **0.4832** | **74,637.4417** |

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio-CO2 | Total CO2 | CH4 | N20 | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Percent Reduction | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

## 3.0 Construction Detail

**Construction Phase**

| Phase Number | Phase Name | Phase Type | Start Date | End Date | Num Days Week | Num Days | Phase Description |
|---|---|---|---|---|---|---|---|
| 1 | Demolition | Demolition | 9/1/2021 | 10/12/2021 | 5 | 30 | |
| 2 | Site Preparation | Site Preparation | 10/13/2021 | 11/9/2021 | 5 | 20 | |
| 3 | Grading | Grading | 11/10/2021 | 1/11/2022 | 5 | 45 | |
| 4 | Building Construction | Building Construction | 1/12/2022 | 12/12/2023 | 5 | 500 | |
| 5 | Paving | Paving | 12/13/2023 | 1/30/2024 | 5 | 35 | |
| 6 | Architectural Coating | Architectural Coating | 1/31/2024 | 3/19/2024 | 5 | 35 | |

**Acres of Grading (Site Preparation Phase): 0**

**Acres of Grading (Grading Phase): 112.5**

**Acres of Paving: 0**

**Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)**

**OffRoad Equipment**

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

| Phase Name | Offroad Equipment Type | Amount | Usage Hours | Horse Power | Load Factor |
|---|---|---|---|---|---|
| Demolition | Concrete/Industrial Saws | 1 | 8.00 | 81 | 0.73 |
| Demolition | Excavators | 3 | 8.00 | 158 | 0.38 |
| Demolition | Rubber Tired Dozers | 2 | 8.00 | 247 | 0.40 |
| Site Preparation | Rubber Tired Dozers | 3 | 8.00 | 247 | 0.40 |
| Site Preparation | Tractors/Loaders/Backhoes | 4 | 8.00 | 97 | 0.37 |
| Grading | Excavators | 2 | 8.00 | 158 | 0.38 |
| Grading | Graders | 1 | 8.00 | 187 | 0.41 |
| Grading | Rubber Tired Dozers | 1 | 8.00 | 247 | 0.40 |
| Grading | Scrapers | 2 | 8.00 | 367 | 0.48 |
| Grading | Tractors/Loaders/Backhoes | 2 | 8.00 | 97 | 0.37 |
| Building Construction | Cranes | 1 | 7.00 | 231 | 0.29 |
| Building Construction | Forklifts | 3 | 8.00 | 89 | 0.20 |
| Building Construction | Generator Sets | 1 | 8.00 | 84 | 0.74 |
| Building Construction | Tractors/Loaders/Backhoes | 3 | 7.00 | 97 | 0.37 |
| Building Construction | Welders | 1 | 8.00 | 46 | 0.45 |
| Paving | Pavers | 2 | 8.00 | 130 | 0.42 |
| Paving | Paving Equipment | 2 | 8.00 | 132 | 0.36 |
| Paving | Rollers | 2 | 8.00 | 80 | 0.38 |
| Architectural Coating | Air Compressors | 1 | 6.00 | 78 | 0.48 |

**Trips and VMT**

| Phase Name | Offroad Equipment Count | Worker Trip Number | Vendor Trip Number | Hauling Trip Number | Worker Trip Length | Vendor Trip Length | Hauling Trip Length | Worker Vehicle Class | Vendor Vehicle Class | Hauling Vehicle Class |
|---|---|---|---|---|---|---|---|---|---|---|
| Demolition | 6 | 15.00 | 0.00 | 458.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Site Preparation | 7 | 18.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Grading | 8 | 20.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Building Construction | 9 | 801.00 | 143.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Paving | 6 | 15.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |
| Architectural Coating | 1 | 160.00 | 0.00 | 0.00 | 10.00 | 6.90 | 20.00 | LD_Mix | HDT_Mix | HHDT |

## 3.1 Mitigation Measures Construction

## 3.2 Demolition - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 3.3074 | 0.0000 | 3.3074 | 0.5008 | 0.0000 | 0.5008 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.1651 | 31.4407 | 21.5650 | 0.0388 | | 1.5513 | 1.5513 | | 1.4411 | 1.4411 | | 3,747.9449 | 3,747.9449 | 1.0549 | | 3,774.3174 |
| **Total** | **3.1651** | **31.4407** | **21.5650** | **0.0388** | **3.3074** | **1.5513** | **4.8588** | **0.5008** | **1.4411** | **1.9419** | | **3,747.9449** | **3,747.9449** | **1.0549** | | **3,774.3174** |

## 3.2 Demolition - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.1304 | 4.1454 | 1.0182 | 0.0117 | 0.2669 | 0.0128 | 0.2797 | 0.0732 | 0.0122 | 0.0854 | | 1,269.8555 | 1,269.8555 | 0.0908 | | 1,272.1252 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0532 | 0.0346 | 0.3963 | 1.1100e-003 | 0.1141 | 9.5000e-004 | 0.1151 | 0.0303 | 8.8000e-004 | 0.0311 | | 110.4707 | 110.4707 | 3.3300e-003 | | 110.5539 |
| **Total** | **0.1835** | **4.1800** | **1.4144** | **0.0128** | **0.3810** | **0.0137** | **0.3948** | **0.1034** | **0.0131** | **0.1165** | | **1,380.3262** | **1,380.3262** | **0.0941** | | **1,382.6791** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 3.3074 | 0.0000 | 3.3074 | 0.5008 | 0.0000 | 0.5008 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.1651 | 31.4407 | 21.5650 | 0.0388 | | 1.5513 | 1.5513 | | 1.4411 | 1.4411 | 0.0000 | 3,747.9449 | 3,747.9449 | 1.0549 | | 3,774.3174 |
| **Total** | **3.1651** | **31.4407** | **21.5650** | **0.0388** | **3.3074** | **1.5513** | **4.8588** | **0.5008** | **1.4411** | **1.9419** | **0.0000** | **3,747.9449** | **3,747.9449** | **1.0549** | | **3,774.3174** |

## 3.2 Demolition - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.1304 | 4.1454 | 1.0182 | 0.0117 | 0.2669 | 0.0128 | 0.2797 | 0.0732 | 0.0122 | 0.0854 | | 1,269.8555 | 1,269.8555 | 0.0908 | | 1,272.1252 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0532 | 0.0346 | 0.3963 | 1.1100e-003 | 0.1141 | 9.5000e-004 | 0.1151 | 0.0303 | 8.8000e-004 | 0.0311 | | 110.4707 | 110.4707 | 3.3300e-003 | | 110.5539 |
| **Total** | **0.1835** | **4.1800** | **1.4144** | **0.0128** | **0.3810** | **0.0137** | **0.3948** | **0.1034** | **0.0131** | **0.1165** | | **1,380.3262** | **1,380.3262** | **0.0941** | | **1,382.6791** |

## 3.3 Site Preparation - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 18.0663 | 0.0000 | 18.0663 | 9.9307 | 0.0000 | 9.9307 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.8882 | 40.4971 | 21.1543 | 0.0380 | | 2.0445 | 2.0445 | | 1.8809 | 1.8809 | | 3,685.6569 | 3,685.6569 | 1.1920 | | 3,715.4573 |
| **Total** | **3.8882** | **40.4971** | **21.1543** | **0.0380** | **18.0663** | **2.0445** | **20.1107** | **9.9307** | **1.8809** | **11.8116** | | **3,685.6569** | **3,685.6569** | **1.1920** | | **3,715.4573** |

## 3.3 Site Preparation - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0638 | 0.0415 | 0.4755 | 1.3300e-003 | 0.1369 | 1.1400e-003 | 0.1381 | 0.0363 | 1.0500e-003 | 0.0374 | | 132.5649 | 132.5649 | 3.9900e-003 | | 132.6646 |
| **Total** | **0.0638** | **0.0415** | **0.4755** | **1.3300e-003** | **0.1369** | **1.1400e-003** | **0.1381** | **0.0363** | **1.0500e-003** | **0.0374** | | **132.5649** | **132.5649** | **3.9900e-003** | | **132.6646** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 18.0663 | 0.0000 | 18.0663 | 9.9307 | 0.0000 | 9.9307 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.8882 | 40.4971 | 21.1543 | 0.0380 | | 2.0445 | 2.0445 | | 1.8809 | 1.8809 | 0.0000 | 3,685.6569 | 3,685.6569 | 1.1920 | | 3,715.4573 |
| **Total** | **3.8882** | **40.4971** | **21.1543** | **0.0380** | **18.0663** | **2.0445** | **20.1107** | **9.9307** | **1.8809** | **11.8116** | **0.0000** | **3,685.6569** | **3,685.6569** | **1.1920** | | **3,715.4573** |

## 3.3 Site Preparation - 2021

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0638 | 0.0415 | 0.4755 | 1.3300e-003 | 0.1369 | 1.1400e-003 | 0.1381 | 0.0363 | 1.0500e-003 | 0.0374 | | 132.5649 | 132.5649 | 3.9900e-003 | | 132.6646 |
| **Total** | **0.0638** | **0.0415** | **0.4755** | **1.3300e-003** | **0.1369** | **1.1400e-003** | **0.1381** | **0.0363** | **1.0500e-003** | **0.0374** | | **132.5649** | **132.5649** | **3.9900e-003** | | **132.6646** |

## 3.4 Grading - 2021

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 4.1912 | 46.3998 | 30.8785 | 0.0620 | | 1.9853 | 1.9853 | | 1.8265 | 1.8265 | | 6,007.0434 | 6,007.0434 | 1.9428 | | 6,055.6134 |
| **Total** | **4.1912** | **46.3998** | **30.8785** | **0.0620** | **8.6733** | **1.9853** | **10.6587** | **3.5965** | **1.8265** | **5.4230** | | **6,007.0434** | **6,007.0434** | **1.9428** | | **6,055.6134** |

## 3.4 Grading - 2021

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0709 | 0.0462 | 0.5284 | 1.4800e-003 | 0.1521 | 1.2700e-003 | 0.1534 | 0.0404 | 1.1700e-003 | 0.0415 | | 147.2943 | 147.2943 | 4.4300e-003 | | 147.4051 |
| **Total** | **0.0709** | **0.0462** | **0.5284** | **1.4800e-003** | **0.1521** | **1.2700e-003** | **0.1534** | **0.0404** | **1.1700e-003** | **0.0415** | | **147.2943** | **147.2943** | **4.4300e-003** | | **147.4051** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 4.1912 | 46.3998 | 30.8785 | 0.0620 | | 1.9853 | 1.9853 | | 1.8265 | 1.8265 | 0.0000 | 6,007.0434 | 6,007.0434 | 1.9428 | | 6,055.6134 |
| **Total** | **4.1912** | **46.3998** | **30.8785** | **0.0620** | **8.6733** | **1.9853** | **10.6587** | **3.5965** | **1.8265** | **5.4230** | **0.0000** | **6,007.0434** | **6,007.0434** | **1.9428** | | **6,055.6134** |

## 3.4 Grading - 2021

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0709 | 0.0462 | 0.5284 | 1.4800e-003 | 0.1521 | 1.2700e-003 | 0.1534 | 0.0404 | 1.1700e-003 | 0.0415 | | 147.2943 | 147.2943 | 4.4300e-003 | | 147.4051 |
| **Total** | **0.0709** | **0.0462** | **0.5284** | **1.4800e-003** | **0.1521** | **1.2700e-003** | **0.1534** | **0.0404** | **1.1700e-003** | **0.0415** | | **147.2943** | **147.2943** | **4.4300e-003** | | **147.4051** |

## 3.4 Grading - 2022

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.6248 | 38.8435 | 29.0415 | 0.0621 | | 1.6349 | 1.6349 | | 1.5041 | 1.5041 | | 6,011.4105 | 6,011.4105 | 1.9442 | | 6,060.0158 |
| **Total** | **3.6248** | **38.8435** | **29.0415** | **0.0621** | **8.6733** | **1.6349** | **10.3082** | **3.5965** | **1.5041** | **5.1006** | | **6,011.4105** | **6,011.4105** | **1.9442** | | **6,060.0158** |

## 3.4 Grading - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0665 | 0.0416 | 0.4861 | 1.4300e-003 | 0.1521 | 1.2300e-003 | 0.1534 | 0.0404 | 1.1300e-003 | 0.0415 | | 142.1207 | 142.1207 | 4.0000e-003 | | 142.2207 |
| **Total** | **0.0665** | **0.0416** | **0.4861** | **1.4300e-003** | **0.1521** | **1.2300e-003** | **0.1534** | **0.0404** | **1.1300e-003** | **0.0415** | | **142.1207** | **142.1207** | **4.0000e-003** | | **142.2207** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Fugitive Dust | | | | | 8.6733 | 0.0000 | 8.6733 | 3.5965 | 0.0000 | 3.5965 | | | 0.0000 | | | 0.0000 |
| Off-Road | 3.6248 | 38.8435 | 29.0415 | 0.0621 | | 1.6349 | 1.6349 | | 1.5041 | 1.5041 | 0.0000 | 6,011.4105 | 6,011.4105 | 1.9442 | | 6,060.0158 |
| **Total** | **3.6248** | **38.8435** | **29.0415** | **0.0621** | **8.6733** | **1.6349** | **10.3082** | **3.5965** | **1.5041** | **5.1006** | **0.0000** | **6,011.4105** | **6,011.4105** | **1.9442** | | **6,060.0158** |

## 3.4 Grading - 2022

### Mitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0665 | 0.0416 | 0.4861 | 1.4300e-003 | 0.1521 | 1.2300e-003 | 0.1534 | 0.0404 | 1.1300e-003 | 0.0415 | | 142.1207 | 142.1207 | 4.0000e-003 | | 142.2207 |
| **Total** | **0.0665** | **0.0416** | **0.4861** | **1.4300e-003** | **0.1521** | **1.2300e-003** | **0.1534** | **0.0404** | **1.1300e-003** | **0.0415** | | **142.1207** | **142.1207** | **4.0000e-003** | | **142.2207** |

## 3.5 Building Construction - 2022

### Unmitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.7062 | 15.6156 | 16.3634 | 0.0269 | | 0.8090 | 0.8090 | | 0.7612 | 0.7612 | | 2,554.3336 | 2,554.3336 | 0.6120 | | 2,569.6322 |
| **Total** | **1.7062** | **15.6156** | **16.3634** | **0.0269** | | **0.8090** | **0.8090** | | **0.7612** | **0.7612** | | **2,554.3336** | **2,554.3336** | **0.6120** | | **2,569.6322** |

## 3.5 Building Construction - 2022

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.4284 | 13.1673 | 3.8005 | 0.0354 | 0.9155 | 0.0256 | 0.9412 | 0.2636 | 0.0245 | 0.2881 | | 3,789.0750 | 3,789.0750 | 0.2381 | | 3,795.0283 |
| Worker | 2.6620 | 1.6677 | 19.4699 | 0.0571 | 6.0932 | 0.0493 | 6.1425 | 1.6163 | 0.0454 | 1.6617 | | 5,691.9354 | 5,691.9354 | 0.1602 | | 5,695.9408 |
| **Total** | **3.0904** | **14.8350** | **23.2704** | **0.0926** | **7.0087** | **0.0749** | **7.0836** | **1.8799** | **0.0699** | **1.9498** | | **9,481.0104** | **9,481.0104** | **0.3984** | | **9,490.9691** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.7062 | 15.6156 | 16.3634 | 0.0269 | | 0.8090 | 0.8090 | | 0.7612 | 0.7612 | 0.0000 | 2,554.3336 | 2,554.3336 | 0.6120 | | 2,569.6322 |
| **Total** | **1.7062** | **15.6156** | **16.3634** | **0.0269** | | **0.8090** | **0.8090** | | **0.7612** | **0.7612** | **0.0000** | **2,554.3336** | **2,554.3336** | **0.6120** | | **2,569.6322** |

## 3.5 Building Construction - 2022

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.4284 | 13.1673 | 3.8005 | 0.0354 | 0.9155 | 0.0256 | 0.9412 | 0.2636 | 0.0245 | 0.2881 | | 3,789.0750 | 3,789.0750 | 0.2381 | | 3,795.0283 |
| Worker | 2.6620 | 1.6677 | 19.4699 | 0.0571 | 6.0932 | 0.0493 | 6.1425 | 1.6163 | 0.0454 | 1.6617 | | 5,691.9354 | 5,691.9354 | 0.1602 | | 5,695.9408 |
| **Total** | **3.0904** | **14.8350** | **23.2704** | **0.0926** | **7.0087** | **0.0749** | **7.0836** | **1.8799** | **0.0699** | **1.9498** | | **9,481.0104** | **9,481.0104** | **0.3984** | | **9,490.9691** |

## 3.5 Building Construction - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.5728 | 14.3849 | 16.2440 | 0.0269 | | 0.6997 | 0.6997 | | 0.6584 | 0.6584 | | 2,555.2099 | 2,555.2099 | 0.6079 | | 2,570.4061 |
| **Total** | **1.5728** | **14.3849** | **16.2440** | **0.0269** | | **0.6997** | **0.6997** | | **0.6584** | **0.6584** | | **2,555.2099** | **2,555.2099** | **0.6079** | | **2,570.4061** |

## 3.5 Building Construction - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.3183 | 9.9726 | 3.3771 | 0.0343 | 0.9156 | 0.0122 | 0.9277 | 0.2636 | 0.0116 | 0.2752 | | 3,671.4007 | 3,671.4007 | 0.2096 | | 3,676.6417 |
| Worker | 2.5029 | 1.5073 | 17.8820 | 0.0550 | 6.0932 | 0.0479 | 6.1411 | 1.6163 | 0.0441 | 1.6604 | | 5,483.7974 | 5,483.7974 | 0.1442 | | 5,487.4020 |
| **Total** | **2.8211** | **11.4799** | **21.2591** | **0.0893** | **7.0088** | **0.0601** | **7.0688** | **1.8799** | **0.0557** | **1.9356** | | **9,155.1981** | **9,155.1981** | **0.3538** | | **9,164.0437** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.5728 | 14.3849 | 16.2440 | 0.0269 | | 0.6997 | 0.6997 | | 0.6584 | 0.6584 | 0.0000 | 2,555.2099 | 2,555.2099 | 0.6079 | | 2,570.4061 |
| **Total** | **1.5728** | **14.3849** | **16.2440** | **0.0269** | | **0.6997** | **0.6997** | | **0.6584** | **0.6584** | **0.0000** | **2,555.2099** | **2,555.2099** | **0.6079** | | **2,570.4061** |

## 3.5 Building Construction - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.3183 | 9.9726 | 3.3771 | 0.0343 | 0.9156 | 0.0122 | 0.9277 | 0.2636 | 0.0116 | 0.2752 | | 3,671.4007 | 3,671.4007 | 0.2096 | | 3,676.6417 |
| Worker | 2.5029 | 1.5073 | 17.8820 | 0.0550 | 6.0932 | 0.0479 | 6.1411 | 1.6163 | 0.0441 | 1.6604 | | 5,483.7974 | 5,483.7974 | 0.1442 | | 5,487.4020 |
| **Total** | **2.8211** | **11.4799** | **21.2591** | **0.0893** | **7.0088** | **0.0601** | **7.0688** | **1.8799** | **0.0557** | **1.9356** | | **9,155.1981** | **9,155.1981** | **0.3538** | | **9,164.0437** |

## 3.6 Paving - 2023

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.0327 | 10.1917 | 14.5842 | 0.0228 | | 0.5102 | 0.5102 | | 0.4694 | 0.4694 | | 2,207.5841 | 2,207.5841 | 0.7140 | | 2,225.4336 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **1.0327** | **10.1917** | **14.5842** | **0.0228** | | **0.5102** | **0.5102** | | **0.4694** | **0.4694** | | **2,207.5841** | **2,207.5841** | **0.7140** | | **2,225.4336** |

## 3.6 Paving - 2023

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0469 | 0.0282 | 0.3349 | 1.0300e-003 | 0.1141 | 9.0000e-004 | 0.1150 | 0.0303 | 8.3000e-004 | 0.0311 | | 102.6928 | 102.6928 | 2.7000e-003 | | 102.7603 |
| **Total** | **0.0469** | **0.0282** | **0.3349** | **1.0300e-003** | **0.1141** | **9.0000e-004** | **0.1150** | **0.0303** | **8.3000e-004** | **0.0311** | | **102.6928** | **102.6928** | **2.7000e-003** | | **102.7603** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 1.0327 | 10.1917 | 14.5842 | 0.0228 | | 0.5102 | 0.5102 | | 0.4694 | 0.4694 | 0.0000 | 2,207.5841 | 2,207.5841 | 0.7140 | | 2,225.4336 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **1.0327** | **10.1917** | **14.5842** | **0.0228** | | **0.5102** | **0.5102** | | **0.4694** | **0.4694** | **0.0000** | **2,207.5841** | **2,207.5841** | **0.7140** | | **2,225.4336** |

## 3.6 Paving - 2023

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0469 | 0.0282 | 0.3349 | 1.0300e-003 | 0.1141 | 9.0000e-004 | 0.1150 | 0.0303 | 8.3000e-004 | 0.0311 | | 102.6928 | 102.6928 | 2.7000e-003 | | 102.7603 |
| **Total** | **0.0469** | **0.0282** | **0.3349** | **1.0300e-003** | **0.1141** | **9.0000e-004** | **0.1150** | **0.0303** | **8.3000e-004** | **0.0311** | | **102.6928** | **102.6928** | **2.7000e-003** | | **102.7603** |

## 3.6 Paving - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 0.9882 | 9.5246 | 14.6258 | 0.0228 | | 0.4685 | 0.4685 | | 0.4310 | 0.4310 | | 2,207.5472 | 2,207.5472 | 0.7140 | | 2,225.3963 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **0.9882** | **9.5246** | **14.6258** | **0.0228** | | **0.4685** | **0.4685** | | **0.4310** | **0.4310** | | **2,207.5472** | **2,207.5472** | **0.7140** | | **2,225.3963** |

## 3.6 Paving - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0444 | 0.0257 | 0.3114 | 1.0000e-003 | 0.1141 | 8.8000e-004 | 0.1150 | 0.0303 | 8.1000e-004 | 0.0311 | | 99.5045 | 99.5045 | 2.4700e-003 | | 99.5663 |
| **Total** | **0.0444** | **0.0257** | **0.3114** | **1.0000e-003** | **0.1141** | **8.8000e-004** | **0.1150** | **0.0303** | **8.1000e-004** | **0.0311** | | **99.5045** | **99.5045** | **2.4700e-003** | | **99.5663** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Off-Road | 0.9882 | 9.5246 | 14.6258 | 0.0228 | | 0.4685 | 0.4685 | | 0.4310 | 0.4310 | 0.0000 | 2,207.5472 | 2,207.5472 | 0.7140 | | 2,225.3963 |
| Paving | 0.0000 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| **Total** | **0.9882** | **9.5246** | **14.6258** | **0.0228** | | **0.4685** | **0.4685** | | **0.4310** | **0.4310** | **0.0000** | **2,207.5472** | **2,207.5472** | **0.7140** | | **2,225.3963** |

## 3.6 Paving - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.0444 | 0.0257 | 0.3114 | 1.0000e-003 | 0.1141 | 8.8000e-004 | 0.1150 | 0.0303 | 8.1000e-004 | 0.0311 | | 99.5045 | 99.5045 | 2.4700e-003 | | 99.5663 |
| **Total** | **0.0444** | **0.0257** | **0.3114** | **1.0000e-003** | **0.1141** | **8.8000e-004** | **0.1150** | **0.0303** | **8.1000e-004** | **0.0311** | | **99.5045** | **99.5045** | **2.4700e-003** | | **99.5663** |

## 3.7 Architectural Coating - 2024

**Unmitigated Construction On-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Archit. Coating | 236.4115 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Off-Road | 0.1808 | 1.2188 | 1.8101 | 2.9700e-003 | | 0.0609 | 0.0609 | | 0.0609 | 0.0609 | | 281.4481 | 281.4481 | 0.0159 | | 281.8443 |
| **Total** | **236.5923** | **1.2188** | **1.8101** | **2.9700e-003** | | **0.0609** | **0.0609** | | **0.0609** | **0.0609** | | **281.4481** | **281.4481** | **0.0159** | | **281.8443** |

## 3.7 Architectural Coating - 2024

### Unmitigated Construction Off-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.4734 | 0.2743 | 3.3220 | 0.0107 | 1.2171 | 9.4300e-003 | 1.2266 | 0.3229 | 8.6800e-003 | 0.3315 | | 1,061.3818 | 1,061.3818 | 0.0264 | | 1,062.0410 |
| **Total** | **0.4734** | **0.2743** | **3.3220** | **0.0107** | **1.2171** | **9.4300e-003** | **1.2266** | **0.3229** | **8.6800e-003** | **0.3315** | | **1,061.3818** | **1,061.3818** | **0.0264** | | **1,062.0410** |

### Mitigated Construction On-Site

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Archit. Coating | 236.4115 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Off-Road | 0.1808 | 1.2188 | 1.8101 | 2.9700e-003 | | 0.0609 | 0.0609 | | 0.0609 | 0.0609 | 0.0000 | 281.4481 | 281.4481 | 0.0159 | | 281.8443 |
| **Total** | **236.5923** | **1.2188** | **1.8101** | **2.9700e-003** | | **0.0609** | **0.0609** | | **0.0609** | **0.0609** | **0.0000** | **281.4481** | **281.4481** | **0.0159** | | **281.8443** |

### 3.7 Architectural Coating - 2024

**Mitigated Construction Off-Site**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Hauling | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Vendor | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | 0.0000 | | 0.0000 |
| Worker | 0.4734 | 0.2743 | 3.3220 | 0.0107 | 1.2171 | 9.4300e-003 | 1.2266 | 0.3229 | 8.6800e-003 | 0.3315 | | 1,061.3818 | 1,061.3818 | 0.0264 | | 1,062.0410 |
| **Total** | **0.4734** | **0.2743** | **3.3220** | **0.0107** | **1.2171** | **9.4300e-003** | **1.2266** | **0.3229** | **8.6800e-003** | **0.3315** | | **1,061.3818** | **1,061.3818** | **0.0264** | | **1,062.0410** |

## 4.0 Operational Detail - Mobile

### 4.1 Mitigation Measures Mobile

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Mitigated | 9.5233 | 45.9914 | 110.0422 | 0.4681 | 45.9592 | 0.3373 | 46.2965 | 12.2950 | 0.3132 | 12.6083 | | 47,917.8005 | 47,917.8005 | 2.1953 | | 47,972.6839 |
| Unmitigated | 9.5233 | 45.9914 | 110.0422 | 0.4681 | 45.9592 | 0.3373 | 46.2965 | 12.2950 | 0.3132 | 12.6083 | | 47,917.8005 | 47,917.8005 | 2.1953 | | 47,972.6839 |

## 4.2 Trip Summary Information

| | Average Daily Trip Rate | | | Unmitigated | Mitigated |
|---|---|---|---|---|---|
| Land Use | Weekday | Saturday | Sunday | Annual VMT | Annual VMT |
| Apartments Low Rise | 145.75 | 154.25 | 154.00 | 506,227 | 506,227 |
| Apartments Mid Rise | 4,026.75 | 3,773.25 | 4075.50 | 13,660,065 | 13,660,065 |
| General Office Building | 288.45 | 62.55 | 31.05 | 706,812 | 706,812 |
| High Turnover (Sit Down Restaurant) | 2,368.80 | 2,873.52 | 2817.72 | 3,413,937 | 3,413,937 |
| Hotel | 192.00 | 187.50 | 160.00 | 445,703 | 445,703 |
| Quality Restaurant | 501.12 | 511.92 | 461.20 | 707,488 | 707,488 |
| Regional Shopping Center | 528.08 | 601.44 | 357.84 | 1,112,221 | 1,112,221 |
| Total | 8,050.95 | 8,164.43 | 8,057.31 | 20,552,452 | 20,552,452 |

## 4.3 Trip Type Information

| | Miles | | | Trip % | | | Trip Purpose % | | |
|---|---|---|---|---|---|---|---|---|---|
| Land Use | H-W or C-W | H-S or C-C | H-O or C-NW | H-W or C-W | H-S or C-C | H-O or C-NW | Primary | Diverted | Pass-by |
| Apartments Low Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| Apartments Mid Rise | 14.70 | 5.90 | 8.70 | 40.20 | 19.20 | 40.60 | 86 | 11 | 3 |
| General Office Building | 16.60 | 8.40 | 6.90 | 33.00 | 48.00 | 19.00 | 77 | 19 | 4 |
| High Turnover (Sit Down | 16.60 | 8.40 | 6.90 | 8.50 | 72.50 | 19.00 | 37 | 20 | 43 |
| Hotel | 16.60 | 8.40 | 6.90 | 19.40 | 61.60 | 19.00 | 58 | 38 | 4 |
| Quality Restaurant | 16.60 | 8.40 | 6.90 | 12.00 | 69.00 | 19.00 | 38 | 18 | 44 |
| Regional Shopping Center | 16.60 | 8.40 | 6.90 | 16.30 | 64.70 | 19.00 | 54 | 35 | 11 |

### 4.4 Fleet Mix

| Land Use | LDA | LDT1 | LDT2 | MDV | LHD1 | LHD2 | MHD | HHD | OBUS | UBUS | MCY | SBUS | MH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Apartments Low Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Apartments Mid Rise | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| General Office Building | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| High Turnover (Sit Down Restaurant) | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Hotel | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Quality Restaurant | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |
| Regional Shopping Center | 0.543088 | 0.044216 | 0.209971 | 0.116369 | 0.014033 | 0.006332 | 0.021166 | 0.033577 | 0.002613 | 0.001817 | 0.005285 | 0.000712 | 0.000821 |

## 5.0 Energy Detail

Historical Energy Use: N

### 5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| NaturalGas Mitigated | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |
| NaturalGas Unmitigated | 0.7660 | 6.7462 | 4.2573 | 0.0418 | | 0.5292 | 0.5292 | | 0.5292 | 0.5292 | | 8,355.9832 | 8,355.9832 | 0.1602 | 0.1532 | 8,405.6387 |

## 5.2 Energy by Land Use - NaturalGas

**Unmitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | lb/day | | | | | | | | | | lb/day | | | | | |
| Apartments Low Rise | 1119.16 | 0.0121 | 0.1031 | 0.0439 | 6.6000e-004 | | 8.3400e-003 | 8.3400e-003 | | 8.3400e-003 | 8.3400e-003 | | 131.6662 | 131.6662 | 2.5200e-003 | 2.4100e-003 | 132.4486 |
| Apartments Mid Rise | 35784.3 | 0.3859 | 3.2978 | 1.4033 | 0.0211 | | 0.2666 | 0.2666 | | 0.2666 | 0.2666 | | 4,209.9164 | 4,209.9164 | 0.0807 | 0.0772 | 4,234.9339 |
| General Office Building | 1283.42 | 0.0138 | 0.1258 | 0.1057 | 7.5000e-004 | | 9.5600e-003 | 9.5600e-003 | | 9.5600e-003 | 9.5600e-003 | | 150.9911 | 150.9911 | 2.8900e-003 | 2.7700e-003 | 151.8884 |
| High Turnover (Sit Down Restaurant) | 22759.9 | 0.2455 | 2.2314 | 1.8743 | 0.0134 | | 0.1696 | 0.1696 | | 0.1696 | 0.1696 | | 2,677.6342 | 2,677.6342 | 0.0513 | 0.0491 | 2,693.5460 |
| Hotel | 4769.72 | 0.0514 | 0.4676 | 0.3928 | 2.8100e-003 | | 0.0355 | 0.0355 | | 0.0355 | 0.0355 | | 561.1436 | 561.1436 | 0.0108 | 0.0103 | 564.4782 |
| Quality Restaurant | 5057.75 | 0.0545 | 0.4959 | 0.4165 | 2.9800e-003 | | 0.0377 | 0.0377 | | 0.0377 | 0.0377 | | 595.0298 | 595.0298 | 0.0114 | 0.0109 | 598.5658 |
| Regional Shopping Center | 251.616 | 2.7100e-003 | 0.0247 | 0.0207 | 1.5000e-004 | | 1.8700e-003 | 1.8700e-003 | | 1.8700e-003 | 1.8700e-003 | | 29.6019 | 29.6019 | 5.7000e-004 | 5.4000e-004 | 29.7778 |
| **Total** | | **0.7660** | **6.7463** | **4.2573** | **0.0418** | | **0.5292** | **0.5292** | | **0.5292** | **0.5292** | | **8,355.9832** | **8,355.9832** | **0.1602** | **0.1532** | **8,405.6387** |

## 5.2 Energy by Land Use - NaturalGas

**Mitigated**

| | NaturalGas Use | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Land Use | kBTU/yr | lb/day | | | | | | | | | | lb/day | | | | | |
| Apartments Low Rise | 1.11916 | 0.0121 | 0.1031 | 0.0439 | 6.6000e-004 | | 8.3400e-003 | 8.3400e-003 | | 8.3400e-003 | 8.3400e-003 | | 131.6662 | 131.6662 | 2.5200e-003 | 2.4100e-003 | 132.4486 |
| Apartments Mid Rise | 35.7843 | 0.3859 | 3.2978 | 1.4033 | 0.0211 | | 0.2666 | 0.2666 | | 0.2666 | 0.2666 | | 4,209.9164 | 4,209.9164 | 0.0807 | 0.0772 | 4,234.9339 |
| General Office Building | 1.28342 | 0.0138 | 0.1258 | 0.1057 | 7.5000e-004 | | 9.5600e-003 | 9.5600e-003 | | 9.5600e-003 | 9.5600e-003 | | 150.9911 | 150.9911 | 2.8900e-003 | 2.7700e-003 | 151.8884 |
| High Turnover (Sit Down Restaurant) | 22.7599 | 0.2455 | 2.2314 | 1.8743 | 0.0134 | | 0.1696 | 0.1696 | | 0.1696 | 0.1696 | | 2,677.6342 | 2,677.6342 | 0.0513 | 0.0491 | 2,693.5460 |
| Hotel | 4.76972 | 0.0514 | 0.4676 | 0.3928 | 2.8100e-003 | | 0.0355 | 0.0355 | | 0.0355 | 0.0355 | | 561.1436 | 561.1436 | 0.0108 | 0.0103 | 564.4782 |
| Quality Restaurant | 5.05775 | 0.0545 | 0.4959 | 0.4165 | 2.9800e-003 | | 0.0377 | 0.0377 | | 0.0377 | 0.0377 | | 595.0298 | 595.0298 | 0.0114 | 0.0109 | 598.5658 |
| Regional Shopping Center | 0.251616 | 2.7100e-003 | 0.0247 | 0.0207 | 1.5000e-004 | | 1.8700e-003 | 1.8700e-003 | | 1.8700e-003 | 1.8700e-003 | | 29.6019 | 29.6019 | 5.7000e-004 | 5.4000e-004 | 29.7778 |
| **Total** | | **0.7660** | **6.7463** | **4.2573** | **0.0418** | | **0.5292** | **0.5292** | | **0.5292** | **0.5292** | | **8,355.9832** | **8,355.9832** | **0.1602** | **0.1532** | **8,405.6387** |

# 6.0 Area Detail

## 6.1 Mitigation Measures Area

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Category | lb/day | | | | | | | | | | lb/day | | | | | |
| Mitigated | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |
| Unmitigated | 30.5020 | 15.0496 | 88.4430 | 0.0944 | | 1.5974 | 1.5974 | | 1.5974 | 1.5974 | 0.0000 | 18,148.5950 | 18,148.5950 | 0.4874 | 0.3300 | 18,259.1192 |

## 6.2 Area by SubCategory

**Unmitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | lb/day | | | | | | | | | | lb/day | | | | | |
| Architectural Coating | 2.2670 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Consumer Products | 24.1085 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Hearth | 1.6500 | 14.1000 | 6.0000 | 0.0900 | | 1.1400 | 1.1400 | | 1.1400 | 1.1400 | 0.0000 | 18,000.0000 | 18,000.0000 | 0.3450 | 0.3300 | 18,106.9650 |
| Landscaping | 2.4766 | 0.9496 | 82.4430 | 4.3600e-003 | | 0.4574 | 0.4574 | | 0.4574 | 0.4574 | | 148.5950 | 148.5950 | 0.1424 | | 152.1542 |
| **Total** | **30.5020** | **15.0496** | **88.4430** | **0.0944** | | **1.5974** | **1.5974** | | **1.5974** | **1.5974** | **0.0000** | **18,148.5950** | **18,148.5950** | **0.4874** | **0.3300** | **18,259.1192** |

### 6.2 Area by SubCategory

**Mitigated**

| | ROG | NOx | CO | SO2 | Fugitive PM10 | Exhaust PM10 | PM10 Total | Fugitive PM2.5 | Exhaust PM2.5 | PM2.5 Total | Bio- CO2 | NBio- CO2 | Total CO2 | CH4 | N2O | CO2e |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SubCategory | lb/day | | | | | | | | | | lb/day | | | | | |
| Architectural Coating | 2.2670 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Consumer Products | 24.1085 | | | | | 0.0000 | 0.0000 | | 0.0000 | 0.0000 | | | 0.0000 | | | 0.0000 |
| Hearth | 1.6500 | 14.1000 | 6.0000 | 0.0900 | | 1.1400 | 1.1400 | | 1.1400 | 1.1400 | 0.0000 | 18,000.0000 | 18,000.0000 | 0.3450 | 0.3300 | 18,106.9650 |
| Landscaping | 2.4766 | 0.9496 | 82.4430 | 4.3600e-003 | | 0.4574 | 0.4574 | | 0.4574 | 0.4574 | | 148.5950 | 148.5950 | 0.1424 | | 152.1542 |
| **Total** | **30.5020** | **15.0496** | **88.4430** | **0.0944** | | **1.5974** | **1.5974** | | **1.5974** | **1.5974** | **0.0000** | **18,148.5950** | **18,148.5950** | **0.4874** | **0.3300** | **18,259.1192** |

## 7.0 Water Detail

### 7.1 Mitigation Measures Water

## 8.0 Waste Detail

### 8.1 Mitigation Measures Waste

## 9.0 Operational Offroad

| Equipment Type | Number | Hours/Day | Days/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

## 10.0 Stationary Equipment

**Fire Pumps and Emergency Generators**

| Equipment Type | Number | Hours/Day | Hours/Year | Horse Power | Load Factor | Fuel Type |
|---|---|---|---|---|---|---|

**Boilers**

| Equipment Type | Number | Heat Input/Day | Heat Input/Year | Boiler Rating | Fuel Type |
|---|---|---|---|---|---|

**User Defined Equipment**

| Equipment Type | Number |
|---|---|

## 11.0 Vegetation

Attachment C

| Local Hire Provision Net Change | |
|---|---|
| **Without Local Hire Provision** | |
| Total Construction GHG Emissions (MT CO2e) | 3,623 |
| Amortized (MT CO2e/year) | 120.77 |
| **With Local Hire Provision** | |
| Total Construction GHG Emissions (MT CO2e) | 3,024 |
| Amortized (MT CO2e/year) | 100.80 |
| ***% Decrease in Construction-related GHG Emissions*** | ***17%*** |

**EXHIBIT B**

SWAPE Technical Consultation, Data Analysis and Litigation Support for the Environment

**SOIL WATER AIR PROTECTION ENTERPRISE**
2656 29th Street, Suite 201
Santa Monica, California 90405
Attn: Paul Rosenfeld, Ph.D.
Mobil: (310) 795-2335
Office: (310) 452-5555
Fax: (310) 452-5550
**Email:** prosenfeld@swape.com

# *Paul Rosenfeld, Ph.D.*

**Chemical Fate and Transport & Air Dispersion Modeling**

*Principal Environmental Chemist*

**Risk Assessment & Remediation Specialist**

## Education

Ph.D. Soil Chemistry, University of Washington, 1999. Dissertation on volatile organic compound filtration.

M.S. Environmental Science, U.C. Berkeley, 1995. Thesis on organic waste economics.

B.A. Environmental Studies, U.C. Santa Barbara, 1991. Thesis on wastewater treatment.

## Professional Experience

Dr. Rosenfeld has over 25 years' experience conducting environmental investigations and risk assessments for evaluating impacts to human health, property, and ecological receptors. His expertise focuses on the fate and transport of environmental contaminants, human health risk, exposure assessment, and ecological restoration. Dr. Rosenfeld has evaluated and modeled emissions from unconventional oil drilling operations, oil spills, landfills, boilers and incinerators, process stacks, storage tanks, confined animal feeding operations, and many other industrial and agricultural sources. His project experience ranges from monitoring and modeling of pollution sources to evaluating impacts of pollution on workers at industrial facilities and residents in surrounding communities.

Dr. Rosenfeld has investigated and designed remediation programs and risk assessments for contaminated sites containing lead, heavy metals, mold, bacteria, particulate matter, petroleum hydrocarbons, chlorinated solvents, pesticides, radioactive waste, dioxins and furans, semi- and volatile organic compounds, PCBs, PAHs, perchlorate, asbestos, per- and poly-fluoroalkyl substances (PFOA/PFOS), unusual polymers, fuel oxygenates (MTBE), among other pollutants. Dr. Rosenfeld also has experience evaluating greenhouse gas emissions from various projects and is an expert on the assessment of odors from industrial and agricultural sites, as well as the evaluation of odor nuisance impacts and technologies for abatement of odorous emissions. As a principal scientist at SWAPE, Dr. Rosenfeld directs air dispersion modeling and exposure assessments. He has served as an expert witness and testified about pollution sources causing nuisance and/or personal injury at dozens of sites and has testified as an expert witness on more than ten cases involving exposure to air contaminants from industrial sources.

## Professional History:

Soil Water Air Protection Enterprise (SWAPE); 2003 to present; Principal and Founding Partner
UCLA School of Public Health; 2007 to 2011; Lecturer (Assistant Researcher)
UCLA School of Public Health; 2003 to 2006; Adjunct Professor
UCLA Environmental Science and Engineering Program; 2002-2004; Doctoral Intern Coordinator
UCLA Institute of the Environment, 2001-2002; Research Associate
Komex $H_2O$ Science, 2001 to 2003; Senior Remediation Scientist
National Groundwater Association, 2002-2004; Lecturer
San Diego State University, 1999-2001; Adjunct Professor
Anteon Corp., San Diego, 2000-2001; Remediation Project Manager
Ogden (now Amec), San Diego, 2000-2000; Remediation Project Manager
Bechtel, San Diego, California, 1999 – 2000; Risk Assessor
King County, Seattle, 1996 – 1999; Scientist
James River Corp., Washington, 1995-96; Scientist
Big Creek Lumber, Davenport, California, 1995; Scientist
Plumas Corp., California and USFS, Tahoe 1993-1995; Scientist
Peace Corps and World Wildlife Fund, St. Kitts, West Indies, 1991-1993; Scientist

## Publications:

Remy, L.L., Clay T., Byers, V., **Rosenfeld P. E.** (2019) Hospital, Health, and Community Burden After Oil Refinery Fires, Richmond, California 2007 and 2012. *Environmental Health.* 18:48

Simons, R.A., Seo, Y. **Rosenfeld, P**., (2015) Modeling the Effect of Refinery Emission On Residential Property Value. Journal of Real Estate Research. 27(3):321-342

Chen, J. A, Zapata A. R., Sutherland A. J., Molmen, D.R., Chow, B. S., Wu, L. E., **Rosenfeld, P. E.,** Hesse, R. C., (2012) Sulfur Dioxide and Volatile Organic Compound Exposure To A Community In Texas City Texas Evaluated Using Aermod and Empirical Data. *American Journal of Environmental Science*, 8(6), 622-632.

**Rosenfeld, P.E**. & Feng, L. (2011). *The Risks of Hazardous Waste.* Amsterdam: Elsevier Publishing.

Cheremisinoff, N.P., & **Rosenfeld, P.E.** (2011). *Handbook of Pollution Prevention and Cleaner Production: Best Practices in the Agrochemical Industry*, Amsterdam: Elsevier Publishing.

Gonzalez, J., Feng, L., Sutherland, A., Waller, C., Sok, H., Hesse, R., **Rosenfeld, P.** (2010). PCBs and Dioxins/Furans in Attic Dust Collected Near Former PCB Production and Secondary Copper Facilities in Sauget, IL. *Procedia Environmental Sciences*. 113–125.

Feng, L., Wu, C., Tam, L., Sutherland, A.J., Clark, J.J., **Rosenfeld, P.E.** (2010). Dioxin and Furan Blood Lipid and Attic Dust Concentrations in Populations Living Near Four Wood Treatment Facilities in the United States. *Journal of Environmental Health*. 73(6), 34-46.

Cheremisinoff, N.P., & **Rosenfeld, P.E.** (2010). *Handbook of Pollution Prevention and Cleaner Production: Best Practices in the Wood and Paper Industries.* Amsterdam: Elsevier Publishing.

Cheremisinoff, N.P., & **Rosenfeld, P.E.** (2009). *Handbook of Pollution Prevention and Cleaner Production: Best Practices in the Petroleum Industry*. Amsterdam: Elsevier Publishing.

Wu, C., Tam, L., Clark, J., **Rosenfeld, P**. (2009). Dioxin and furan blood lipid concentrations in populations living near four wood treatment facilities in the United States. *WIT Transactions on Ecology and the Environment, Air Pollution,* 123 (17), 319-327.

Tam L. K.., Wu C. D., Clark J. J. and **Rosenfeld, P.E.** (2008). A Statistical Analysis Of Attic Dust And Blood Lipid Concentrations Of Tetrachloro-p-Dibenzodioxin (TCDD) Toxicity Equivalency Quotients (TEQ) In Two Populations Near Wood Treatment Facilities. *Organohalogen Compounds*, 70, 002252-002255.

Tam L. K.., Wu C. D., Clark J. J. and **Rosenfeld, P.E.** (2008). Methods For Collect Samples For Assessing Dioxins And Other Environmental Contaminants In Attic Dust: A Review. *Organohalogen Compounds*, 70, 000527-000530.

Hensley, A.R. A. Scott, J. J. J. Clark, **Rosenfeld, P.E.** (2007). Attic Dust and Human Blood Samples Collected near a Former Wood Treatment Facility. *Environmental Research*. 105, 194-197.

**Rosenfeld, P.E.,** J. J. J. Clark, A. R. Hensley, M. Suffet. (2007). The Use of an Odor Wheel Classification for Evaluation of Human Health Risk Criteria for Compost Facilities. *Water Science & Technology* 55(5), 345-357.

**Rosenfeld, P. E.,** M. Suffet. (2007). The Anatomy Of Odour Wheels For Odours Of Drinking Water, Wastewater, Compost And The Urban Environment. *Water Science & Technology* 55(5), 335-344.

Sullivan, P. J. Clark, J.J.J., Agardy, F. J., **Rosenfeld, P.E.** (2007). *Toxic Legacy, Synthetic Toxins in the Food, Water, and Air in American Cities.* Boston Massachusetts: Elsevier Publishing

**Rosenfeld, P.E.,** and Suffet I.H. (2004). Control of Compost Odor Using High Carbon Wood Ash. *Water Science and Technology*. 49(9),171-178.

**Rosenfeld P. E.,** J.J. Clark, I.H. (Mel) Suffet (2004). The Value of An Odor-Quality-Wheel Classification Scheme For The Urban Environment. *Water Environment Federation's Technical Exhibition and Conference (WEFTEC) 2004.* New Orleans, October 2-6, 2004.

**Rosenfeld, P.E.,** and Suffet, I.H. (2004). Understanding Odorants Associated With Compost, Biomass Facilities, and the Land Application of Biosolids. *Water Science and Technology*. 49(9), 193-199.

**Rosenfeld, P.E.,** and Suffet I.H. (2004). Control of Compost Odor Using High Carbon Wood Ash, *Water Science and Technology*, 49( 9), 171-178.

**Rosenfeld, P. E**., Grey, M. A., Sellew, P. (2004). Measurement of Biosolids Odor and Odorant Emissions from Windrows, Static Pile and Biofilter. *Water Environment Research*. 76(4), 310-315.

**Rosenfeld, P.E.,** Grey, M and Suffet, M. (2002). Compost Demonstration Project, Sacramento California Using High-Carbon Wood Ash to Control Odor at a Green Materials Composting Facility. *Integrated Waste Management Board Public Affairs Office*, Publications Clearinghouse (MS–6), Sacramento, CA Publication #442-02-008.

**Rosenfeld, P.E**., and C.L. Henry. (2001). Characterization of odor emissions from three different biosolids. *Water Soil and Air Pollution*. 127(1-4), 173-191.

**Rosenfeld, P.E.,** and Henry C. L., (2000). Wood ash control of odor emissions from biosolids application. *Journal of Environmental Quality.* 29, 1662-1668.

**Rosenfeld, P.E.,** C.L. Henry and D. Bennett. (2001). Wastewater dewatering polymer affect on biosolids odor emissions and microbial activity. *Water Environment Research*. 73(4), 363-367.

**Rosenfeld, P.E.,** and C.L. Henry. (2001). Activated Carbon and Wood Ash Sorption of Wastewater, Compost, and Biosolids Odorants. *Water Environment Research*, 73, 388-393.

**Rosenfeld, P.E.,** and Henry C. L., (2001). High carbon wood ash effect on biosolids microbial activity and odor. *Water Environment Research*. 131(1-4), 247-262.

Chollack, T. and **P. Rosenfeld. (**1998). Compost Amendment Handbook For Landscaping. Prepared for and distributed by the City of Redmond, Washington State.

**Rosenfeld, P. E.** (1992). The Mount Liamuiga Crater Trail. *Heritage Magazine of St. Kitts*, 3(2).

**Rosenfeld, P. E.** (1993). High School Biogas Project to Prevent Deforestation On St. Kitts. *Biomass Users Network*, 7(1).

**Rosenfeld, P. E. (**1998). Characterization, Quantification, and Control of Odor Emissions From Biosolids Application To Forest Soil. Doctoral Thesis. University of Washington College of Forest Resources.

**Rosenfeld, P. E.** (1994). Potential Utilization of Small Diameter Trees on Sierra County Public Land. Masters thesis reprinted by the Sierra County Economic Council. Sierra County, California.

**Rosenfeld, P. E. (**1991). How to Build a Small Rural Anaerobic Digester & Uses Of Biogas In The First And Third World. Bachelors Thesis. University of California.

## Presentations:

**Rosenfeld, P.E.,** Sutherland, A; Hesse, R.; Zapata, A. (October 3-6, 2013). Air dispersion modeling of volatile organic emissions from multiple natural gas wells in Decatur, TX. *44th Western Regional Meeting, American Chemical Society.* Lecture conducted from Santa Clara, CA.

Sok, H.L.; Waller, C.C.; Feng, L.; Gonzalez, J.; Sutherland, A.J.; Wisdom-Stack, T.; Sahai, R.K.; Hesse, R.C.; **Rosenfeld, P.E.** (June 20-23, 2010). Atrazine: A Persistent Pesticide in Urban Drinking Water. *Urban Environmental Pollution*. Lecture conducted from Boston, MA.

Feng, L.; Gonzalez, J.; Sok, H.L.; Sutherland, A.J.; Waller, C.C.; Wisdom-Stack, T.; Sahai, R.K.; La, M.; Hesse, R.C.; **Rosenfeld, P.E.** (June 20-23, 2010). Bringing Environmental Justice to East St. Louis, Illinois. *Urban Environmental Pollution.* Lecture conducted from Boston, MA.

**Rosenfeld, P.E**. (April 19-23, 2009). Perfluoroctanoic Acid (PFOA) and Perfluoroactane Sulfonate (PFOS) Contamination in Drinking Water From the Use of Aqueous Film Forming Foams (AFFF) at Airports in the United States. *2009 Ground Water Summit and 2009 Ground Water Protection Council Spring Meeting*, Lecture conducted from Tuscon, AZ.

**Rosenfeld, P.E.** (April 19-23, 2009). Cost to Filter Atrazine Contamination from Drinking Water in the United States" Contamination in Drinking Water From the Use of Aqueous Film Forming Foams (AFFF) at Airports in the United States. *2009 Ground Water Summit and 2009 Ground Water Protection Council Spring Meeting*. Lecture conducted from Tuscon, AZ.

Wu, C., Tam, L., Clark, J., **Rosenfeld, P**. (20-22 July, 2009). Dioxin and furan blood lipid concentrations in populations living near four wood treatment facilities in the United States. Brebbia, C.A. and Popov, V., eds., *Air Pollution XVII: Proceedings of the Seventeenth International Conference on Modeling, Monitoring and Management of Air Pollution*. Lecture conducted from Tallinn, Estonia.

**Rosenfeld, P. E.** (October 15-18, 2007). Moss Point Community Exposure To Contaminants From A Releasing Facility. *The 23rd Annual International Conferences on Soils Sediment and Water.* Platform lecture conducted from University of Massachusetts, Amherst MA.

**Rosenfeld, P. E.** (October 15-18, 2007). The Repeated Trespass of Tritium-Contaminated Water Into A Surrounding Community Form Repeated Waste Spills From A Nuclear Power Plant. *The 23rd Annual International Conferences on Soils Sediment and Water*. Platform lecture conducted from University of Massachusetts, Amherst MA.

**Rosenfeld, P. E.** (October 15-18, 2007). Somerville Community Exposure To Contaminants From Wood Treatment Facility Emissions. The *23rd Annual International Conferences on Soils Sediment and Water*. Lecture conducted from University of Massachusetts, Amherst MA.

**Rosenfeld P. E.** (March 2007). Production, Chemical Properties, Toxicology, & Treatment Case Studies of 1,2,3-Trichloropropane (TCP). *The Association for Environmental Health and Sciences (AEHS) Annual Meeting*. Lecture conducted from San Diego, CA.

**Rosenfeld P. E.** (March 2007). Blood and Attic Sampling for Dioxin/Furan, PAH, and Metal Exposure in Florala, Alabama. *The AEHS Annual Meeting.* Lecture conducted from San Diego, CA.

Hensley A.R., Scott, A., **Rosenfeld P.E.,** Clark, J.J.J. (August 21 – 25, 2006). Dioxin Containing Attic Dust And Human Blood Samples Collected Near A Former Wood Treatment Facility. *The 26th International Symposium on Halogenated Persistent Organic Pollutants – DIOXIN2006*. Lecture conducted from Radisson SAS Scandinavia Hotel in Oslo Norway.

Hensley A.R., Scott, A., **Rosenfeld P.E.,** Clark, J.J.J. (November 4-8, 2006). Dioxin Containing Attic Dust And Human Blood Samples Collected Near A Former Wood Treatment Facility. *APHA 134 Annual Meeting & Exposition.* Lecture conducted from Boston Massachusetts.

**Paul Rosenfeld Ph.D**. (October 24-25, 2005). Fate, Transport and Persistence of PFOA and Related Chemicals. Mealey's C8/PFOA. *Science, Risk & Litigation Conference.* Lecture conducted from The Rittenhouse Hotel, Philadelphia, PA.

**Paul Rosenfeld Ph.D**. (September 19, 2005). Brominated Flame Retardants in Groundwater: Pathways to Human Ingestion, *Toxicology and Remediation PEMA Emerging Contaminant Conference*. Lecture conducted from Hilton Hotel, Irvine California.

**Paul Rosenfeld Ph.D**. (September 19, 2005). Fate, Transport, Toxicity, And Persistence of 1,2,3-TCP. *PEMA Emerging Contaminant Conference.* Lecture conducted from Hilton Hotel in Irvine, California.

**Paul Rosenfeld Ph.D**. (September 26-27, 2005). Fate, Transport and Persistence of PDBEs. *Mealey's Groundwater Conference.* Lecture conducted from Ritz Carlton Hotel, Marina Del Ray, California.

**Paul Rosenfeld Ph.D**. (June 7-8, 2005). Fate, Transport and Persistence of PFOA and Related Chemicals. *International Society of Environmental Forensics: Focus On Emerging Contaminants*. Lecture conducted from Sheraton Oceanfront Hotel, Virginia Beach, Virginia.

**Paul Rosenfeld Ph.D**. (July 21-22, 2005). Fate Transport, Persistence and Toxicology of PFOA and Related Perfluorochemicals. *2005 National Groundwater Association Ground Water And Environmental Law Conference*. Lecture conducted from Wyndham Baltimore Inner Harbor, Baltimore Maryland.

**Paul Rosenfeld Ph.D**. (July 21-22, 2005). Brominated Flame Retardants in Groundwater: Pathways to Human Ingestion, Toxicology and Remediation. *2005 National Groundwater Association Ground Water and Environmental Law Conference.* Lecture conducted from Wyndham Baltimore Inner Harbor, Baltimore Maryland.

**Paul Rosenfeld, Ph.D.** and James Clark Ph.D. and Rob Hesse R.G. (May 5-6, 2004). Tert-butyl Alcohol Liability and Toxicology, A National Problem and Unquantified Liability. *National Groundwater Association. Environmental Law Conference*. Lecture conducted from Congress Plaza Hotel, Chicago Illinois.

**Paul Rosenfeld, Ph.D.** (March 2004). Perchlorate Toxicology. *Meeting of the American Groundwater Trust*. Lecture conducted from Phoenix Arizona.

Hagemann, M.F., **Paul Rosenfeld, Ph.D.** and Rob Hesse (2004). Perchlorate Contamination of the Colorado River. *Meeting of tribal representatives*. Lecture conducted from Parker, AZ.

**Paul Rosenfeld, Ph.D.** (April 7, 2004). A National Damage Assessment Model For PCE and Dry Cleaners. *Drycleaner Symposium. California Ground Water Association*. Lecture conducted from Radison Hotel, Sacramento, California.

**Rosenfeld, P. E**., Grey, M., (June 2003) Two stage biofilter for biosolids composting odor control. *Seventh International In Situ And On Site Bioremediation Symposium Battelle Conference* Orlando, FL.

**Paul Rosenfeld, Ph.D.** and James Clark Ph.D. (February 20-21, 2003) Understanding Historical Use, Chemical Properties, Toxicity and Regulatory Guidance of 1,4 Dioxane. *National Groundwater Association. Southwest Focus Conference. Water Supply and Emerging Contaminants*.. Lecture conducted from Hyatt Regency Phoenix Arizona.

**Paul Rosenfeld, Ph.D.** (February 6-7, 2003). Underground Storage Tank Litigation and Remediation. *California CUPA Forum*. Lecture conducted from Marriott Hotel, Anaheim California.

**Paul Rosenfeld, Ph.D**. (October 23, 2002) Underground Storage Tank Litigation and Remediation. *EPA Underground Storage Tank Roundtable*. Lecture conducted from Sacramento California.

**Rosenfeld, P.E**. and Suffet, M. (October 7- 10, 2002). Understanding Odor from Compost, *Wastewater and Industrial Processes. Sixth Annual Symposium On Off Flavors in the Aquatic Environment. International Water Association*. Lecture conducted from Barcelona Spain.

**Rosenfeld, P.E**. and Suffet, M. (October 7- 10, 2002). Using High Carbon Wood Ash to Control Compost Odor. *Sixth Annual Symposium On Off Flavors in the Aquatic Environment. International Water Association*. Lecture conducted from Barcelona Spain.

**Rosenfeld, P.E.** and Grey, M. A. (September 22-24, 2002). Biocycle Composting For Coastal Sage Restoration. *Northwest Biosolids Management Association*. Lecture conducted from Vancouver Washington..

**Rosenfeld, P.E**. and Grey, M. A. (November 11-14, 2002). Using High-Carbon Wood Ash to Control Odor at a Green Materials Composting Facility. *Soil Science Society Annual Conferenc*e. Lecture conducted from Indianapolis, Maryland.

**Rosenfeld. P.E.** (September 16, 2000). Two stage biofilter for biosolids composting odor control. *Water Environment Federation.* Lecture conducted from Anaheim California.

**Rosenfeld. P.E. (**October 16, 2000). Wood ash and biofilter control of compost odor. *Biofest.* Lecture conducted from Ocean Shores, California.

**Rosenfeld, P.E. (**2000). Bioremediation Using Organic Soil Amendments. *California Resource Recovery Association*. Lecture conducted from Sacramento California.

**Rosenfeld, P.E**., C.L. Henry, R. Harrison. (1998). Oat and Grass Seed Germination and Nitrogen and Sulfur Emissions Following Biosolids Incorporation With High-Carbon Wood-Ash. *Water Environment Federation 12th Annual Residuals and Biosolids Management Conference Proceedings*. Lecture conducted from Bellevue Washington.

**Rosenfeld, P.E.**, and C.L. Henry. (1999). An evaluation of ash incorporation with biosolids for odor reduction. *Soil Science Society of America*. Lecture conducted from Salt Lake City Utah.

**Rosenfeld, P.E.**, C.L. Henry, R. Harrison. (1998). Comparison of Microbial Activity and Odor Emissions from Three Different Biosolids Applied to Forest Soil. *Brown and Caldwell.* Lecture conducted from Seattle Washington.

**Rosenfeld, P.E.**, C.L. Henry. (1998). Characterization, Quantification, and Control of Odor Emissions from Biosolids Application To Forest Soil. *Biofest.* Lecture conducted from Lake Chelan, Washington.

**Rosenfeld, P.E,** C.L. Henry, R. Harrison. (1998). Oat and Grass Seed Germination and Nitrogen and Sulfur Emissions Following Biosolids Incorporation With High-Carbon Wood-Ash. Water Environment Federation 12th Annual Residuals and Biosolids Management Conference Proceedings. Lecture conducted from Bellevue Washington.

**Rosenfeld, P.E.**, C.L. Henry, R. B. Harrison, and R. Dills. (1997). Comparison of Odor Emissions From Three Different Biosolids Applied to Forest Soil. *Soil Science Society of America*. Lecture conducted from Anaheim California.

## Teaching Experience:

UCLA Department of Environmental Health (Summer 2003 through 20010) Taught Environmental Health Science 100 to students, including undergrad, medical doctors, public health professionals and nurses. Course focused on the health effects of environmental contaminants.

National Ground Water Association, Successful Remediation Technologies. Custom Course in Sante Fe, New Mexico. May 21, 2002. Focused on fate and transport of fuel contaminants associated with underground storage tanks.

National Ground Water Association; Successful Remediation Technologies Course in Chicago Illinois. April 1, 2002. Focused on fate and transport of contaminants associated with Superfund and RCRA sites.

California Integrated Waste Management Board, April and May, 2001. Alternative Landfill Caps Seminar in San Diego, Ventura, and San Francisco. Focused on both prescriptive and innovative landfill cover design.

UCLA Department of Environmental Engineering, February 5, 2002. Seminar on Successful Remediation Technologies focusing on Groundwater Remediation.

University Of Washington, Soil Science Program, Teaching Assistant for several courses including: Soil Chemistry, Organic Soil Amendments, and Soil Stability.

U.C. Berkeley, Environmental Science Program Teaching Assistant for Environmental Science 10.

## Academic Grants Awarded:

California Integrated Waste Management Board. $41,000 grant awarded to UCLA Institute of the Environment. Goal: To investigate effect of high carbon wood ash on volatile organic emissions from compost. 2001.

Synagro Technologies, Corona California: $10,000 grant awarded to San Diego State University.
Goal: investigate effect of biosolids for restoration and remediation of degraded coastal sage soils. 2000.

King County, Department of Research and Technology, Washington State. $100,000 grant awarded to University of Washington: Goal: To investigate odor emissions from biosolids application and the effect of polymers and ash on VOC emissions. 1998.

Northwest Biosolids Management Association, Washington State. $20,000 grant awarded to investigate effect of polymers and ash on VOC emissions from biosolids. 1997.

James River Corporation, Oregon: $10,000 grant was awarded to investigate the success of genetically engineered Poplar trees with resistance to round-up. 1996.

United State Forest Service, Tahoe National Forest: $15,000 grant was awarded to investigating fire ecology of the Tahoe National Forest. 1995.

Kellogg Foundation, Washington D.C. $500 grant was awarded to construct a large anaerobic digester on St. Kitts in West Indies. 1993

## Deposition and/or Trial Testimony:

In the United States District Court For The District of New Jersey
Duarte et al, *Plaintiffs,* vs. United States Metals Refining Company et. al. *Defendant.*
Case No.: 2:17-cv-01624-ES-SCM
Rosenfeld Deposition. 6-7-2019

In the United States District Court of Southern District of Texas Galveston Division
M/T Carla Maersk, *Plaintiffs,* vs. Conti 168., Schiffahrts-GMBH & Co. Bulker KG MS "Conti Perdido" *Defendant.*
Case No.: 3:15-CV-00106 consolidated with 3:15-CV-00237
Rosenfeld Deposition. 5-9-2019

In The Superior Court of the State of California In And For The County Of Los Angeles – Santa Monica
Carole-Taddeo-Bates et al., vs. Ifran Khan et al., Defendants
Case No.: No. BC615636
Rosenfeld Deposition, 1-26-2019

In The Superior Court of the State of California In And For The County Of Los Angeles – Santa Monica
The San Gabriel Valley Council of Governments et al. vs El Adobe Apts. Inc. et al., Defendants
Case No.: No. BC646857
Rosenfeld Deposition, 10-6-2018; Trial 3-7-19

In United States District Court For The District of Colorado
Bells et al. Plaintiff vs. The 3M Company et al., Defendants
Case: No 1:16-cv-02531-RBJ
Rosenfeld Deposition, 3-15-2018 and 4-3-2018

In The District Court Of Regan County, Texas, 112th Judicial District
Phillip Bales et al., Plaintiff vs. Dow Agrosciences, LLC, et al., Defendants
Cause No 1923
Rosenfeld Deposition, 11-17-2017

In The Superior Court of the State of California In And For The County Of Contra Costa
Simons et al., Plaintiffs vs. Chevron Corporation, et al., Defendants
Cause No C12-01481
Rosenfeld Deposition, 11-20-2017

In The Circuit Court Of The Twentieth Judicial Circuit, St Clair County, Illinois
Martha Custer et al., Plaintiff vs. Cerro Flow Products, Inc., Defendants
Case No.: No. 0i9-L-2295
Rosenfeld Deposition, 8-23-2017

In The Superior Court of the State of California, For The County of Los Angeles
Warrn Gilbert and Penny Gilber, Plaintiff vs. BMW of North America LLC
Case No.: LC102019 (c/w BC582154)
Rosenfeld Deposition, 8-16-2017, Trail 8-28-2018

In the Northern District Court of Mississippi, Greenville Division
Brenda J. Cooper, et al., *Plaintiffs,* vs. Meritor Inc., et al., *Defendants*
Case Number: 4:16-cv-52-DMB-JVM
Rosenfeld Deposition: July 2017

In The Superior Court of the State of Washington, County of Snohomish
Michael Davis and Julie Davis et al., Plaintiff vs. Cedar Grove Composting Inc., Defendants
Case No.: No. 13-2-03987-5
Rosenfeld Deposition, February 2017
Trial, March 2017

In The Superior Court of the State of California, County of Alameda
Charles Spain., Plaintiff vs. Thermo Fisher Scientific, et al., Defendants
Case No.: RG14711115
Rosenfeld Deposition, September 2015

In The Iowa District Court In And For Poweshiek County
Russell D. Winburn, et al., Plaintiffs vs. Doug Hoksbergen, et al., Defendants
Case No.: LALA002187
Rosenfeld Deposition, August 2015

In The Iowa District Court For Wapello County
Jerry Dovico, et al., Plaintiffs vs. Valley View Sine LLC, et al., Defendants
Law No,: LALA105144 - Division A
Rosenfeld Deposition, August 2015

In The Iowa District Court For Wapello County
Doug Pauls, et al.,, et al., Plaintiffs vs. Richard Warren, et al., Defendants
Law No,: LALA105144 - Division A
Rosenfeld Deposition, August 2015

In The Circuit Court of Ohio County, West Virginia
Robert Andrews, et al. v. Antero, et al.
Civil Action N0. 14-C-30000
Rosenfeld Deposition, June 2015

In The Third Judicial District County of Dona Ana, New Mexico
Betty Gonzalez, et al. Plaintiffs vs. Del Oro Dairy, Del Oro Real Estate LLC, Jerry Settles and Deward DeRuyter, Defendants
Rosenfeld Deposition: July 2015

In The Iowa District Court For Muscatine County
Laurie Freeman et. al. Plaintiffs vs. Grain Processing Corporation, Defendant
Case No 4980
Rosenfeld Deposition: May 2015

In the Circuit Court of the 17th Judicial Circuit, in and For Broward County, Florida
Walter Hinton, et. al. Plaintiff, vs. City of Fort Lauderdale, Florida, a Municipality, Defendant.
Case Number CACE07030358 (26)
Rosenfeld Deposition: December 2014

In the United States District Court Western District of Oklahoma
Tommy McCarty, et al., Plaintiffs, v. Oklahoma City Landfill, LLC d/b/a Southeast Oklahoma City Landfill, et al. Defendants.
Case No. 5:12-cv-01152-C
Rosenfeld Deposition: July 2014

In the County Court of Dallas County Texas
Lisa Parr et al, *Plaintiff*, vs. Aruba et al, *Defendant.*
Case Number cc-11-01650-E
Rosenfeld Deposition: March and September 2013
Rosenfeld Trial: April 2014

In the Court of Common Pleas of Tuscarawas County Ohio
John Michael Abicht, et al., *Plaintiffs,* vs. Republic Services, Inc., et al., *Defendants*
Case Number: 2008 CT 10 0741 (Cons. w/ 2009 CV 10 0987)
Rosenfeld Deposition: October 2012

In the United States District Court of Southern District of Texas Galveston Division
Kyle Cannon, Eugene Donovan, Genaro Ramirez, Carol Sassler, and Harvey Walton, each Individually and on behalf of those similarly situated, *Plaintiffs,* vs. BP Products North America, Inc., *Defendant.*
Case 3:10-cv-00622
Rosenfeld Deposition: February 2012
Rosenfeld Trial: April 2013

In the Circuit Court of Baltimore County Maryland
Philip E. Cvach, II et al., *Plaintiffs* vs. Two Farms, Inc. d/b/a Royal Farms, Defendants
Case Number: 03-C-12-012487 OT
Rosenfeld Deposition: September 2013

**EXHIBIT C**

SWAPE Technical Consultation, Data Analysis and Litigation Support for the Environment

1640 5th St.., Suite 204 Santa
Santa Monica, California 90401
Tel: (949) 887-9013
Email: mhagemann@swape.com

## Matthew F. Hagemann, P.G., C.Hg., QSD, QSP

**Geologic and Hydrogeologic Characterization**
**Industrial Stormwater Compliance**
**Investigation and Remediation Strategies**
**Litigation Support and Testifying Expert**
**CEQA Review**

**Education:**

M.S. Degree, Geology, California State University Los Angeles, Los Angeles, CA, 1984.
B.A. Degree, Geology, Humboldt State University, Arcata, CA, 1982.

**Professional Certifications:**

California Professional Geologist
California Certified Hydrogeologist
Qualified SWPPP Developer and Practitioner

**Professional Experience:**

Matt has 25 years of experience in environmental policy, assessment and remediation. He spent nine years with the U.S. EPA in the RCRA and Superfund programs and served as EPA's Senior Science Policy Advisor in the Western Regional Office where he identified emerging threats to groundwater from perchlorate and MTBE. While with EPA, Matt also served as a Senior Hydrogeologist in the oversight of the assessment of seven major military facilities undergoing base closure. He led numerous enforcement actions under provisions of the Resource Conservation and Recovery Act (RCRA) while also working with permit holders to improve hydrogeologic characterization and water quality monitoring.

Matt has worked closely with U.S. EPA legal counsel and the technical staff of several states in the application and enforcement of RCRA, Safe Drinking Water Act and Clean Water Act regulations. Matt has trained the technical staff in the States of California, Hawaii, Nevada, Arizona and the Territory of Guam in the conduct of investigations, groundwater fundamentals, and sampling techniques.

Positions Matt has held include:

- Founding Partner, Soil/Water/Air Protection Enterprise (SWAPE) (2003 – present);
- Geology Instructor, Golden West College, 2010 – 2014;
- Senior Environmental Analyst, Komex H2O Science, Inc. (2000 -- 2003);

- Executive Director, Orange Coast Watch (2001 – 2004);
- Senior Science Policy Advisor and Hydrogeologist, U.S. Environmental Protection Agency (1989–1998);
- Hydrogeologist, National Park Service, Water Resources Division (1998 – 2000);
- Adjunct Faculty Member, San Francisco State University, Department of Geosciences (1993 – 1998);
- Instructor, College of Marin, Department of Science (1990 – 1995);
- Geologist, U.S. Forest Service (1986 – 1998); and
- Geologist, Dames & Moore (1984 – 1986).

**Senior Regulatory and Litigation Support Analyst:**

With SWAPE, Matt's responsibilities have included:

- Lead analyst and testifying expert in the review of over 100 environmental impact reports since 2003 under CEQA that identify significant issues with regard to hazardous waste, water resources, water quality, air quality, Valley Fever, greenhouse gas emissions, and geologic hazards. Make recommendations for additional mitigation measures to lead agencies at the local and county level to include additional characterization of health risks and implementation of protective measures to reduce worker exposure to hazards from toxins and Valley Fever.
- Stormwater analysis, sampling and best management practice evaluation at industrial facilities.
- Manager of a project to provide technical assistance to a community adjacent to a former Naval shipyard under a grant from the U.S. EPA.
- Technical assistance and litigation support for vapor intrusion concerns.
- Lead analyst and testifying expert in the review of environmental issues in license applications for large solar power plants before the California Energy Commission.
- Manager of a project to evaluate numerous formerly used military sites in the western U.S.
- Manager of a comprehensive evaluation of potential sources of perchlorate contamination in Southern California drinking water wells.
- Manager and designated expert for litigation support under provisions of Proposition 65 in the review of releases of gasoline to sources drinking water at major refineries and hundreds of gas stations throughout California.
- Expert witness on two cases involving MTBE litigation.
- Expert witness and litigation support on the impact of air toxins and hazards at a school.
- Expert witness in litigation at a former plywood plant.

With Komex H2O Science Inc., Matt's duties included the following:

- Senior author of a report on the extent of perchlorate contamination that was used in testimony by the former U.S. EPA Administrator and General Counsel.
- Senior researcher in the development of a comprehensive, electronically interactive chronology of MTBE use, research, and regulation.
- Senior researcher in the development of a comprehensive, electronically interactive chronology of perchlorate use, research, and regulation.
- Senior researcher in a study that estimates nationwide costs for MTBE remediation and drinking water treatment, results of which were published in newspapers nationwide and in testimony against provisions of an energy bill that would limit liability for oil companies.
- Research to support litigation to restore drinking water supplies that have been contaminated by MTBE in California and New York.

- Expert witness testimony in a case of oil production-related contamination in Mississippi.
- Lead author for a multi-volume remedial investigation report for an operating school in Los Angeles that met strict regulatory requirements and rigorous deadlines.

- Development of strategic approaches for cleanup of contaminated sites in consultation with clients and regulators.

**Executive Director:**

As Executive Director with Orange Coast Watch, Matt led efforts to restore water quality at Orange County beaches from multiple sources of contamination including urban runoff and the discharge of wastewater. In reporting to a Board of Directors that included representatives from leading Orange County universities and businesses, Matt prepared issue papers in the areas of treatment and disinfection of wastewater and control of the discharge of grease to sewer systems. Matt actively participated in the development of countywide water quality permits for the control of urban runoff and permits for the discharge of wastewater. Matt worked with other nonprofits to protect and restore water quality, including Surfrider, Natural Resources Defense Council and Orange County CoastKeeper as well as with business institutions including the Orange County Business Council.

**Hydrogeology:**

As a Senior Hydrogeologist with the U.S. Environmental Protection Agency, Matt led investigations to characterize and cleanup closing military bases, including Mare Island Naval Shipyard, Hunters Point Naval Shipyard, Treasure Island Naval Station, Alameda Naval Station, Moffett Field, Mather Army Airfield, and Sacramento Army Depot. Specific activities were as follows:

- Led efforts to model groundwater flow and contaminant transport, ensured adequacy of monitoring networks, and assessed cleanup alternatives for contaminated sediment, soil, and groundwater.
- Initiated a regional program for evaluation of groundwater sampling practices and laboratory analysis at military bases.
- Identified emerging issues, wrote technical guidance, and assisted in policy and regulation development through work on four national U.S. EPA workgroups, including the Superfund Groundwater Technical Forum and the Federal Facilities Forum.

At the request of the State of Hawaii, Matt developed a methodology to determine the vulnerability of groundwater to contamination on the islands of Maui and Oahu. He used analytical models and a GIS to show zones of vulnerability, and the results were adopted and published by the State of Hawaii and County of Maui.

As a hydrogeologist with the EPA Groundwater Protection Section, Matt worked with provisions of the Safe Drinking Water Act and NEPA to prevent drinking water contamination. Specific activities included the following:

- Received an EPA Bronze Medal for his contribution to the development of national guidance for the protection of drinking water.
- Managed the Sole Source Aquifer Program and protected the drinking water of two communities through designation under the Safe Drinking Water Act. He prepared geologic reports, conducted public hearings, and responded to public comments from residents who were very concerned about the impact of designation.

- Reviewed a number of Environmental Impact Statements for planned major developments, including large hazardous and solid waste disposal facilities, mine reclamation, and water transfer.

Matt served as a hydrogeologist with the RCRA Hazardous Waste program. Duties were as follows:

- Supervised the hydrogeologic investigation of hazardous waste sites to determine compliance with Subtitle C requirements.
- Reviewed and wrote "part B" permits for the disposal of hazardous waste.
- Conducted RCRA Corrective Action investigations of waste sites and led inspections that formed the basis for significant enforcement actions that were developed in close coordination with U.S. EPA legal counsel.
- Wrote contract specifications and supervised contractor's investigations of waste sites.

With the National Park Service, Matt directed service-wide investigations of contaminant sources to prevent degradation of water quality, including the following tasks:

- Applied pertinent laws and regulations including CERCLA, RCRA, NEPA, NRDA, and the Clean Water Act to control military, mining, and landfill contaminants.
- Conducted watershed-scale investigations of contaminants at parks, including Yellowstone and Olympic National Park.
- Identified high-levels of perchlorate in soil adjacent to a national park in New Mexico and advised park superintendent on appropriate response actions under CERCLA.
- Served as a Park Service representative on the Interagency Perchlorate Steering Committee, a national workgroup.
- Developed a program to conduct environmental compliance audits of all National Parks while serving on a national workgroup.
- Co-authored two papers on the potential for water contamination from the operation of personal watercraft and snowmobiles, these papers serving as the basis for the development of nation-wide policy on the use of these vehicles in National Parks.
- Contributed to the Federal Multi-Agency Source Water Agreement under the Clean Water Action Plan.

**Policy:**

Served senior management as the Senior Science Policy Advisor with the U.S. Environmental Protection Agency, Region 9. Activities included the following:

- Advised the Regional Administrator and senior management on emerging issues such as the potential for the gasoline additive MTBE and ammonium perchlorate to contaminate drinking water supplies.
- Shaped EPA's national response to these threats by serving on workgroups and by contributing to guidance, including the Office of Research and Development publication, Oxygenates in Water: Critical Information and Research Needs.
- Improved the technical training of EPA's scientific and engineering staff.
- Earned an EPA Bronze Medal for representing the region's 300 scientists and engineers in negotiations with the Administrator and senior management to better integrate scientific principles into the policy-making process.
- Established national protocol for the peer review of scientific documents.

**Geology:**

With the U.S. Forest Service, Matt led investigations to determine hillslope stability of areas proposed for timber harvest in the central Oregon Coast Range. Specific activities were as follows:

- Mapped geology in the field, and used aerial photographic interpretation and mathematical models to determine slope stability.
- Coordinated his research with community members who were concerned with natural resource protection.
- Characterized the geology of an aquifer that serves as the sole source of drinking water for the city of Medford, Oregon.

As a consultant with Dames and Moore, Matt led geologic investigations of two contaminated sites (later listed on the Superfund NPL) in the Portland, Oregon, area and a large hazardous waste site in eastern Oregon. Duties included the following:

- Supervised year-long effort for soil and groundwater sampling.
- Conducted aquifer tests.
- Investigated active faults beneath sites proposed for hazardous waste disposal.

**Teaching:**

From 1990 to 1998, Matt taught at least one course per semester at the community college and university levels:

- At San Francisco State University, held an adjunct faculty position and taught courses in environmental geology, oceanography (lab and lecture), hydrogeology, and groundwater contamination.
- Served as a committee member for graduate and undergraduate students.
- Taught courses in environmental geology and oceanography at the College of Marin.

Matt taught physical geology (lecture and lab and introductory geology at Golden West College in Huntington Beach, California from 2010 to 2014.

**Invited Testimony, Reports, Papers and Presentations:**

**Hagemann, M.F**., 2008. Disclosure of Hazardous Waste Issues under CEQA. Presentation to the Public Environmental Law Conference, Eugene, Oregon.

**Hagemann, M.F**., 2008. Disclosure of Hazardous Waste Issues under CEQA. Invited presentation to U.S. EPA Region 9, San Francisco, California.

**Hagemann, M.F.,** 2005. Use of Electronic Databases in Environmental Regulation, Policy Making and Public Participation. Brownfields 2005, Denver, Coloradao.

**Hagemann, M.F.,** 2004. Perchlorate Contamination of the Colorado River and Impacts to Drinking Water in Nevada and the Southwestern U.S. Presentation to a meeting of the American Groundwater Trust, Las Vegas, NV (served on conference organizing committee).

**Hagemann, M.F.**, 2004. Invited testimony to a California Senate committee hearing on air toxins at schools in Southern California, Los Angeles.

Brown, A., Farrow, J., Gray, A. and **Hagemann, M.**, 2004. An Estimate of Costs to Address MTBE Releases from Underground Storage Tanks and the Resulting Impact to Drinking Water Wells. Presentation to the Ground Water and Environmental Law Conference, National Groundwater Association.

**Hagemann, M.F.,** 2004. Perchlorate Contamination of the Colorado River and Impacts to Drinking Water in Arizona and the Southwestern U.S. Presentation to a meeting of the American Groundwater Trust, Phoenix, AZ (served on conference organizing committee).

**Hagemann, M.F.,** 2003. Perchlorate Contamination of the Colorado River and Impacts to Drinking Water in the Southwestern U.S. Invited presentation to a special committee meeting of the National Academy of Sciences, Irvine, CA.

**Hagemann, M.F**., 2003. Perchlorate Contamination of the Colorado River. Invited presentation to a tribal EPA meeting, Pechanga, CA.

**Hagemann, M.F**., 2003. Perchlorate Contamination of the Colorado River. Invited presentation to a meeting of tribal repesentatives, Parker, AZ.

**Hagemann, M.F**., 2003. Impact of Perchlorate on the Colorado River and Associated Drinking Water Supplies. Invited presentation to the Inter-Tribal Meeting, Torres Martinez Tribe.

**Hagemann, M.F**., 2003. The Emergence of Perchlorate as a Widespread Drinking Water Contaminant. Invited presentation to the U.S. EPA Region 9.

**Hagemann, M.F**., 2003. A Deductive Approach to the Assessment of Perchlorate Contamination. Invited presentation to the California Assembly Natural Resources Committee.

**Hagemann, M.F**., 2003. Perchlorate: A Cold War Legacy in Drinking Water. Presentation to a meeting of the National Groundwater Association.

**Hagemann, M.F**., 2002. From Tank to Tap: A Chronology of MTBE in Groundwater. Presentation to a meeting of the National Groundwater Association.

**Hagemann, M.F**., 2002. A Chronology of MTBE in Groundwater and an Estimate of Costs to Address Impacts to Groundwater. Presentation to the annual meeting of the Society of Environmental Journalists.

**Hagemann, M.F**., 2002. An Estimate of the Cost to Address MTBE Contamination in Groundwater (and Who Will Pay). Presentation to a meeting of the National Groundwater Association.

**Hagemann, M.F**., 2002. An Estimate of Costs to Address MTBE Releases from Underground Storage Tanks and the Resulting Impact to Drinking Water Wells. Presentation to a meeting of the U.S. EPA and State Underground Storage Tank Program managers.

**Hagemann, M.F**., 2001. From Tank to Tap: A Chronology of MTBE in Groundwater. Unpublished report.

**Hagemann, M.F**., 2001. Estimated Cleanup Cost for MTBE in Groundwater Used as Drinking Water. Unpublished report.

**Hagemann, M.F**., 2001. Estimated Costs to Address MTBE Releases from Leaking Underground Storage Tanks. Unpublished report.

**Hagemann, M.F**., and VanMouwerik, M., 1999. Potential Water Quality Concerns Related to Snowmobile Usage. Water Resources Division, National Park Service, Technical Report.

VanMouwerik, M. and **Hagemann, M.F**. 1999, Water Quality Concerns Related to Personal Watercraft Usage. Water Resources Division, National Park Service, Technical Report.

**Hagemann, M.F**., 1999, Is Dilution the Solution to Pollution in National Parks? The George Wright Society Biannual Meeting, Asheville, North Carolina.

**Hagemann, M.F**., 1997, The Potential for MTBE to Contaminate Groundwater. U.S. EPA Superfund Groundwater Technical Forum Annual Meeting, Las Vegas, Nevada.

**Hagemann, M.F**., and Gill, M., 1996, Impediments to Intrinsic Remediation, Moffett Field Naval Air Station, Conference on Intrinsic Remediation of Chlorinated Hydrocarbons, Salt Lake City.

**Hagemann, M.F**., Fukunaga, G.L., 1996, The Vulnerability of Groundwater to Anthropogenic Contaminants on the Island of Maui, Hawaii. Hawaii Water Works Association Annual Meeting, Maui, October 1996.

**Hagemann, M. F**., Fukanaga, G. L., 1996, Ranking Groundwater Vulnerability in Central Oahu, Hawaii. Proceedings, Geographic Information Systems in Environmental Resources Management, Air and Waste Management Association Publication VIP-61.

**Hagemann, M.F**., 1994. Groundwater Characterization and Cleanup at Closing Military Bases in California. Proceedings, California Groundwater Resources Association Meeting.

**Hagemann, M.**F. and Sabol, M.A., 1993. Role of the U.S. EPA in the High Plains States Groundwater Recharge Demonstration Program. Proceedings, Sixth Biennial Symposium on the Artificial Recharge of Groundwater.

**Hagemann, M.F**., 1993. U.S. EPA Policy on the Technical Impracticability of the Cleanup of DNAPL-contaminated Groundwater. California Groundwater Resources Association Meeting.

**Hagemann, M.F**., 1992. Dense Nonaqueous Phase Liquid Contamination of Groundwater: An Ounce of Prevention... Proceedings, Association of Engineering Geologists Annual Meeting, v. 35.

**Other Experience:**

Selected as subject matter expert for the California Professional Geologist licensing examination, 2009-2011.

## Kurth Nelson

**From:** De La Fe, Joleena@Wildlife <Joleena.Delafe@Wildlife.ca.gov>
**Sent:** Thursday, August 15, 2024 3:39 PM
**To:** Kurth Nelson
**Subject:** Dana Point Harbor Hotels Nesting Bird Measure

**Follow Up Flag:** Follow up
**Flag Status:** Flagged



Hi Kurth,

Thank you for the phone call today. After review of the Dana Point Harbor Hotels Project (SCH No. 2020099024), we would like to recommend that pre-construction surveys for nesting birds and raptors are conducted at least three days prior to project activities, to ensure that no nests are present. If you have any questions or concerns feel free to contact me.

Thank you!

***Joleena De La Fe***
Environmental Scientist
California Department of Fish and Wildlife
South Coast Region 5
3030 Old Ranch Parkway, Suite 400
Seal Beach, CA 90740
Cell: (858) 354-3527

# California Department of Transportation

DISTRICT 12
1750 East 4th Street, Suite 100 | SANTA ANA, CA 92705
(657) 328-6000 | FAX (657) 328-6522 TTY 711
https://dot.ca.gov/caltrans-near-me/district12

August 19, 2024

Mr. Kurth Nelson
Principal Planner
City of Dana Point
33282 Golden Lantern
Dana Point, CA 92629

File: LDR/CEQA
SCH: 2022090476
12-ORA-2020-02625
SR 1, PM 1.077

Dear Mr. Nelson,

Thank you for including the California Department of Transportation (Caltrans) in the review of the Draft Environmental Impact Report (EIR) for the Dana Point Harbor Hotels Project for the City of Dana Point. The mission of Caltrans is to provide a safe and reliable transportation network that serves all people and respects the environment.

The project proposes the demolition of the Dana Point Marina Inn, two boater service buildings, and parking areas on the project site and includes the development of two hotels among additional modifications. Regional access to the site is provided by Interstate 5 (I-5) and State Route 1 (SR 1). Caltrans is a commenting agency on this project, and has the following comments:

1. For the Revised Draft Environmental Impact Report, please include a Vehicle Miles Traveled (VMT)-based Traffic Impact Analysis to analyze the potential impact on the operation and safety for all nearby SHS facilities. For more information, please see the Caltrans VMT Focused Transportation Impact Study Guide: https://dot.ca.gov/-/media/dot-media/programs/transportation-planning/documents/sb-743/2020-05-20-approved-vmt-focused-tisg-a11y.pdf

2. Dana Point Harbor is a destination place. Please consider encouraging the use of transit among future visitors, and workers of the development. Increasing multimodal transportation will lead to a reduction to congestion, Vehicle Miles Traveled and improve air quality.

3. Caltrans encourages the design of Complete Streets that include high-quality pedestrian, bicycle, and transit facilities that are safe and comfortable for users

of all ages and abilities. Improvements may include providing secure bicycle parking, pedestrian-oriented LED lighting, and comfortable connections to nearby active transportation and/or transit facilities. Complete Streets improvements also promote regional connectivity, improve air quality, reduce congestion, promote improved first-/last-mile connections, and increase safety for all modes of transportation.

4. Caltrans looks forward to the City's discussion of existing transit route services for local, intracounty, and/or interregional bus services within the nearby proposed project location. This will also allow for regional connectivity to local rail services provided by Metrolink and Amtrak Pacific Surfliner.

5. Provide discussion on the City's multimodal mobility strategies. Please include improvement opportunities and coordination efforts with the hotel establishments. Also provide discussion on related amenities if there is to be additional demand for transit services directly or indirectly associated to this proposed project.

6. Provide adequate wayfinding signage to any transit stops within the project vicinity.

7. The proposed project is adjacent to an existing Class II bike lane along Dana Point Harbor Drive. The project proposes "infrastructure improvements necessary to facilitate pedestrian and vehicular access to and from the project site." Consider adding the following improvements to the existing bicycle facilities:

    a. Install bicycle parking as directed in the "Essentials of Bike Parking" guide created by the Association of Pedestrian and Bicycle Professionals (link to online PDF: https://www.apbp.org/Publications).

    b. Bike parking should be installed a minimum of 24" away from walls and other objects (e.g. trash cans, plants, etc.). With the growing popularity of electric bikes and cargo/utility bikes (which tend to be bigger and heavier), Caltrans also recommends that bicycle storage facilities be designed to accommodate a range of bicycle styles, sizes, and weights.

8. Please consider installing green conflict zone striping along the existing Class II bike lane along Dana Point Harbor Drive.

9. Consider installing pedestrian scale lighting along the project area. Please also provide ADA compliant directional curb ramps with truncated domes, and a

high visibility crosswalk at the intersection of Island Way and Dana Point Harbor Drive at the western end of the project.

10. Please consider including a discussion on incorporating designated areas/parking for freight delivery, package, and transportation network company's pickup and drop-off.

    In addition, establish freight pick up and drop off times that do not coincide with peak commute hours to reduce passenger vehicle conflicts and congestion for freight.

11. Any project work proposed in the vicinity of the State Right-of-Way (ROW) would require an encroachment permit and all environmental concerns must be adequately addressed. If the environmental documentation for the project does not meet Caltrans's requirements for work done within State ROW, additional documentation would be required before approval of the encroachment permit. Please coordinate with Caltrans to meet requirements for any work within or near State ROW. For specific details for Encroachment Permits procedure, please refer to the Caltrans's Encroachment Permits Manual at: http://www.dot.ca.gov/hq/traffops/developserv/permits/

Caltrans' mission is to provide a safe, sustainable, equitable, integrated, and efficient transportation system to enhance California's economy and livability. Please continue to coordinate with Caltrans for any future developments that could potentially impact State transportation facilities. If you have any questions, please do not hesitate to contact Joseph Jamoralin at Joseph.Jamoralin@dot.ca.gov.

Sincerely,

Julie Lugaro

Julie Lugaro (Aug 19, 2024 16:14 PDT)

for

Scott Shelley
Branch Chief, Regional-LDR-Transit Planning
Caltrans, District 12